


VITA

SERIES

COMPACT
K3

50 Δ t
(75/65/20°C)



| Height mm | Length mm | Stelrad UIN | Heat output | |
|--------------|--------------|----------------|-------------|--------|
| | | | Watts | Btu/hr |
| 300 | 1000 | 76303310 | 1349 | 4603 |
| | 2000 | 76303320 | 2698 | 9206 |
| 500 | 600 | 76503306 | 1234 | 4210 |
| | 700 | 76503307 | 1439 | 4910 |
| | 800 | 76503308 | 1645 | 5613 |
| | 900 | 76503309 | 1850 | 6312 |
| | 1000 | 76503310 | 2056 | 7015 |
| | 1100 | 76503311 | 2262 | 7718 |
| | 1200 | 76503312 | 2467 | 8417 |
| | 1400 | 76503314 | 2878 | 9820 |
| | 1600 | 76503316 | 3290 | 11225 |
| | 1800 | 76503318 | 3701 | 12628 |
| | 2000 | 76503320 | 4112 | 14030 |
| | 2400 | 76503324 | 4934 | 16835 |
| 600 | 400 | 76603304 | 956 | 3262 |
| | 500 | 76603305 | 1195 | 4077 |
| | 600 | 76603306 | 1433 | 4889 |
| | 700 | 76603307 | 1672 | 5705 |
| | 800 | 76603308 | 1911 | 6520 |
| | 900 | 76603309 | 2150 | 7336 |
| | 1000 | 76603310 | 2389 | 8151 |
| | 1100 | 76603311 | 2628 | 8967 |
| | 1200 | 76603312 | 2867 | 9782 |
| | 1400 | 76603314 | 3345 | 11413 |
| | 1600 | 76603316 | 3822 | 13041 |
| | 1800 | 76603318 | 4300 | 14072 |
| 2000 | 76603320 | 4778 | 16303 | |
| 2400 | 76603324 | 5734 | 19564 | |
| 700 | 500 | 76703305 | 1356 | 4627 |
| | 600 | 76703306 | 1627 | 5551 |
| | 700 | 76703307 | 1898 | 6476 |
| | 800 | 76703308 | 2170 | 7404 |
| | 900 | 76703309 | 2441 | 8329 |
| | 1000 | 76703310 | 2712 | 9253 |
| | 1100 | 76703311 | 2983 | 10178 |
| | 1200 | 76703312 | 3254 | 11103 |
| | 1400 | 76703314 | 3797 | 12955 |
| | 1600 | 76703316 | 4339 | 14805 |
| | 1800 | 76703318 | 4882 | 16657 |
| | 2000 | 76703320 | 5424 | 18507 |


Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.


REAR ELEVATION

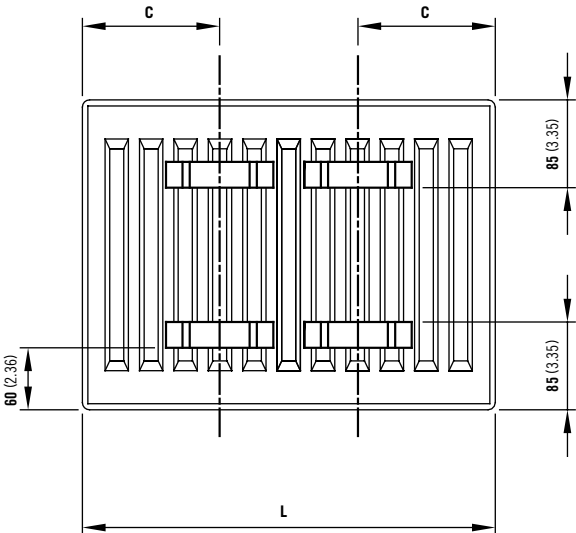

SIDE ELEVATION

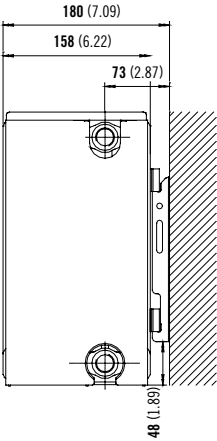

TOP ELEVATION





| L | C |
|-------------|-----|
| 400 - 1100 | 133 |
| 1200 - 2400 | 133 |

FLOORSTANDING BRACKETS

All dimensions in mm. Inches in brackets.



Floor brackets

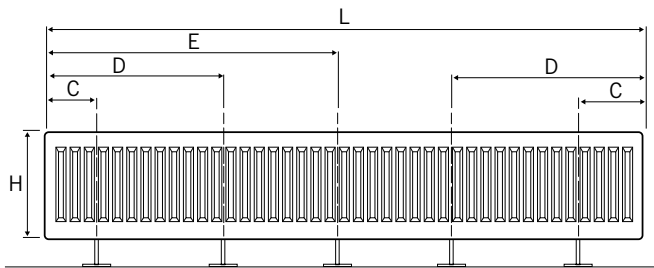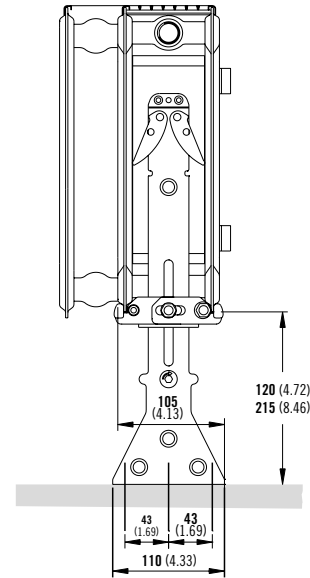

| | L | 400 | 500 - 1100 | 1200 | 1400 - 1800 | 2000 - 3000 |
|-----|----------|-----|------------------|------|-------------------|-------------------|
| H | Number | 2pc | | | | 3pc |
| 300 | C | 117 | 150 | 250 | 250 | 250 |
| 500 | E | - | - | - | - | L/2+17 |

| | L | 400 | 500 - 1100 | 1200 | 1400 - 1800 | 2000 | 2200 | 2400 | 2600 | 2800 | 3000 |
|-----|----------|-----|------------------|------|-------------------|------|------|------|--------|------|------|
| H | Number | 2pc | | | 3pc | 4pc | | | 5pc | | |
| 600 | C | 117 | 150 | 250 | 250 | 250 | | | 250 | | |
| 700 | D | - | - | - | - | 750 | 817 | 850 | 750 | 817 | 850 |
| | E | - | - | - | 817 | - | - | - | L/2+17 | | |


CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

| Type | K3 | | | |
|----------------------------|-------|-------|-------|-------|
| Height | 300 | 500 | 600 | 700 |
| W/m at 75/65/20 | 1349 | 2056 | 2389 | 2712 |
| n-coefficients | 1.31 | 1.32 | 1.32 | 1.34 |
| Heated surface area (m2/m) | 5.26 | 9.49 | 11.61 | 13.72 |
| Weight (kg/m) | 25.20 | 43.40 | 52.50 | 60.77 |
| Water contents (l/m) | 5.40 | 8.33 | 9.80 | 11.37 |
| Wall to tap centre (mm) | 73 | 73 | 73 | 73 |

PRESSURE DROPS

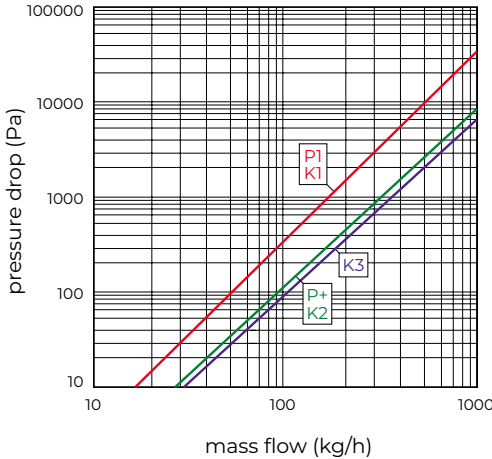

| Type | Kv |
|---------|------|
| P1 / K1 | 1.67 |
| P+ / K2 | 3.32 |
| K3 | 3.65 |