


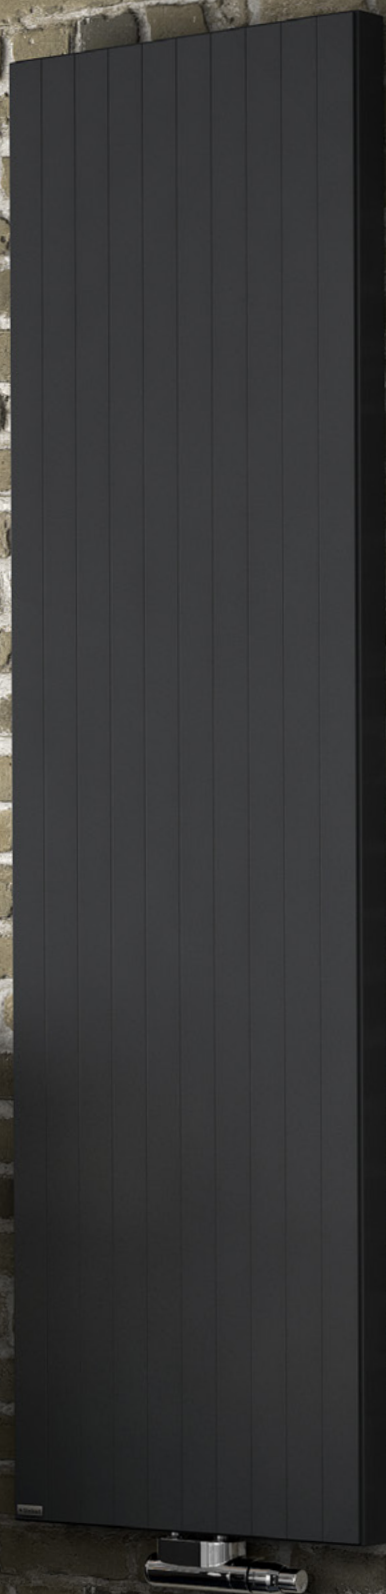


SOFTLINE DECO VERTICAL CONCEPT

Softline Series

50 Δt

(75/65/20°C)


K2



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr
1800	400	12	24182204	1476	5036
	500	15	24182205	1845	6295
	600	18	24182206	2214	7554

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


CENTRE TAP TRV	
	UIN
	Elements
	14531310 CENTRE TAP TRV STRAIGHT WHITE -10MM
	14531312 CENTRE TAP TRV STRAIGHT WHITE -1/2IN
	14531315 CENTRE TAP TRV STRAIGHT WHITE -15MM
	14531410 CENTRE TAP TRV STRAIGHT CHROME -10MM
	14531412 CENTRE TAP TRV STRAIGHT CHROME -1/2IN
	14531415 CENTRE TAP TRV STRAIGHT CHROME -15MM
	14531510 CENTRE TAP TRV ANGLED L WHITE -10MM
	14531512 CENTRE TAP TRV ANGLED L WHITE -1/2IN
	14531515 CENTRE TAP TRV ANGLED L WHITE -15MM
	14531610 CENTRE TAP TRV ANGLED L CHROME -10MM
	14531612 CENTRE TAP TRV ANGLED L CHROME -1/2IN
	14531615 CENTRE TAP TRV ANGLED L CHROME -15MM
	14531710 CENTRE TAP TRV ANGLED R WHITE -10MM
	14531712 CENTRE TAP TRV ANGLED R WHITE -1/2IN
	14531715 CENTRE TAP TRV ANGLED R WHITE -15MM
	14531810 CENTRE TAP TRV ANGLED R CHROME -10MM
	14531812 CENTRE TAP TRV ANGLED R CHROME -1/2IN
	14531815 CENTRE TAP TRV ANGLED R CHROME -15MM

SOFTLINE DECO VERTICAL CONCEPT

Softline Series


WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

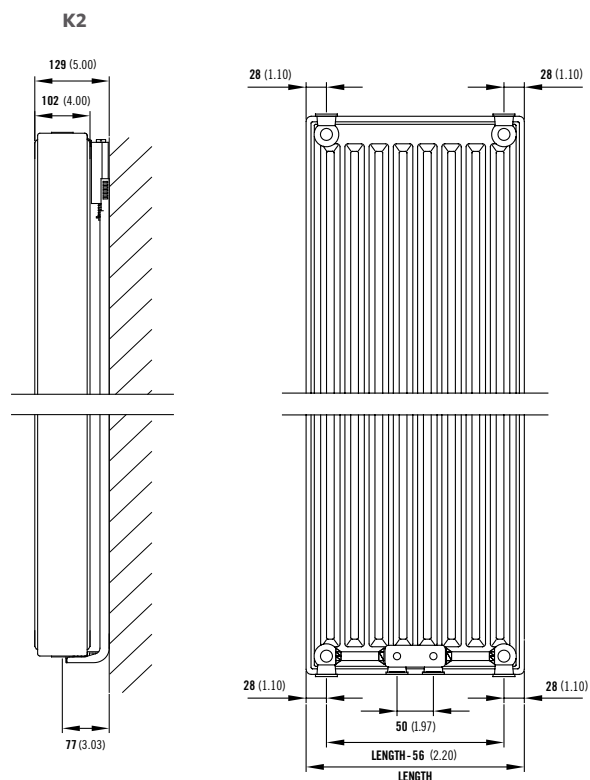

Comes complete with Stelrad's class leading safety bracket.

MOUNTING BRACKETS



Height		H2		H3		H4	
mm	inches	mm	inches	mm	inches	mm	inches
1800	70.90	70	2.75	830	43.89	1590	63.58


SOFTLINE DECO VERTICAL

Softline Series

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

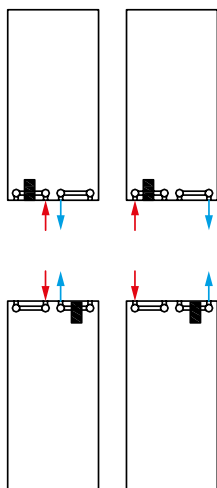

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K2
Height	1800
W/m at 75/65/20	3690
n-coefficients	1.32
Heated surface area (m²/m)	29.90
Weight (kg/m)	105.30
Water contents (l/m)	15.90
Wall to tap centre (mm)	77
K _M	20.69

PRESSURE DROPS

