

ARC & WAVE

Aqua Series

50 Δt

(75/65/20°C)

ARC

Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	380	200	147037	882	3010	£550.09	£660.11
	440	200	147038	1021	3485	£577.25	£692.70
	620	200	147039	1438	4908	£718.10	£861.72

WAVE


Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	380	200	147034	882	3010	£613.73	£736.48
	440	200	147035	1021	3485	£648.54	£778.25
	620	200	147036	1438	4908	£789.41	£947.29

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

ARC & WAVE

Aqua Series

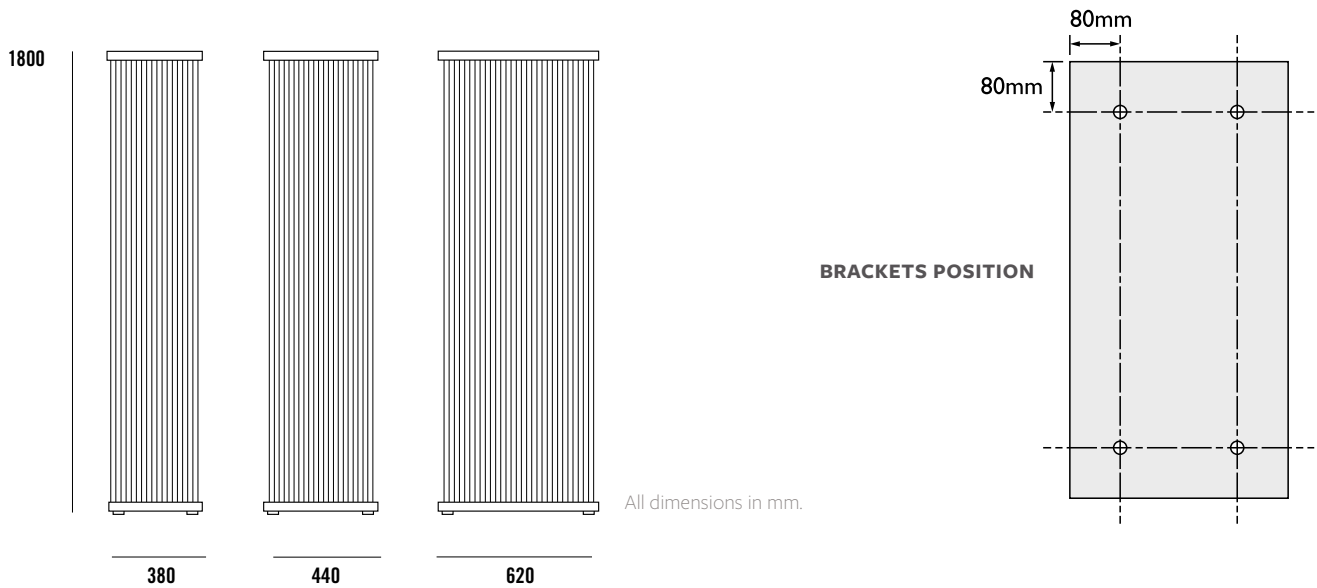

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Arc			Wave		
	1800	1800	1800	1800	1800	1800
Height	1800	1800	1800	1800	1800	1800
Length	380	440	620	380	440	620
Btu/hr	3010	3484	4908	2481	3167	3577
Watts	882	1021	1438	727	957	1048
Tapping centres (mm)	340	400	580	340	460	460
Centres from wall (mm)	42	42	42	60	60	60
Max. projection (mm)	200	200	200	120	120	120
Weight (kg/m)	10	13	14	10	13	14
Water contents (l/m)	3.05	3.52	4.97	3.05	3.52	4.97