

# CALIENTE HORIZONTAL

Designer Series

## 50 $\Delta t$

(75/65/20°C)

### SINGLE TUBE

### DOUBLE TUBE

Height mm	Length mm	Elements	SINGLE TUBE			DOUBLE TUBE		
			Stelrad UIN	Watts	Heat output Btu/hr	Stelrad UIN	Watts	Heat output Btu/hr
<b>594</b>	800	18	405911800	626	2136	405922800	968	3306
	1000	18	405911100	788	2668	405922100	1211	4132
	1200	18	405911120	938	3200	-	-	-
	1400	18	405911140	1095	3736	-	-	-

$\Delta t50$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t40$  or  $\Delta t30$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).


For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

# CALIENTE HORIZONTAL

Designer Series

## WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

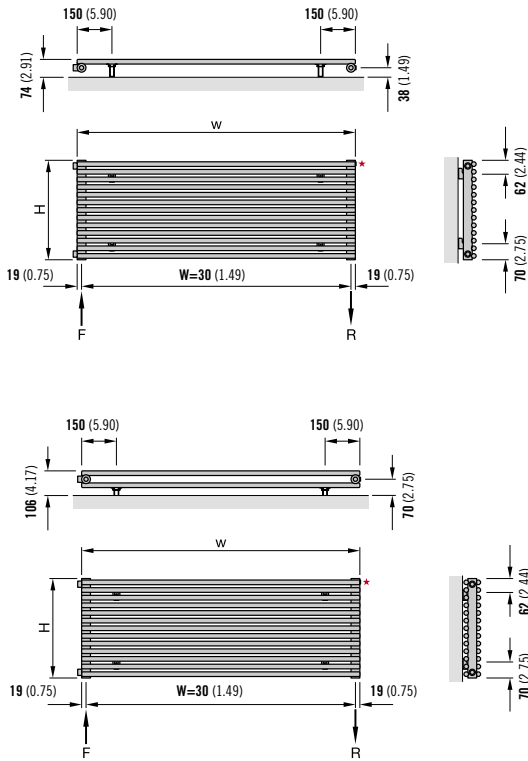

## PRODUCT SPECIFICATION

Tube diameter =  $\varnothing$ 20mm and  $\varnothing$ 38mm  
 Steel thickness = 1.25mm for  $\varnothing$ 20 ; 1.4mm for  $\varnothing$ 38  
 Working pressure = 6 bar  
 Operating temp = 110° max

★ Air vents

## CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single	Double
Height	594	594
W/m at 75/65/20	782	1210
n-coefficients	1.25	1.26
Heated surface area (m <sup>2</sup> /m)	1.13	2.26
Weight (kg/m)	12.2	22.6
Water contents (l/m)	5.49	12.47
Wall to tap centre (mm)	38	70