

### 50 $\Delta t$

(75/65/20°C)

**P+**

**K2**

| Height mm   | Emitter Length mm | Casing Length mm | Stelrad UIN | Heat output |        | Emitter Length mm | Casing Length mm | Stelrad UIN | Heat output |        |
|-------------|-------------------|------------------|-------------|-------------|--------|-------------------|------------------|-------------|-------------|--------|
|             |                   |                  |             | Watts       | Btu/hr |                   |                  |             | Watts       | Btu/hr |
| <b>1820</b> | 400               | 504              | 38418210    | 1224        | 4176   | 400               | 527              | 38418220    | 1476        | 5036   |
|             | 500               | 604              | 38518210    | 1530        | 5220   | 500               | 627              | 38518220    | 1845        | 6295   |
|             | 600               | 704              | 38618210    | 1836        | 6264   | 600               | 727              | 38618220    | 2214        | 7554   |
| <b>2020</b> | 400               | 504              | 38420210    | 1308        | 4463   | 400               | 527              | 38420220    | 1584        | 5405   |
|             | 500               | 604              | 38520210    | 1635        | 5579   | 500               | 627              | 38520220    | 1980        | 6756   |
|             | 600               | 704              | 38620210    | 1962        | 6694   | 600               | 727              | 38620220    | 2376        | 8107   |

$\Delta t50$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t40$  or  $\Delta t30$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

#### CENTRE TAP TRV NOW AVAILABLE

| Stelrad UIN | Description        | Price excl VAT | Price incl VAT |
|-------------|--------------------|----------------|----------------|
| 145313      | Straight White     | £50.00         | £60.00         |
| 145314      | Straight Chrome    | £50.00         | £60.00         |
| 145315      | Angled Left White  | £50.00         | £60.00         |
| 145316      | Angled Left Chrome | £50.00         | £60.00         |




# SWING

## Designer Series


### WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

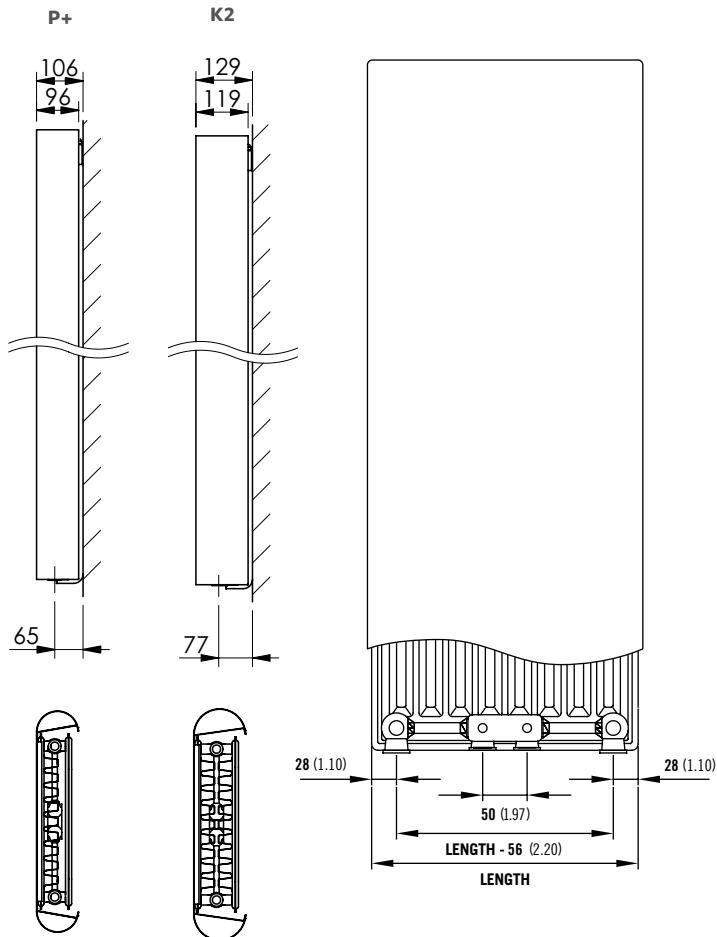


Comes complete with Stelrad's class leading safety bracket.

### TAPPING CENTRES



| L - P+<br>mm | L - K2<br>mm | L <sub>H</sub><br>mm |
|--------------|--------------|----------------------|
| 504          | 527          | 344                  |
| 604          | 627          | 444                  |
| 704          | 727          | 70                   |


### MOUNTING BRACKETS

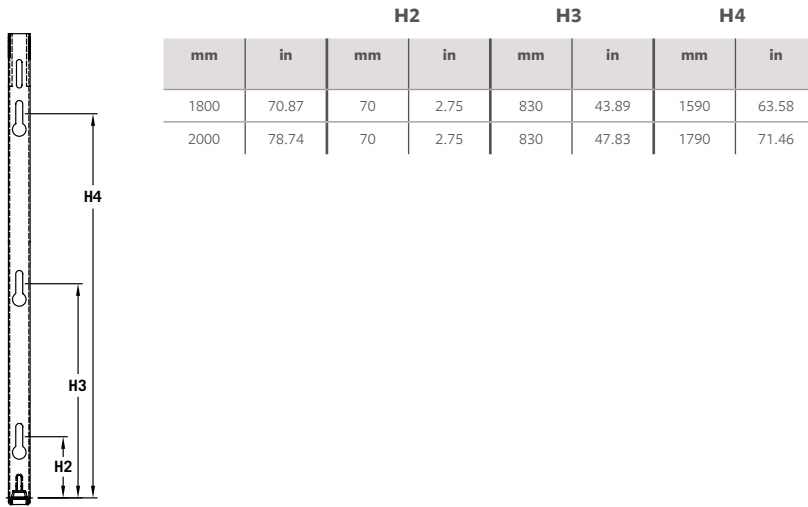

### CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


### PIPING OPTIONS

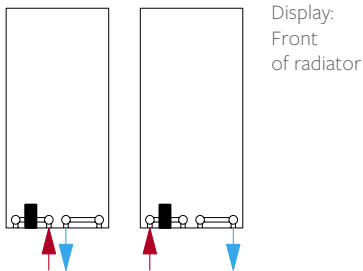

### EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

| Type                                    | P+    |        | K2     |        |
|---|-------|--------|--------|--------|
| Height                                  | 1820  | 2020   | 1820   | 2020   |
| W/m at 75/65/20                         | 3060  | 3270   | 3690   | 3960   |
| n-coefficients                          | 1.30  | 1.30   | 1.33   | 1.33   |
| Heated surface area (m <sup>2</sup> /m) | 13.58 | 16.20  | 29.90  | 37.74  |
| Weight (kg/m)                           | 96.00 | 106.20 | 105.30 | 116.40 |
| Water contents (l/m)                    | 15.90 | 17.70  | 15.90  | 17.70  |
| Wall to tap centre (mm)                 | 65    | 65     | 77     | 77     |



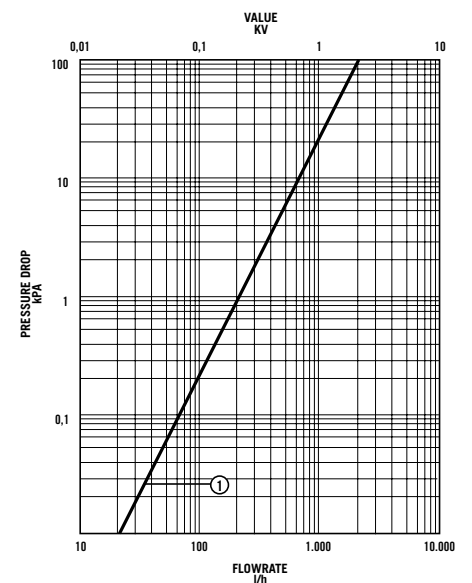











### PRESSURE DROPS



① Type P+ & K2

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

## Natural Colours

|   |   |   |   |  |   |   |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| NT110<br>Papyrus white  | NT120<br>Pearl white  | NT130<br>Champagne  | NT140<br>Beige  | NT150<br>Beige grey  | NT160<br>Pebble grey  | NT170<br>Quartz grey  |
|  |  |  |  |  |  |  |
| SN110<br>Cream white  | SN120<br>Cream  | SN130<br>Mocca  | SN140<br>Bordeaux   | SN150<br>Sepia   | SN160<br>Pale blue  | SN170<br>Black  |

## Metallic Colours

|  |  |  |  |   |  |  |
|--|--|--|--|---|--|--|
|  |  |  |  |  |  |  |
| ML110<br>Dove grey   | ML120<br>Titanium grey   | ML130<br>Blue grey   | ML140<br>Granite   | ML150<br>Cappuccino   | ML160<br>Terra brown   | ML170<br>Graphite black  |

## RAL Colours

|   |   |   |   |  |   |   |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| A1004<br>Golden yellow  | A2003<br>Pastel orange  | A3002<br>Carmine red  | A3003<br>Robin red  | A5002<br>Ultramarine blue  | A6018<br>Yellow green   | A7001<br>Silver grey  |
|  |  |  |  |  |  |  |
| A7011<br>Iron grey  | A7016<br>Anthracite grey  | A7030<br>Stone grey   | A7035<br>Light grey   | A8017<br>Chocolate brown   | A9003<br>Signal white   | A9005<br>Jet black  |
|  |   |   |   |  |   |   |
| RAL 9016*<br>Traffic white  |   |   |   |  |   |   |

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT [WWW.RALCOLOR.COM](http://WWW.RALCOLOR.COM)

 RAL 9016\*  
Traffic white  
comes as  
standard on  
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email [marketing@stelrad.com](mailto:marketing@stelrad.com)