



50 Δt
(75/65/20°C)

SINGLE ROW



Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	320	60	147250	742	2532	£318.41	£382.09
	440	60	147285	1021	3485	£362.68	£435.22
	620	60	147320	1438	4908	£469.52	£563.42
2000	500	60	147355	1275	4352	£418.69	£502.43
	620	60	147390	1580	5393	£508.42	£610.10
	740	60	147425	1886	6437	£599.03	£718.84


DOUBLE OFFSET ROW





Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	320	60	147460	818	2792	£401.04	£481.25
	440	60	147495	1130	3857	£478.43	£574.12
	620	60	147530	1597	5451	£641.64	£769.97
2000	500	60	147565	1415	4829	£573.33	£688.00
	620	60	147600	1758	6000	£697.11	£836.53

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

VISTALINE 2 SINGLE ROW




VISTALINE 3 DOUBLE OFFSET ROW

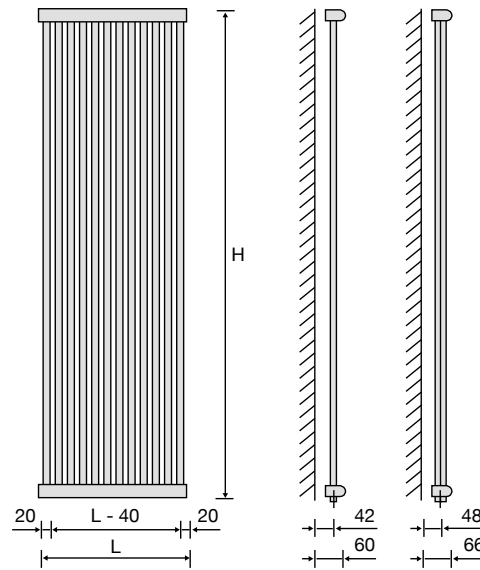

All dimensions in mm.


BRACKETS POSITION



TAPPING CENTRE FOR THE VISTALINE


L - 40mm perpendicular to the manifold

H - 22mm (+2mm) In line with the manifold * coupling protrudes 10mm



STANDARD FITTING

EG $\phi 1/2''$



CONNECTIONS

Each radiator comes with $1/2''$ inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single Row						Double Offset Row				
	1800	1800	1800	2000	2000	2000	1800	1800	1800	2000	2000
Height	1800	1800	1800	2000	2000	2000	1800	1800	1800	2000	2000
Length	320	440	620	500	620	740	320	440	620	500	620
Btu/hr	2532	3484	4908	4351	5392	6437	2792	3856	5450	4829	6000
Watts	742	1021	1438	1275	1580	1886	818	1130	1597	1415	1758
Tapping centres (mm)	280	280	580	460	580	700	280	400	580	460	580
Centres from wall (mm)	42	42	42	42	42	42	48	48	48	48	48
Max. projection (mm)	60	60	60	60	60	60	66	66	66	66	66
Weight (kg/m)	8	11	16	14	17	17	10	14	20	18	22
Water contents (l/m)	2.57	3.52	4.97	4.41	5.46	6.52	3.22	4.42	6.23	5.54	6.86

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

RAL COLOURS

						
RAL 7035 Pale grey	RAL 7038 Agate grey	RAL 7036 Platinum grey	RAL 7030 Stone grey	RAL 7037 Dusty grey	RAL 7015 Slate grey	RAL 9005* Jet black
						
RAL 8017 Chocolate brown	RAL 1016 Sulphur yellow	RAL 1021 Cadmium yellow	RAL 1004 Dark Golden yellow	RAL 2008 Light red orange	RAL 3000 Flame red	RAL 3003 Ruby red
						
RAL 3005 Wine red	RAL 6027 Light green	RAL 6034 Pastel turquoise	RAL 6019 Pastel green	RAL 6033 Turquoise blue	RAL 6020 Chrome green	RAL 6005 Light moss green
						
RAL 5014 Pigeon blue	RAL 5002 Ultramarine blue	RAL 5024 Pastel blue	RAL 5022 Night blue	RAL 5010 Gentian blue	RAL 9016** Traffic white	RAL 9010† Pure white
						
RAL 9001 Cream	RAL 1013 Pearl white	RAL 1015 Light ivory	RAL 9002 Grey white			

Metallic Colours

		
2765G Metallic silver	BR 0004 Gilded aluminium	BR 0007*** Satin metal grey

Where indicated products are only available in this colour: *Excel **Standard white ***Arc, Wave, Optia.
Where indicated products come as standard in RAL 9010 Pure White: †Esprit, Vistaline & Ellipse.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM



Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com