

# PLANAR VERTICAL

## Designer Series

**50  $\Delta t$**

(75/65/20°C)

**K2**




Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/hr
<b>1800</b>	400	12	30182204	1476	5036
	500	15	30182205	1845	6295
	600	18	30182206	2214	7554
	700	21	30182207	2583	8813
<b>2000</b>	400	12	30202204	1584	5405
	500	15	30202205	1980	6756
	600	18	30202206	2376	8107
	700	21	30202207	2772	9458
<b>2200</b>	400	12	30222204	1692	5773
	500	15	30222205	2115	7216
	600	18	30222206	2538	8660
	700	21	30222207	2961	10103

$\Delta t$ 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t$ 40 or  $\Delta t$ 30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

### CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00




# PLANAR VERTICAL

## Designer Series


### WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

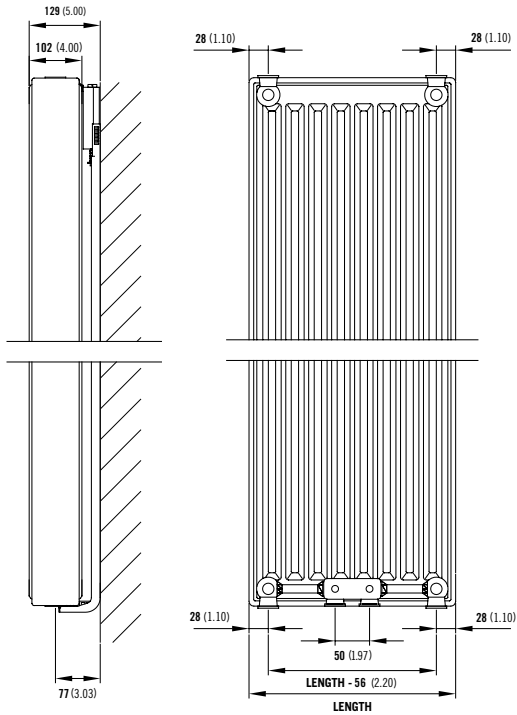

Comes complete with Stelrad's class leading safety bracket.

### MOUNTING BRACKETS



Height	H2		H3		H4	
	mm	in	mm	in	mm	in
1800	70.87	2.75	830	43.89	1590	63.58
2000	78.74	2.75	930	47.83	1790	71.46
2200	86.61	2.75	1030	51.77	1990	79.33


### CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

# PLANAR VERTICAL

Designer Series


## PIPING OPTIONS

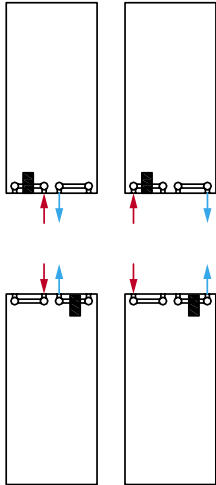

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K2		
Height	1800	2000	2200
W/m at 75/65/20	3690	3960	4230
n-coefficients	1.32	1.33	1.33
Heated surface area (m <sup>2</sup> /m)	29.90	37.74	38.66
Weight (kg/m)	105.30	116.40	126.60
Water contents (l/m)	15.90	17.70	20.10
Wall to tap centre (mm)	77	77	77



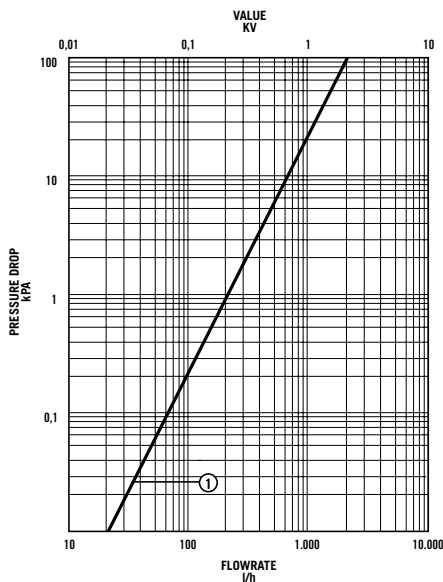











## PRESSURE DROPS



① Type K2

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

## Natural Colours

						
NT110 Papyrus white	NT120 Pearl white	NT130 Champagne	NT140 Beige	NT150 Beige grey	NT160 Pebble grey	NT170 Quartz grey
						
SN110 Cream white	SN120 Cream	SN130 Mocca	SN140 Bordeaux	SN150 Sepia	SN160 Pale blue	SN170 Black

## Metallic Colours

						
ML110 Dove grey	ML120 Titanium grey	ML130 Blue grey	ML140 Granite	ML150 Cappuccino	ML160 Terra brown	ML170 Graphite black

## RAL Colours

						
A1004 Golden yellow	A2003 Pastel orange	A3002 Carmine red	A3003 Robin red	A5002 Ultramarine blue	A6018 Yellow green	A7001 Silver grey
						
A7011 Iron grey	A7016 Anthracite grey	A7030 Stone grey	A7035 Light grey	A8017 Chocolate brown	A9003 Signal white	A9005 Jet black
						
RAL 9016* Traffic white						

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT [WWW.RALCOLOR.COM](http://WWW.RALCOLOR.COM)

 RAL 9016\*  
Traffic white  
comes as  
standard on  
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email [marketing@stelrad.com](mailto:marketing@stelrad.com)