



50 Δt
(75/65/20°C)




Height mm	Length mm	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
			Watts	Btu/hr				Watts	Btu/hr		
300	500	84301105	235	802	£48.86	£58.63	84302205	449	1532	£72.85	£87.42
	1000	84301110	470	1604	£79.75	£95.70	84302210	898	3064	£126.76	£152.11
	1500	84301115	705	2405	£113.43	£136.12	84302215	1347	4596	£194.74	£233.69
450	400	84451104	272	928	£49.91	£59.89	84452204	509	1737	£79.28	£95.14
	600	84451106	409	1396	£58.21	£69.85	84452206	764	2607	£101.92	£122.30
	800	84451108	545	1860	£77.60	£93.12	84452208	1018	3473	£117.76	£141.31
	1000	84451110	681	2324	£96.99	£116.39	84452210	1273	4343	£135.89	£163.07
	1200	84451112	817	2788	£116.40	£139.68	84452212	1528	5214	£163.07	£195.68
	1400	84451114	953	3252	£135.81	£162.97	84452214	1782	6080	£210.06	£252.07
	1600	84451116	1090	3719	£155.22	£186.26	84452216	2037	6950	£240.05	£288.06
	1800	84451118	1226	4183	£189.57	£227.48	84452218	2291	7817	£270.09	£324.11
600	400	84601104	348	1187	£54.41	£65.29	84602204	640	2184	£86.49	£103.79
	600	84601106	522	1781	£63.50	£76.20	84602206	961	3279	£111.17	£133.40
	800	84601108	696	2375	£84.66	£101.59	84602208	1281	4371	£128.49	£154.19
	1000	84601110	870	2968	£105.82	£126.98	84602210	1601	5463	£148.27	£177.92
	1200	84601112	1044	3562	£126.98	£152.38	84602212	1921	6554	£177.88	£213.46
	1400	84601114	1218	4156	£148.16	£177.79	84602214	2241	7646	£229.17	£275.00
	1600	84601116	1392	4750	£169.32	£203.18	84602216	2562	8742	£261.88	£314.26
	1800	84601118	1566	5343	£206.79	£248.15	84602218	2882	9833	£294.62	£353.54
	2000	84601120	1740	5937	£212.13	£254.56	84602220	3202	10925	£450.91	£541.09

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

SOFTLINE DECO

Softline Series

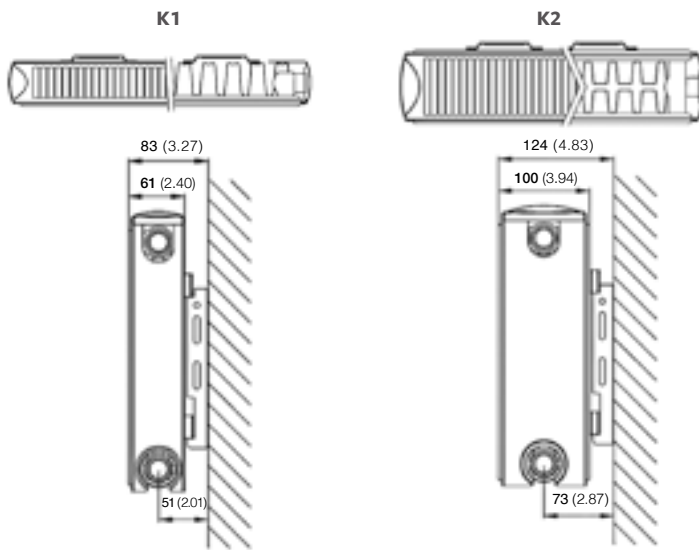

K1 & K2 LUG POSITIONS (New as of June 2016).
All dimensions in mm. Inches in brackets.

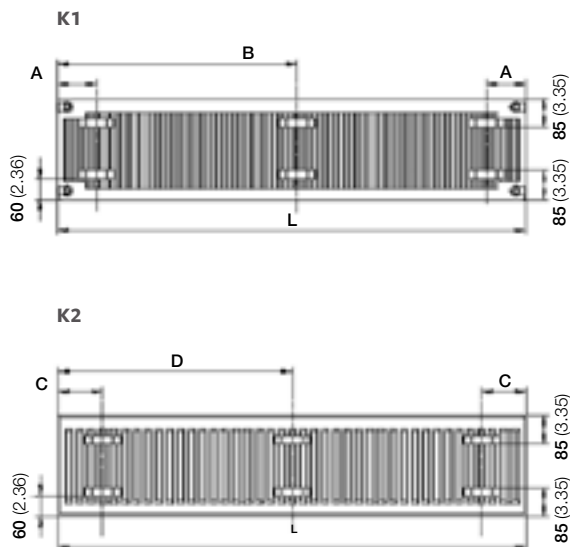

L	K1				K2			
	A		B		C		D	
	mm	in	mm	in	mm	in	mm	in
400	117	4.60	-	-	133	5.24	-	-
500 - 1100	150	5.90	-	-	133	5.24	-	-
1200 - 1600	150	5.90	-	-	133	5.24	-	-
1800 - 2000	150	5.90	(L/2) + 17		133	5.24	L/2	


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

SOFTLINE DECO

Softline Series

PIPING OPTIONS

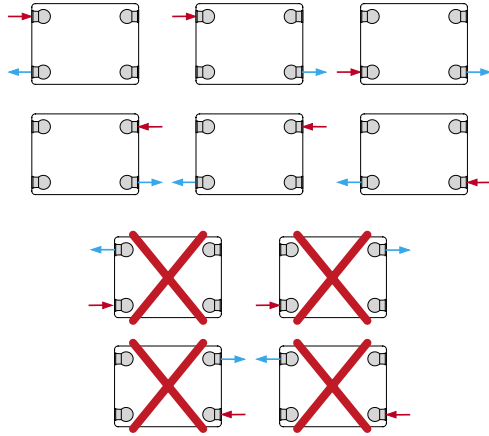

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1			K2		
	300	450	600	300	450	600
Height	300	450	600	300	450	600
W/m at 75/65/20	470	681	870	898	1273	1601
n-coefficients	1.26	1.27	1.28	1.30	1.30	1.31
Heated surface area (m ² /m)	2.09	3.37	4.66	3.51	5.62	7.74
Weight (kg/m)	14.13	18.22	24.27	19.30	28.85	38.40
Water contents (l/m)	1.81	2.53	3.23	3.10	4.65	6.20
Wall to tap Centre (mm)	51	51	51	73	73	73

PRESSURE DROPS

