







LEADING THE WAY

Stelrad has been manufacturing high quality, steel radiators since 1936, so it's safe to say we know a thing or two about heating.

Since our beginnings, we've grown into the UK's number one radiator brand, manufacturing and distributing over 2.5 million radiators and products every year. With an expert research facility in Belgium, we're dedicated to continually developing innovative products and widening our extensive range to enable you to offer your customers the largest selection of technicallyadvanced radiator styles and sizes in the UK.

THINGS TO CONSIDER

PRODUCT RANGES

Discover our range of designer radiators, expertly designed and styled to suit every taste and interior. You can choose from a range of shapes, sizes, colours and finishes.



FITTING

Plumbers and installers are at the heart of everything we do. Our definitive range of products offer a solution for every project and requirement. View our helpful range of downloadable installation documents and videos at Stelrad.com

QUOTE SERVICE

Our nationwide Specification and Quotes Teams are on hand to discuss your requirements for your project. Contact our expert Quotes Team for a personalised quote on 01709 572267 or email stelrad.quotes@stelrad.com

ORDERING If you would like to order a product, please visit Stelrad.com to find your nearest stocking branch.

Innovation, development and customer service are at the heart of everything we do, and we offer ranges of radiators to suit your every need. Safety, designer style, kitchens, bathrooms - a huge choice, many available in 36 colours to match your taste and decor.

Ordering is easy, and you can download simple fitting instructions and guides from our website. So when you're thinking about radiators, there's just one name to consider... Stelrad.









SOFTLINE SERIES

THE SOFTLINE SERIES IS NOW BIGGER AND BETTER THAN EVER BEFORE.

CURVED COLLECTION

Compact and with a beautifully curved top grille and end panels, the designer looks of the Softline range give you extra choice and flexibility for domestic and commercial applications.

SOFTLINE SERIES


	Softline Compact	8	
	Softline Silhouette	10	
	Softline Deco	12	
	Softline Deco Concept	14	
	Softline Plan	16	
	Softline Plan Concept	18	
	Softline Column Horizontal	20	
	Softline Column Concept	22	
	Softline Column Vertical	24	
NEW	Softline Column Vertical Concept	26	
	Softline Compact Vertical	28	
	Softline Deco Vertical	30	
NEW	Softline Deco Vertical Concept	32	
	Softline Plan Vertical	34	
NEW	Softline Plan Vertical Concept	26	

Softline Compact K338Softline Concord Plane40Softline Concord Vertical42NEWSoftline Concord Vertical Concept44Softline Concord Slimline46NEWSoftline Concord Slimline Concept48Additional information
and accessories50-55



WHY NOT UPGRADE?

All our Softline Series premium panel radiators have the same lugs and brackets plus all the same easy installation features that make them the UKs No.1 choice.

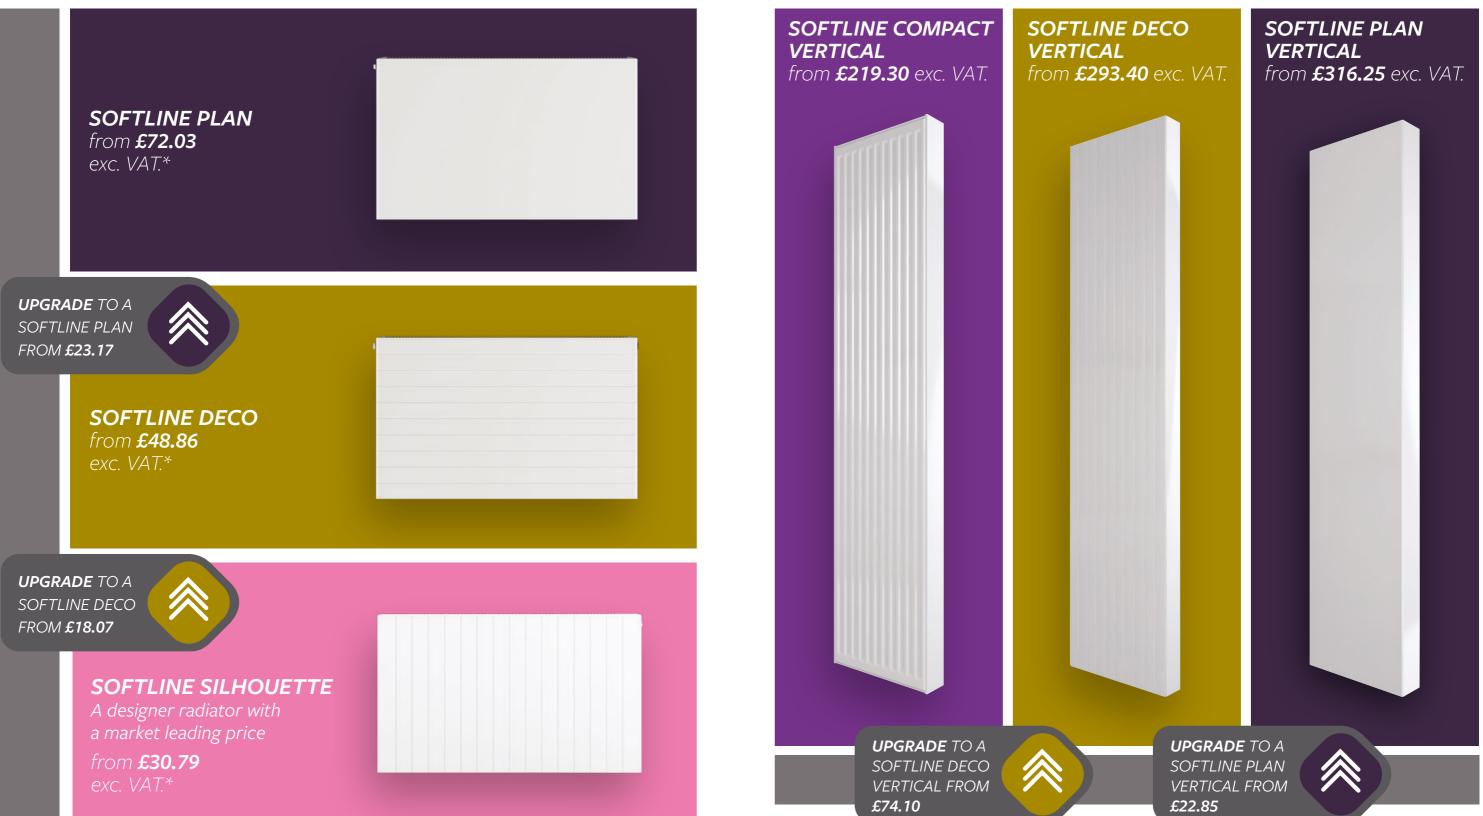





SOFTLINE COMPACT

50 ∆t (75/65/20°C)		C		к1			Q		P+			(К2		
Height mm	Length mm	Stelrad UIN	Heat Watts	output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat Watts	output Btu/hr	Price excl VAT	Price incl VAT
	500	80301105	255	870	£39.54	£47.45	-	-	-	-	-	80302205	491	1676	£57.44	£68.93
300	1000	80301110	509	1737	£70.58	£84.70	-	-	-	-	-	80302210	982	3352	£103.31	£123.97
300	1500	80301115	764	2608	£106.02	£127.22	-	-	-	-	-	80302215	1473	5027	£155.05	£186.06
	2000	80301120	1018	3474	£136.31	£163.57	-	-	-	-	-	80302220	1964	6703	£206.82	£248.18
	400	80451104	302	1031	£38.49	£46.19	-	-	-	-	-	80452204	548	1870	£52.90	£63.48
	500	80451105	378	1290	£42.89	£51.47	-	-	-	-	-	80452205	686	2341	£64.15	£76.98
	600	80451106	454	1550	£48.36	£58.03	-	-	-	-	-	80452206	823	2809	£76.00	£91.20
	700	80451107	529	1805	£53.32	£63.98	-	-	-	-	-	80452207	960	3276	£88.10	£105.72
	800	80451108	605	2065	£57.56	£69.07	-	-	-	-	-	80452208	1097	3744	£99.35	£119.22
450	900	80451109	680	2321	£62.82	£75.38	-	-	-	-	-	80452209	1234	4212	£111.78	£134.14
450	1000	80451110	756	2580	£69.84	£83.81	80452110	1055	3601	£101.81	£122.17	80452210	1371	4679	£124.27	£149.12
	1100	80451111	832	2840	£76.89	£92.27	80452111	1161	3962	£112.01	£134.41	80452211	1508	5147	£136.73	£164.08
	1200	80451112	907	3096	£83.87	£100.64	80452112	1266	4321	£122.20	£146.64	80452212	1645	5614	£149.15	£178.98
	1400	80451114	1058	3611	£97.92	£117.50	80452114	1477	5041	£142.57	£171.08	80452214	1919	6550	£174.08	£208.90
	1600	80451116	1210	4130	£111.96	£134.35	80452116	1688	5761	£162.96	£195.55	80452216	2194	7488	£199.05	£238.86
	1800	80451118	1361	4645	£126.01	£151.21	-	-	-	-	-	80452218	2468	8423	£223.97	£268.76
	2000	80451120	1512	5160	£140.04	£168.05	-	-	-	-	-	80452220	2742	9358	£248.85	£298.62
	400	80601104	392	1338	£44.37	£53.24	80602104	538	1836	£59.68	£71.62	80602204	693	2365	£65.78	£78.94
	500	80601105	490	1672	£50.84	£61.01	80602105	673	2297	£71.38	£85.66	80602205	866	2956	£79.75	£95.70
	600	80601106	588	2007	£56.97	£68.36	80602106	807	2754	£82.05	£98.46	80602206	1039	3546	£94.55	£113.46
	700	80601107	686	2341	£64.28	£77.14	80602107	942	3215	£93.09	£111.71	80602207	1212	4137	£109.63	£131.56
	800	80601108	784	2676	£71.43	£85.72	80602108	1076	3672	£106.83	£128.20	80602208	1386	4730	£124.56	£149.47
000	900	80601109	882	3010	£80.80	£96.96	80602109	1211	4133	£120.39	£144.47	80602209	1559	5321	£139.24	£167.09
600	1000	80601110	980	3345	£90.20	£108.24	80602110	1345	4590	£133.93	£160.72	80602210	1732	5911	£156.83	£188.20
	1100	80601111	1078	3679	£99.62	£119.54	80602111	1480	5051	£145.95	£175.14	80602211	1905	6502	£170.28	£204.34
	1200	80601112	1176	4014	£109.02	£130.82	80602112	1614	5509	£161.09	£193.31	80602212	2078	7092	£189.14	£226.97
	1400	80601114	1372	4683	£129.13	£154.96	80602114	1883	6427	£185.81	£222.97	80602214	2425	8277	£221.57	£265.88
	1600	80601116	1568	5352	£141.78	£170.14	80602116	2152	7345	£212.41	£254.89	80602216	2771	9457	£247.95	£297.54
	1800	80601118	1764	6021	£159.55	£191.46	-	-	-	-	-	80602218	3118	10642	£279.01	£334.81
	2000	80601120	1960	6689	£177.35	£212.82	-	-	-	-	-	80602220	3464	11823	£307.79	£369.35
	400	80701104	447	1526	£53.59	£64.31	-	-	-	-	-	80702204	784	2676	£75.69	£90.83
	500 600	80701105	559	1908	£60.28	£72.34	-	-	-	-	-	80702205	981	3348 4017	£91.85	£110.22
	700	80701106 80701107	670 782	2287 2669	£67.65 £75.71	£81.18 £90.85	-	-	-			80702206 80702207	1177 1373	4686	£108.91 £126.34	£130.69 £151.61
	800	80701108	894	3051	£83.06	£99.67	_				_	80702208	1569	5355	£142.55	£171.06
	900	80701109	1005	3430	£93.44	£112.13				-	_	80702209	1765	6024	£160.45	£192.54
700	1000	80701110	1117	3812	£103.92	£124.70					_	80702209	1961	6693	£178.33	£214.00
/00	1100	80701111	1229	4195	£103.92	£124.70	-		-	-		80702210	2157	7362	£178.55	£214.00
	1200	80701112	1340	4573	£124.78	£149.74	_					80702211	2353	8031	£214.10	£256.92
	1400	80701114	1564	5338	£145.67	£174.80	_	-			-	80702212	2745	9369	£249.87	£299.84
	1600	80701116	1787	6099	£166.52	£199.82	_		-			80702214	3138	10710	£285.70	£342.84
	1800	80701118	2011	6864	£187.47	£224.96						80702218	3530	12048	£321.47	£385.76
	2000	80701120	2234	7625	£208.30	£249.96	_					80702220	3922	13386	£357.24	£428.69
	2000	00/01120	2234	, 323		JZ-17.70			-		-	30,02220	J722	10000		

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





SOFTLINE SILHOUETTE

50∆t (75/65/20°C)

0 ∆t /65/20°C)				К1								
Height mm	Length mm	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat (Watts	output Btu/hr	Price excl VAT	Price incl VAT	
	500	88301105	235	802	£30.79	£36.95	88302205	449	1532	£45.91	£55.09	
300	1000	88301110	470	1604	£50.25	£60.30	88302210	898	3064	£79.88	£95.86	
	1500	88301115	705	2405	£71.48	£85.78	88302215	1347	4596	£122.72	£147.26	
	400	88451104	272	928	£33.28	£39.94	88452204	509	1737	£49.96	£59.95	
	600	88451106	409	1396	£38.48	£46.18	88452206	764	2607	£64.23	£77.08	
	800	88451108	545	1860	£48.90	£58.68	88452208	1018	3473	£74.20	£89.04	
450	1000	88451110	681	2324	£61.12	£73.34	88452210	1273	4343	£85.63	£102.76	
400	1200	88451112	817	2788	£73.35	£88.02	88452212	1528	5214	£102.76	£123.31	
	1400	88451114	953	3252	£85.59	£102.71	88452214	1782	6080	£132.37	£158.84	
	1600	88451116	1090	3719	£97.81	£117.37	88452216	2037	6950	£151.28	£181.54	
	1800	88451118	1226	4183	£119.46	£143.35	88452218	2291	7817	£170.21	£204.25	
	400	88601104	348	1187	£35.36	£42.43	88602204	640	2184	£54.50	£65.40	
	600	88601106	522	1781	£42.64	£51.17	88602206	961	3279	£70.05	£84.06	
	800	88601108	696	2375	£53.34	£64.01	88602208	1281	4371	£80.97	£97.16	
	1000	88601110	870	2968	£66.68	£80.02	88602210	1601	5463	£93.43	£112.12	
600	1200	88601112	1044	3562	£80.02	£96.02	88602212	1921	6554	£112.09	£134.51	
	1400	88601114	1218	4156	£93.36	£112.03	88602214	2241	7646	£144.42	£173.30	
	1600	88601116	1392	4750	£106.70	£128.04	88602216	2562	8742	£165.04	£198.05	
	1800	88601118	1566	5343	£130.31	£156.37	88602218	2882	9833	£185.66	£222.79	
	2000	88601120	1740	5937	£133.67	£160.40	88602220	3202	10925	£284.16	£340.99	

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com). For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


UPGRADE TO A £18.07 SOFTLINE DECO FROM

*based on a 300 x 500 K1



Stelrad[®] Softline Series



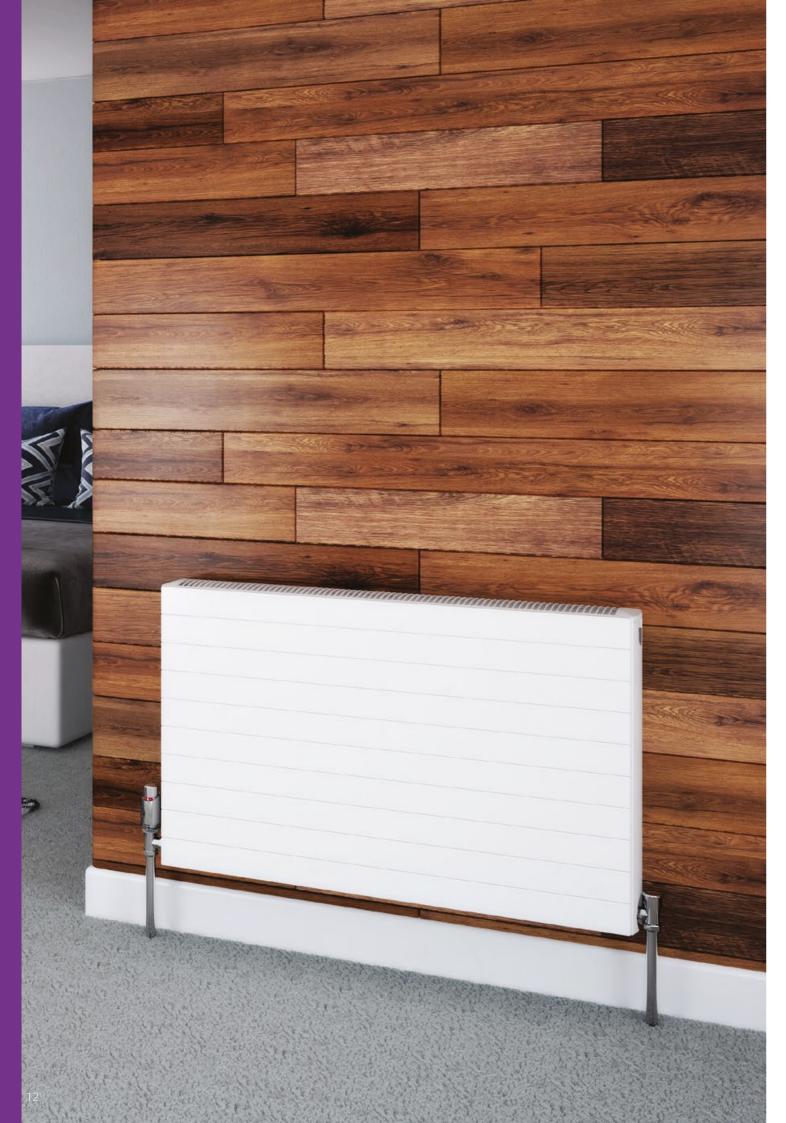

SOFTLINE DECO

50∆t (75/65/20°C)

K1	
	(MAR)

/ 5/05/20 C)			V mm	<u></u>				Zuuu	uuuuuuya v	UU O	
Height mm	Length mm	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
	500	84301105	235	802	£48.86	£58.63	84302205	449	1532	£72.85	£87.42
300	1000	84301110	470	1604	£79.75	£95.70	84302210	898	3064	£126.76	£152.11
000	1500	84301115	705	2405	£113.43	£136.12	84302215	1347	4596	£194.74	£233.69
	400	84451104	272	928	£49.91	£59.89	84452204	509	1737	£79.28	£95.14
	600	84451106	409	1396	£58.21	£69.85	84452206	764	2607	£101.92	£122.30
	800	84451108	545	1860	£77.60	£93.12	84452208	1018	3473	£117.76	£141.31
460	1000	84451110	681	2324	£96.99	£116.39	84452210	1273	4343	£135.89	£163.07
450	1200	84451112	817	2788	£116.40	£139.68	84452212	1528	5214	£163.07	£195.68
	1400	84451114	953	3252	£135.81	£162.97	84452214	1782	6080	£210.06	£252.07
	1600	84451116	1090	3719	£155.22	£186.26	84452216	2037	6950	£240.05	£288.06
	1800	84451118	1226	4183	£189.57	£227.48	84452218	2291	7817	£270.09	£324.11
	400	84601104	348	1187	£54.41	£65.29	84602204	640	2184	£86.49	£103.79
	600	84601106	522	1781	£63.50	£76.20	84602206	961	3279	£111.17	£133.40
	800	84601108	696	2375	£84.66	£101.59	84602208	1281	4371	£128.49	£154.19
	1000	84601110	870	2968	£105.82	£126.98	84602210	1601	5463	£148.27	£177.92
600	1200	84601112	1044	3562	£126.98	£152.38	84602212	1921	6554	£177.88	£213.46
	1400	84601114	1218	4156	£148.16	£177.79	84602214	2241	7646	£229.17	£275.00
	1600	84601116	1392	4750	£169.32	£203.18	84602216	2562	8742	£261.88	£314.26
	1800	84601118	1566	5343	£206.79	£248.15	84602218	2882	9833	£294.62	£353.54
	2000	84601120	1740	5937	£212.13	£254.56	84602220	3202	10925	£450.91	£541.09

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com). For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



*based on a 300 x 500 K1



Stelrad[®] Softline Series

К2

A REAL PROPERTY OF THE PROPERT





SOFTLINE DECO CONCEPT

50 A t (75/65/20°C)			115)		K2						
Height mm	Length mm	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
	400	24601104	348	1187	£131.07	£157.28	24602204	640	2184	£163.14	£195.77
	600	24601106	522	1781	£140.16	£168.19	24602206	961	3279	£187.82	£225.38
600	800	24601108	696	2375	£161.31	£193.57	24602208	1281	4371	£205.15	£246.18
000	1000	24601110	870	2968	£182.48	£218.98	24602210	1601	5463	£224.93	£269.92
	1200	24601112	1044	3562	£203.64	£244.37	24602212	1921	6554	£254.54	£305.45
	1400	24601114	1218	4156	£224.82	£269.78	24602214	2241	7646	£305.83	£367.00


 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads. SOFTLINE DECO CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.



Stelrad[®] Softline Series



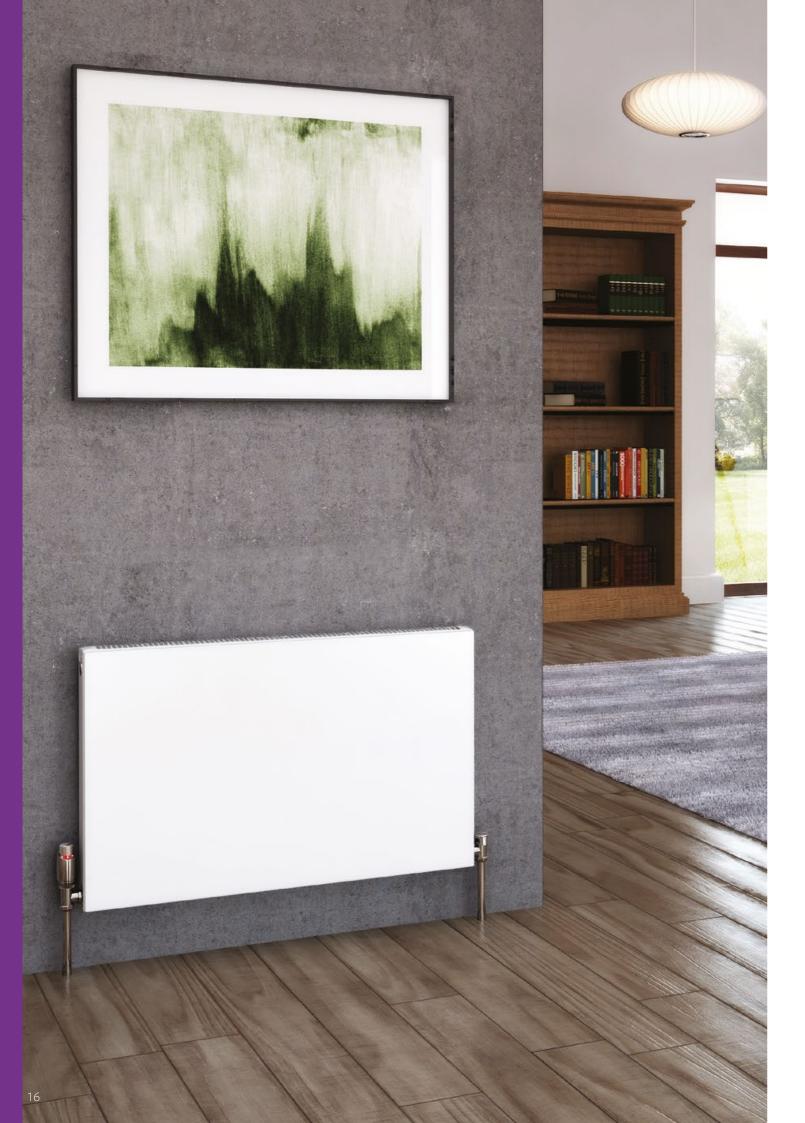

SOFTLINE PLAN

50 Δt K1 (75/65/20°C) Height mm Heat output Watts Btu/hr Price excl VAT Length mm Stelrad UIN £72.03 £117.52 £167.15 £73.52 £85.79 £114.38 £142.95 £171.54 £200.16 £228.74 £279.39 £80.18 £93.59 £124.76 £155.94 £187.13 £218.35 £249.54 £304.77 £312.61

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



Stelrad' Softline Series

K2

Price incl VAT	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
£86.44	85302205	465	1587	£107.36	£128.83
£141.02	85302210	929	3170	£186.80	£224.16
£200.58	85302215	1394	4756	£286.99	£344.39
£88.22	85452204	518	1767	£116.82	£140.18
£102.95	85452206	778	2655	£150.20	£180.24
£137.26	85452208	1037	3538	£173.54	£208.25
£171.54	85452210	1296	4422	£200.26	£240.31
£205.85	85452212	1555	5306	£240.32	£288.38
£240.19	85452214	1814	6189	£309.56	£371.47
£274.49	85452216	2074	7076	£353.78	£424.54
£335.27	85452218	2333	7960	£398.03	£477.64
£96.22	85602204	654	2231	£127.45	£152.94
£112.31	85602206	980	3344	£163.82	£196.58
£149.71	85602208	1307	4459	£189.34	£227.21
£187.13	85602210	1634	5575	£218.47	£262.16
£224.56	85602212	1961	6691	£262.15	£314.58
£262.02	85602214	2288	7807	£337.75	£405.30
£299.45	85602216	2614	8919	£385.96	£463.15
£365.72	85602218	2941	10035	£434.19	£521.03
£375.13	85602220	3268	11150	£664.51	£797.41



SOFTLINE PLAN CONCEPT

50 A t (75/65/20°C)								K2					
Height mm	Length mm	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT		
	400	25601104	364	1242	£156.84	£188.21	25602204	654	2231	£204.11	£244.93		
	600	25601106	547	1866	£170.25	£204.30	25602206	980	3344	£240.48	£288.58		
600	800	25601108	729	2487	£201.42	£241.70	25602208	1307	4459	£266.00	£319.20		
000	1000	25601110	911	3108	£232.60	£279.12	25602210	1634	5575	£295.13	£354.16		
	1200	25601112	1093	3729	£263.79	£316.55	25602212	1961	6691	£338.81	£406.57		
	1400	25601114	1275	4350	£295.01	£354.01	25602214	2288	7807	£414.41	£497.29		

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads. SOFTLINE PLAN CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.



Stelrad[®] Softline Series





SOFTLINE COLUMN HORIZONTAL

50 ∆t (75/65/20°C)		2 (
Height mm	Length mm	Stelrad UIN
	628	563012
E00	858	563013
500	1042	563014
	1272	563015
	628	563028
CUU	858	563029
600	1042	563030
	1272	563031

3 COLUMN

Height mm	Length mm	Stelrad UIN	Heat Watts	output Btu/hr	Price excl VAT	Price incl VAT	Length mm	Stelrad UIN	Heat Watts	output Btu/hr	Price excl VAT	Price incl VAT
	444	563000	288	983	£117.45	£140.94	444	563007	377	1287	£151.34	£181.61
	628	563001	416	1420	£151.99	£182.99	628	563008	545	1860	£181.42	£217.70
000	858	563002	576	1966	£202.80	£243.36	858	563009	754	2573	£221.90	£266.28
300	1042	563003	704	2403	£234.00	£280.80	1042	563010	922	3147	£269.71	£323.65
000	1272	563004	864	2949	£280.82	£336.98	1272	563011	1131	3860	£323.47	£388.16
	1456	563005	992	3386	£330.17	£396.20	-	-	-	-	-	-
	1870	563006	1280	4369	£431.78	£518.14	-	-	-	-	-	-
	444	563016	464	1584	£125.12	£150.14	444	563023	608	2075	£158.39	£190.07
	628	563017	671	2290	£145.60	£174.72	628	563024	879	3000	£170.66	£204.79
=	858	563018	929	3171	£182.00	£218.40	858	563025	1217	4154	£207.14	£248.57
500	1042	563019	1135	3874	£244.40	£293.28	1042	563026	1487	5075	£264.90	£317.88
000	1272	563020	1393	4754	£327.60	£393.12	1272	563027	1825	6229	£324.08	£388.90
	1456	563021	1600	5461	£354.50	£425.40	-	-	-	-	-	-
	1870	563022	2064	7044	£435.63	£522.72	-	-	-	-	-	-
	444	563032	548	1870	£148.95	£178.74	444	563039	718	2451	£155.36	£186.43
	628	563033	792	2703	£161.20	£193.44	628	563040	1037	3539	£166.40	£199.68
000	858	563034	1096	3741	£187.20	£224.64	858	563041	1436	4901	£213.20	£255.84
600	1042	563035	1340	4573	£213.20	£255.84	1042	563042	1756	5993	£275.60	£330.72
000	1272	563036	1644	5611	£286.00	£343.20	1272	563043	2155	7355	£327.60	£393.12
	1456	563037	1888	6444	£334.19	£401.03	-	-	-	-	-	-
	1870	563038	2436	8314	£435.42	£522.50	-	-	-	-	-	-
	858	563044	1337	4563	£237.74	£285.29	444	563049	877	2993	£183.44	£220.13
750	1042	563045	1635	5580	£296.76	£356.11	628	563050	1266	4321	£229.44	£275.33
750	1272	563046	2006	6846	£365.71	£438.85	858	563051	1753	5983	£267.23	£320.68
, 50	1456	563047	2303	7860	£417.64	£501.17	1042	563052	2143	7314	£329.96	£395.95
	1870	563048	2972	10143	£536.13	£643.36	1272	563053	2630	8976	£402.63	£483.16

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Floor mounting brackets are available, for more information see page 52.



^{*}based on 600 x 628 x 3 column



Stelrad Softline Series

COLUMN

Heat o	utput	Price	Price
Watts	Btu/h	excl VAT	incl VAT
499	1703	£135.20	£162.24
691	2358	£166.40	£199.68
845	2884	£217.30	£260.76
1037	3539	£268.63	£322.36
589	2010	£145.60	£174.72
815	2782	£166.40	£199.68
997	3403	£213.20	£255.84
1223	4174	£275.60	£330.72

4 COLUMN







SOFTLINE COLUMN CONCEPT

50 At

(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat o Watts	utput Btu/hr	Price excl VAT	Price incl VAT
	628	13	3	563133	792	2703	£239.20	£287.04
	858	18	3	563134	1096	3741	£265.20	£318.24
	1042	22	3	563135	1340	4573	£291.20	£349.44
CUU	1272	27	3	563136	1644	5611	£364.00	£436.80
000	628	13	4	563140	1037	3539	£249.60	£299.52
	858	18	4	563141	1436	4901	£291.20	£349.44
	1042	22	4	563142	1756	5993	£353.60	£424.32
	1272	27	4	563143	2155	7355	£410.80	£492.96

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads. Floor mounting brackets are available, for more information see page 52. SOFTLINE COLUMN CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.



Stelrad Softline Series

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.





SOFTLINE COLUMN VERTICAL


50 At

(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat o Watts	utput Btu/hr	Price excl VAT	Price incl VAT
1000	352	9	2	563054	868	2962	£155.45	£186.54
ΙΟυυ	444	9	2	563055	1116	3809	£187.20	£224.64
2000	352	9	2	563056	966	3297	£172.73	£207.28
2000	444	9	2	563057	1242	4239	£208.00	£249.60
2500	352	9	2	563058	1197	4085	£192.61	£231.13
2000	444	9	2	563059	1539	5253	£231.94	£278.33

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com). Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length. **For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.**



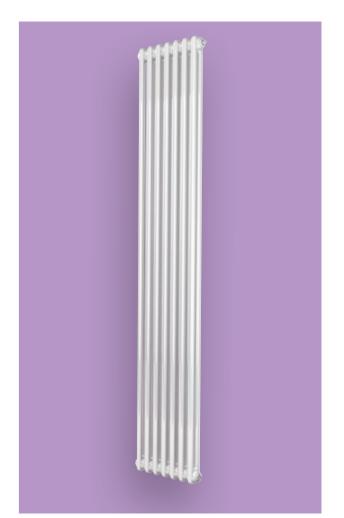





NEW SOFTLINE COLUMN VERTICAL CONCEPT

50 At


(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat o Watts	utput Btu/hr	Price excl VAT	Price incl VAT
1800	444	9	2	563155	1116	3809	£265.20	£318.24
2000	444	9	2	563157	1242	4239	£286.86	£343.20

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com). Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length. For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





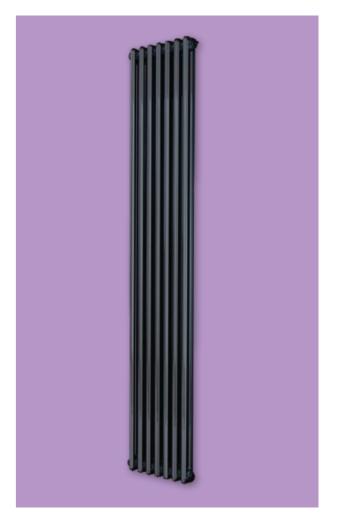



SOFTLINE COMPACT VERTICAL

50 Δt

(75/65/20°C)

Height mm	Length mm	Sections	Stelrad UIN	Heat ou Watts	itput Btu/h	Price excl VAT	Price incl VAT
	400	12	87122418	1584	5405	£219.30	£263.16
1800	500	15	87122518	1980	6756	£241.09	£289.31
	600	18	87122618	2376	8107	£263.89	£316.67

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



We recommend TRV Valves to complete the look. See page 52 for more information.



*based on a 1800 x 400 K2



Stelrad' Softline Series

K2 D-CD-C





SOFTLINE DECO VERTICAL

50∆t (75/65/20°C)

Height mm	Length mm	Sections	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
	400	12	87222418	1476	5036	£293.40	£352.08
1800	500	15	87222518	1845	6295	£322.42	£386.90
	600	18	87222618	2214	7554	£353.08	£423.70

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.




We recommend TRV Valves to complete the look. See page 52 for more information.



*based on a 1800 x 400 K2





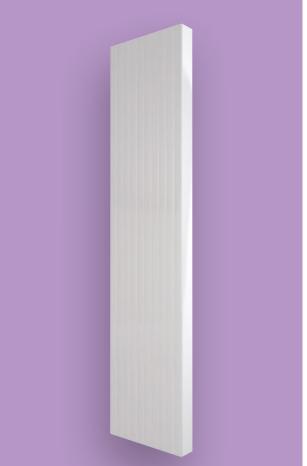





NEW SOFTLINE DECO VERTICAL CONCEPT

50 Δt

(75/65/20°C)

Height mm	Length mm	Sections	Stelrad UIN	Heat o Watts	utput Btu/hr	Price excl VAT	Price incl VAT
	400	12	24182204	1476	5036	£389.26	£467.11
1800	500	15	24182205	1845	6295	£418.28	£501.94
	600	18	24182206	2214	7554	£448.94	£538.73

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



We recommend TRV Valves to complete the look. See page 52 for more information.





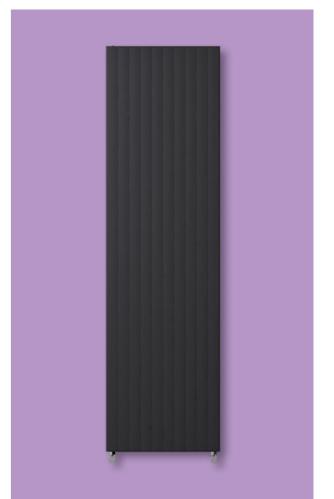



SOFTLINE PLAN VERTICAL

50∆t (75/65/20°C)

Height mm	Length mm	Sections	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
	400	12	87322418	1476	5036	£316.25	£379.50
1800	500	15	87322518	1845	6295	£350.67	£420.80
	600	18	87322618	2214	7554	£383.78	£460.54

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.




We recommend TRV Valves to complete the look. See page 52 for more information.





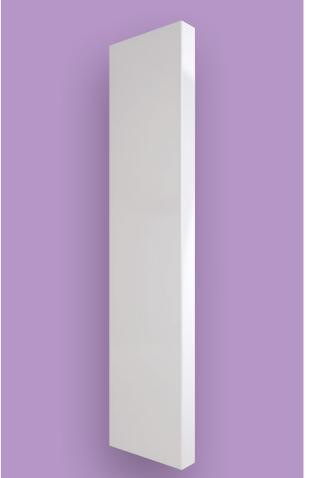

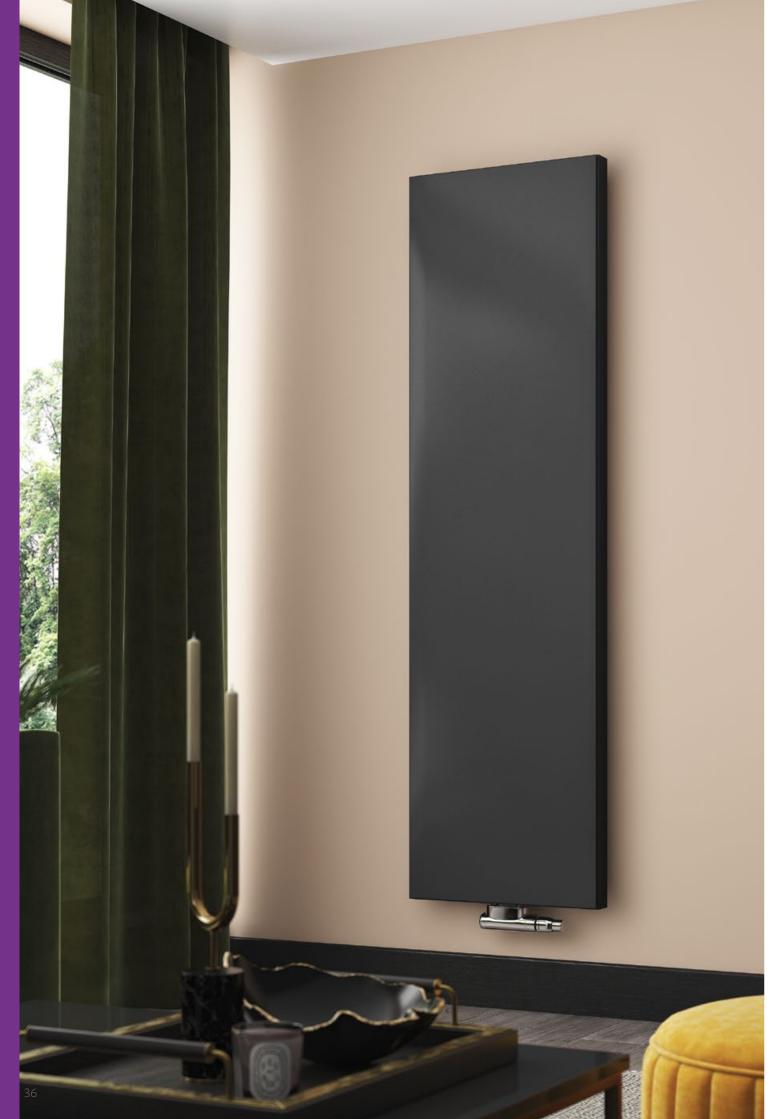

NEW SOFTLINE PLAN VERTICAL CONCEPT

50 At

(75/65/20°C)

Height mm	Length mm	Sections	Stelrad UIN	Heat o Watts	utput Btu/h	Price excl VAT	Price incl VAT
	400	12	25182204	1476	5036	£412.11	£494.53
1800	500	15	25182205	1845	6295	£446.53	£535.84
	600	18	25182206	2214	7554	£479.64	£575.57

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



We recommend TRV Valves to complete the look. See page 52 for more information.





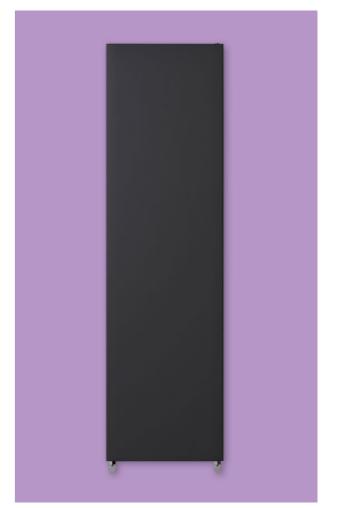



SOFTLINE COMPACT K3

50∆t (75/65/20°C)

Height mm	Length mm	Sections	Stelrad UIN	Heat o Watts	butput Btu/hr	Price excl VAT	Price incl VAT
	400	12	80603304	956	3262	£116.17	£139.40
	500	15	80603305	1195	4077	£140.42	£168.50
	600	18	80603306	1433	4889	£161.88	£194.26
	700	21	80603307	1672	5705	£184.37	£221.24
600	800	24	80603308	1911	6520	£209.88	£251.86
000	900	27	80603309	2150	7336	£231.93	£278.32
	1000	30	80603310	2389	8151	£253.56	£304.27
	1100	33	80603311	2628	8967	£276.39	£331.67
	1200	36	80603312	2867	9782	£301.72	£362.06
	1400	42	80603314	3345	11413	£324.42	£389.30

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



Stelrad[®] Softline Series







SOFTLINE CONCORD PLANE

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
	500	6	548346	392	1338	£118.11	£141.73	548397	685	2337	£207.33	£248.80
	600	6	548347	470	1604	£123.15	£147.78	548398	821	2801	£211.10	£253.32
	700	6	548348	549	1873	£129.43	£155.32	548399	958	3269	£226.18	£271.42
	800	6	548349	627	2139	£135.71	£162.85	548400	1095	3736	£241.26	£289.51
444	900	6	548350	706	2409	£138.25	£165.90	548401	1232	4204	£252.57	£303.08
	1000	6	548351	784	2675	£140.73	£168.88	548402	1369	4671	£263.88	£316.66
	1100	6	548352	862	2941	£150.78	£180.94	548403	1506	5139	£282.72	£339.26
	1200	6	548353	941	3211	£163.35	£196.02	548404	1643	5606	£301.57	£361.88
	1400	6	548354	1098	3747	£169.62	£203.54	548405	1917	6541	£314.15	£376.98
	500	8	548363	501	1709	£138.25	£165.90	548414	849	2897	£251.30	£301.56
	600	8	548364	601	2051	£147.02	£176.42	548415	1018	3474	£263.88	£316.66
	700	8	548365	701	2392	£149.54	£179.45	548416	1188	4054	£276.43	£331.72
	800	8	548366	802	2737	£150.78	£180.94	548417	1358	4634	£289.02	£346.82
592	900	8	548367	902	3078	£157.07	£188.48	548418	1527	5210	£307.85	£369.42
OOL	1000	8	548368	1002	3419	£163.35	£196.02	548419	1697	5790	£329.23	£395.08
	1100	8	548369	1102	3760	£175.92	£211.10	548420	1867	6370	£351.85	£422.22
	1200	8	548370	1202	4101	£185.98	£223.18	548421	2036	6947	£376.97	£452.36
	1400	8	548371	1403	4787	£192.23	£230.68	548422	2376	8107	£399.57	£479.48

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com). For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

If feet are required, they must be ordered when you purchase your product. The feet are welded on and cannot be added to the product once your order has been placed.

FLOOR MOUNTING BRACKET INFORMATION 400 - 1500mm 2 feet



Stelrad[®] Softline Series

SINGLE

DOUBLE





SOFTLINE CONCORD VERTICAL Softline Series

50 At (75/65/20°C)

Height mm	Length mm	Elements	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
	444	6	548340	852	2907	£192.23	£230.68	548640	1254	4279	£346.01	£415.21
1800	592	8	548341	1136	3876	£214.88	£257.86	548641	1672	5705	£397.53	£477.04
1000	740	10	548342	1420	4845	£248.81	£298.57	548642	2090	7131	£472.73	£567.28
	444	6	548343	942	3214	£201.04	£241.25	548643	1386	4729	£381.97	£458.36
2000	592	8	548344	1256	4286	£223.67	£268.40	548644	1848	6306	£424.98	£509.98
	740	10	548345	1570	5357	£257.59	£309.11	548645	2310	7882	£502.29	£602.75

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



|--|

DOUBLE





NEW SOFTLINE CONCORD VERTICAL CONCEPT

50 At

(75/65/20°C)

Height mm	Length mm	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
1000	444	548652	852	2907	£270.23	£324.28
1800	592	548653	1136	3876	£292.88	£351.46
1000	740	548654	1420	4845	£326.81	£392.17
				DOUBLE		
Height mm	Length mm	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
	444	548655	1254	4279	£424.01	£508.81
1800	592	548656	1672	5705	£480.73	£576.88

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



Stelrad Softline Series

SINGLE





SOFTLINE CONCORD SLIMLINE


50∆t (75/65/20°C)

Height mm	Length mm	Elements	Stelrad UIN	Heat o Watts	output Btu/hr	Price excl VAT	Price incl VAT
	320	8	548300	872	2975	£206.08	£247.30
1800	440	11	548301	1199	4091	£276.43	£331.72
ΙΟυυ	520	13	548302	1417	4835	£307.85	£369.42
	640	16	548303	1744	5951	£376.97	£452.36
	320	8	548304	978	3337	£212.36	£254.83
2000	440	11	548305	1344	4586	£282.72	£339.26
2000	520	13	548306	1589	5422	£316.64	£379.97
	640	16	548307	1956	6674	£390.81	£468.97

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



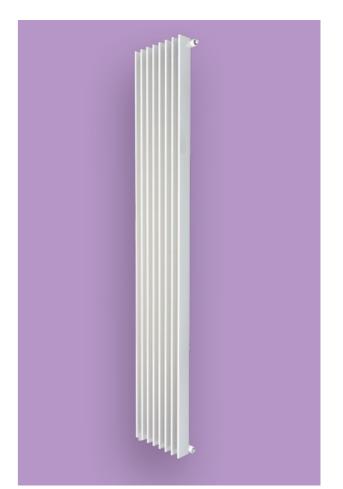



NEW SOFTLINE CONCORD SLIMLINE CONCEPT

50 Δt


(75/65/20°C)

Height mm	Length mm	Elements	Stelrad UIN	Heat o Watts	utput Btu/hr	Price excl VAT	Price incl VAT
1800	320	8	548658	872	2975	£284.08	£340.90
	440	11	548659	1199	4091	£354.43	£425.32
	520	13	548660	1417	4835	£385.85	£463.02
	640	16	548661	1744	5951	£460.17	£552.20

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



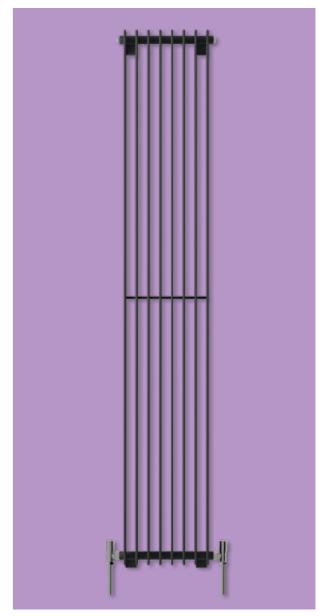

EXTRA PERFORMANCE TO GUARANTEED STANDARDS

Stelrad combine the most sophisticated production resources in Europe with substantial investment in testing and verification of performance data - which has helped us create high output radiators delivering heating performance that exceeds expectation.

MORE CHOICE FOR APPLICATION FLEXIBILITY

A range of models provide extra sizing flexibility and covers a multitude of application requirements, including those where there are installation difficulties or where wall space is at a premium.

SUPERB QUALITY FROM DESIGN TO INSTALLATION

Our radiators are specifically designed to minimise any movement, providing a tight, professional fit that will remain in place, even after storage, transit and installation. Convectors are precision welded directly onto the waterways for greater efficiency and economy, with flexible connection options for the highest of commercial and domestic application specifications.

Stelrad radiators are manufactured under ISO 9001 quality systems in the UK and every one comes wrapped in robust, practical packaging that will keep the product pristine, right through to installation. This clever packaging design allows installation to be completed prior to removal.

COMPUTER GENERATED IMAGES (CGI)

CGI's are for illustration purposes only.

STEEL PANEL RADIATORS

If a steel panel radiator is placed in a high humidity area, warranty reduces to 12 months.

BRANDED STICKER

Please note, all premium panel products will have a Stelrad branded sticker on.

TEMPERATURE TABLE

For systems not operating at Δ t50 the factors in the table below should be applied. The output of a given radiator can be obtained by multiplying the quoted Δ t50 output by the operating factor. Conversely, to derive a non Δ t50 output, divide the heat output required by the relevant operation factor. This ' Δ t50 equivalent output' can then be used to select a radiator from the standard tables.

	°C		٥F
Δt	Operating Factor	Δt	Operating Factor
5	0.050	10	0.057
10	0.123	20	0.142
15	0.209	30	0.240
20	0.304	40	0.348
25	0.406	50	0.466
30	0.515	60	0.590
35	0.629	70	0.721
40	0.748	80	0.858
45	0.872	90	1.000
50	1.000	100	1.147
55	1.132	110	1.298
60	1.267	120	1.454
65	1.406	130	1.613
70	1.549	150	1.776
75	1.694	-	-

Example: Exact output at Δ t50 = 2000 Btu/hr Output at Δ t30 = 2000 x 0.515 = 1030 Btu/hr Average coefficient of 130 is used in the example above

APPLICATIONS

Stelrad radiators are suitable for two pipe installations. For single pipe applications, it is advisable to use diversion tees in the pipework, as this will assist in obtaining design performance from the radiators. Although our radiators are suitable for Microbore pipework, the back tappings make them unsuitable for twin entry valves.

INSTALLATION

Everything required for installation can be found within each radiator's packaging. Brackets are of a strong design, with open top and deep slots, which facilitate easy and secure installation. Plastic inserts seat the radiator precisely on the bracket minimising expansion and contraction noise.

The neat nickel-plated plug and vent provide a watertight joint, whilst complementing the superior finish.

To facilitate easy one off replacement, nickel-plated brass extension pieces are also available, complete with sealing washer, in 20mm, 30mm and 40mm options. Recommended height from the floor to the base of the radiator is 150mm minimum. This allows adequate airflow when the radiator is placed on the bracket.

CAUTION

When designing for domestic systems we recommend that the Stelrad radiators are only used in heating systems complying with British Standard Code of Practice for Central Heating for Domestic Premises BS EN 12828:2003 and BS EN 12831:2003.

Single feed, direct cylinders are not recommended as should interchange of water occur, fresh aerated water would enter the heating system, resulting in corrosion.

WATER TREATMENT

On completion of the installation, the system should be properly flushed and filled in accordance with the British Standard Code of Practice BS 7593:2006 for the Treatment of Water in Domestic Hot Water Central Heating Systems, Part L of Building Regulations and Good Practice Guidance for Scotland.

After installation of a new Stelrad radiator the central heating system should be cleaned and flushed with cleaner to remove existing contaminants, flux residue and other installation debris which, if left, can cause damage to the new radiator. Afterwards, treat the system with an inhibitor to ensure long term protection against corrosion and limescale. A comprehensive range of quality chemicals including inhibitors, cleaners, leak sealers and noise reducers that protect and maintain central heating systems can be obtained from:

Sentinel Performance Solutions Ltd

- 7650 Daresbury Park,
- Warrington,
- Cheshire, WA4 4BS,
- www.sentinelprotects.com

Fernox

- Unit 2 Genesis Business Park,
- Albert Drive, Sheerwater,
- Woking, Surrey,
- GU21 5RW
- www.fernox.com

TWO COAT PAINT PROCESS

Each Stelrad radiator is subjected to a multi stage cleaning process before the paint is applied. This involves several rinsing stages, including an iron phosphate and demineralisation rinse. The first coat of paint is applied by electrophoresis and the radiator is then stoved and cooled. The second powder coat is applied and the radiator goes through a final curing stage. It is then allowed to cool, prior to packaging.

The Stelrad STARS Basic & Advanced Heatloss Calculator contains an inbuilt U value calculator.


Save time and effort by using the Stelrad STARS program - the perfect solution for accurate sizing and design flexibility.

Basic: http://starsapp.co.uk/basic-heat-loss-calculator/

Advanced: http://app.starsapp.co.uk/login

For further information and advice call 0844 543 6200.

ACCESSORIES

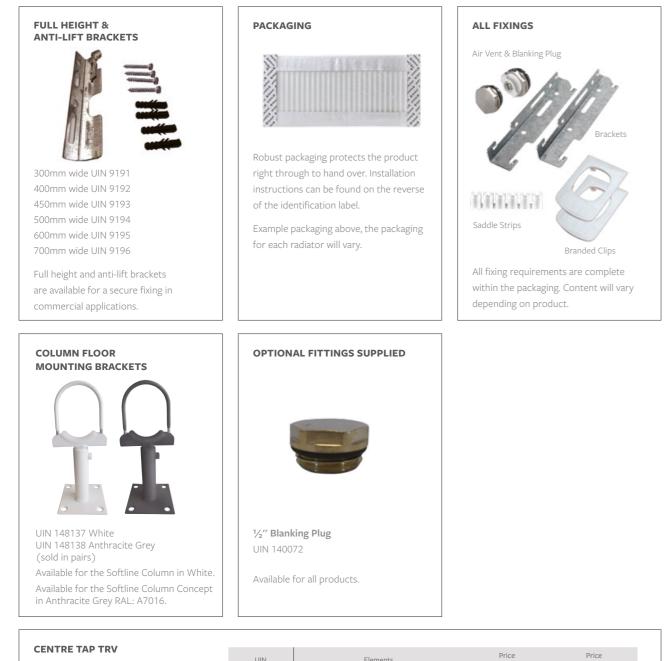





Available for the Softline Compact Vertical, Softline Deco Vertical, Softline Plan Vertical, Softline Deco Vertical Concept and Softline Plan Vertical Concept.

UIN	Elements	Price excl VAT	Price incl VAT
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM	£52.65	£63.18
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN	£52.65	£63.18
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM	£52.65	£63.18
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM	£52.65	£63.18
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN	£52.65	£63.18
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM	£52.65	£63.18
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM	£52.65	£63.18
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN	£52.65	£63.18
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM	£52.65	£63.18
14531610	CENTRE TAP TRV ANGLED L CHROME -10MM	£52.65	£63.18
14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN	£52.65	£63.18
14531615	CENTRE TAP TRV ANGLED L CHROME -15MM	£52.65	£63.18
14531710	CENTRE TAP TRV ANGLED R WHITE -10MM	£52.65	£63.18
14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN	£52.65	£63.18
14531715	CENTRE TAP TRV ANGLED R WHITE -15MM	£52.65	£63.18
14531810	CENTRE TAP TRV ANGLED R CHROME -10MM	£52.65	£63.18
14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN	£52.65	£63.18
14531815	CENTRE TAP TRV ANGLED R CHROME -15MM	£52.65	£63.18

GLOSSARY

Btu/hr	British Thermal Unit per hour is the standard measurement used to state the amount of output of any heat generating device.
Watts	Is another measurement for heat output, 1 watt is equivalent to 3.412 Btu/hr.
P1	Also known as Type 10, is a type of radiator with 1 radiator panel and no convection fins.
P2	Also known as Type 20, is a type of radiator with 2 radiator panels and no convection fins.
K1	Also known as Type 11, is a type of radiator with 1 radiator panel and 1 set of convection fins.
P+	Also known as Type 21, is a type of radiator with 2 radiator panels and 1 set of convection fins.
K2	Also known as Type 22, is a type of radiator with 2 radiator panels and 2 sets of convection fins.
K3	Also known as Type 33, is a type of radiator with 3 radiator panels and 3 sets of convection fins.
Δt	Refers to the difference in temperature between the water circulating in the central heating system and that of the ambient temperature. It is important to use the correct Δt when selecting your radiators, as the same radiator will have different outputs at different water temperatures.
Δt50	Δ t50 is the UK standard, however Stelrad also quote at lower levels for lower water temperature systems.
Heat loss	Is the amount of heat a room loses, it is therefore an important calculation when determining what size radiator is required to heat a room to the correct level.
UIN	Is the unique identification number for Stelrad products.
Warranty	The warranty covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.
ISO14001	Is a set of International regulations related to the environment.
ISO9001	Is a set of International regulations related to quality management systems.
OHSAS18001	Is a set of International regulations related to health and safety.
TBOE / BOE	Refers to which position the pipes are connected to the radiator, OE means opposite end i.e. 1 pipe on each side, TB is top bottom i.e. 1 pipe is connected to the top and 1 to the bottom, B is both pipes connected to the bottom.
CETIAT tested	A leading independent French laboratory which conducts testing and assessments.
EN 442	EN 442 is the European standard which defines the manufacturing standards for radiators and convectors which operate at temperatures of less than 120°C. The standard defines the type of steel which must be used, the type of pressure testing which must be carried out and the accuracy of the heat outputs quoted in the literature.
KIWA	Kiwa Ltd is an energy consultancy, Notified Body, UKAS-accredited testing lab and training centre with expertise in gas, oil, solid fuel, biomass and other renewables, construction materials, water and electricity.
RAL	A European wide colour matching system.
BSP	British Standard Piping.
MARC	MARC - the Manufacturers' Association of Radiators and Convectors.
CIBSE	The Chartered Institution of Building Services Engineers is the prime source of expertise in the Building Services industry.
RIBA	RIBA aims to support British architects and introduce new people to the world of architecture.
BIID	The British Institute of Interior Design is a professional organisation for commercial and residential interior designers in Britain.

ICON KEY



5 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



15 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



Business Information Modelling. Visit www.stelrad.com to download BIM components.



Augmented reality app available on the Apple App Store and Google Play Store.

CORPORATE SOCIAL RESPONSIBILITY (CSR)

Stelrad recognises that its success is built on integrating business values and operations to meet the expectations of stakeholders. Stelrad's social, economic and environmental responsibilities are to these stakeholders, which are demonstrated throughout its business practises, policies and achievements. Stelrad are committed to Integrated Management Systems for control of Quality, Health and Safety and Environment, which are certificated to BSI OHSAS / ISO standards.

Wherever possible, Stelrad sources renewable and recyclable materials. 100% of all metal and other raw materials throughout the manufacturing process are recycled.

A full CSR policy document is available on request.



The maximum working pressure is the limit at which the system can operate. Different designs and types of construction requires different gauges of steel in order achieve the desired working pressure.



Softline Concord Plane and Softline Concord Vertical radiators are manufactured using 1.25mm thick steel.



Softline Concord Slimline radiators are manufactured using 1.5mm thick steel.



Video available - visit www.stelrad.com



Stelrad

Radiator Group



Follow us on





Stelrad Limited, Stelrad House, Marriott Road Mexborough, South Yorkshire, S64 8BN

www.stelrad.com Telephone: 0844 543 6200

UIN 208905 10/20

