

# VITA COMPACT K3

**50  $\Delta t$**

(75/65/20°C)

**K3**



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
<b>600</b>	400	12	76603304	956	3262	£83.54	£100.25
	500	15	76603305	1195	4077	£96.94	£116.33
	600	18	76603306	1433	4889	£107.38	£128.86
	700	21	76603307	1672	5705	£116.94	£140.33
	800	24	76603308	1911	6520	£124.11	£148.93
	900	27	76603309	2150	7336	£134.24	£161.09
	1000	30	76603310	2389	8151	£143.20	£171.84
	1100	33	76603311	2628	8967	£157.50	£189.00
	1200	36	76603312	2867	9782	£171.82	£206.18
	1400	42	76603314	3345	11413	£221.34	£265.61

$\Delta t50$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t40$  or  $\Delta t30$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.


# VITA COMPACT K3

Vita Series


## WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.


REAR ELEVATION

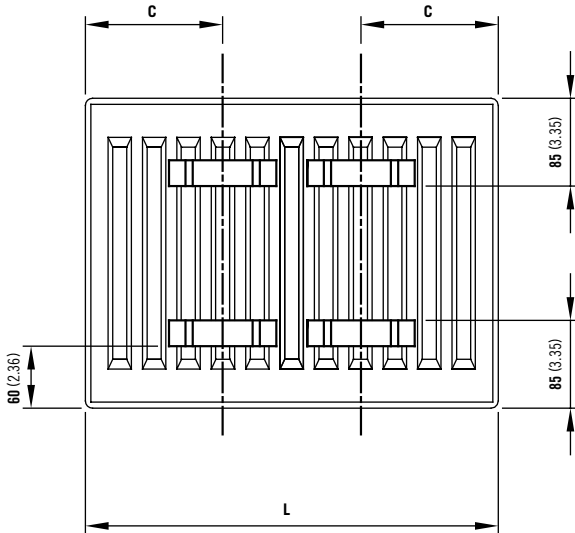

SIDE ELEVATION

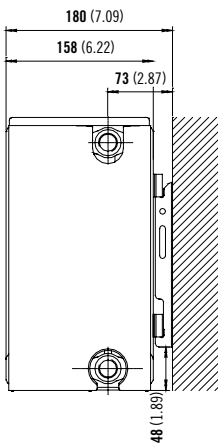

TOP ELEVATION




L	C
400 - 1100	133
1200 - 2400	133

# VITA COMPACT K3



Vita Series

## FLOORSTANDING BRACKETS

All dimensions in mm. Inches in brackets.

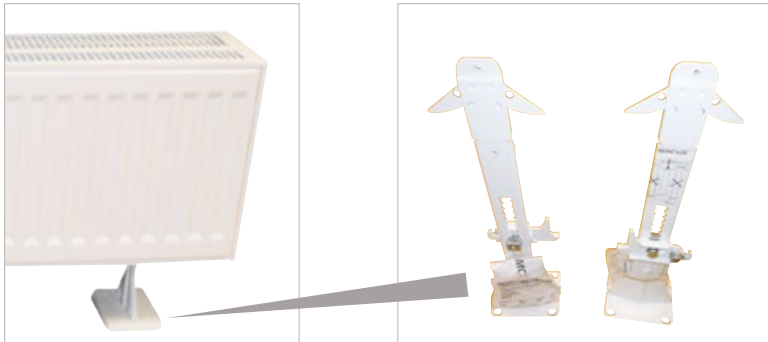

Floor brackets

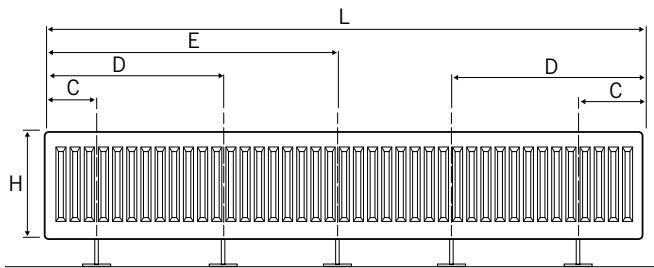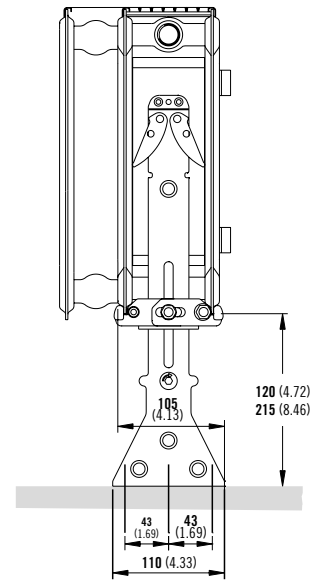

	L	400	500 - 1100	1200	1400 - 1800	2000 - 3000
H	Number	2pc				3pc
300	C	117	150	250	250	250
500	E	-	-	-	-	L/2+17

	L	400	500 - 1100	1200	1400 - 1800	2000	2200	2400	2600	2800	3000
H	Number	2pc			3pc	4pc			5pc		
600	C	117	150	250	250	250			250		
700	D	-	-	-	-	750	817	850	750	817	850
	E	-	-	-	817	-	-	-	L/2+17		

## CONNECTIONS


Each radiator comes with 1/2" inlet connections as standard.

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K3
Height	600
W/m at 75/65/20	2389
n-coefficients	1.32
Heated surface area (m2/m)	11.61
Weight (kg/m)	52.50
Water contents (l/m)	9.80
Wall to tap centre (mm)	73

# VITA COMPACT K3

## PRESSURE DROPS

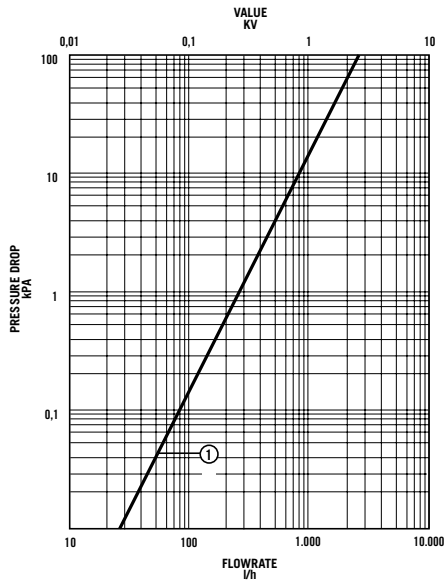

① Type 33 (K3)