


VITA PLAN VERTICAL

Vita Series

50 Δt

(75/65/20°C)

K2




Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
1800	400	12	89322418	1476	5036	£259.91	£311.89
	500	15	89322518	1845	6295	£288.20	£345.84
	600	18	89322618	2214	7554	£315.42	£378.50

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00




VITA PLAN VERTICAL

Vita Series


WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

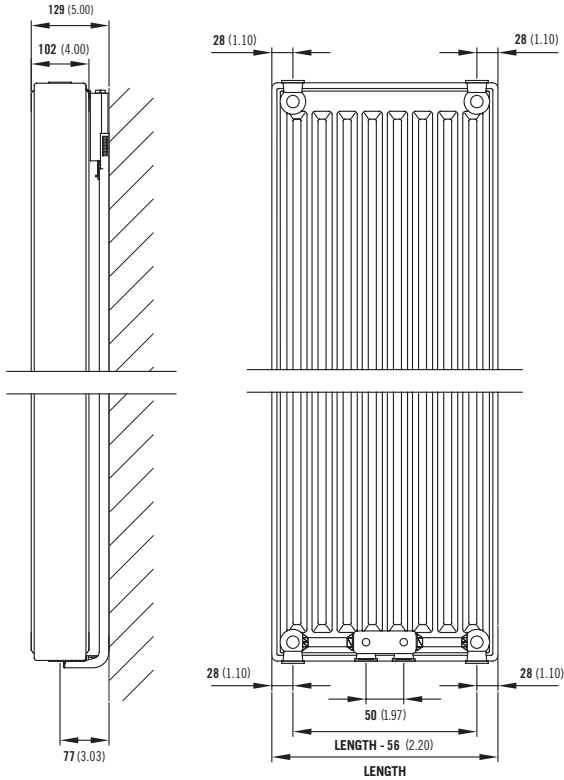

Comes complete with Stelrad's class leading safety bracket.

MOUNTING BRACKETS



Height		H2		H3		H4	
mm	inches	mm	inches	mm	inches	mm	inches
1800	70.87	70	2.75	830	43.89	1590	63.58


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

VITA PLAN VERTICAL

Vita Series

PIPING OPTIONS

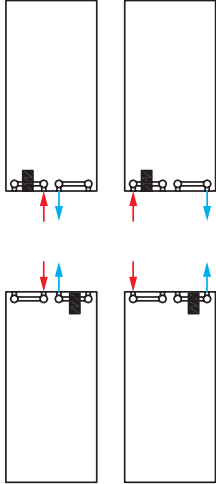

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K2
Height	1800
W/m at 75/65/20	3690
n-coefficients	1.32
Heated surface area (m ² /m)	29.90
Weight (kg/m)	105.30
Water contents (l/m)	15.90
Wall to tap centre (mm)	77
K _M	20.70

PRESSURE DROPS

