




SOFTLINE COMPACT K3

Softline Series

50 Δt

(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
600	400	12	80603304	956	3262	£116.17	£139.40
	500	15	80603305	1195	4077	£140.42	£168.50
	600	18	80603306	1433	4889	£161.88	£194.26
	700	21	80603307	1672	5705	£184.37	£221.24
	800	24	80603308	1911	6520	£209.88	£251.86
	900	27	80603309	2150	7336	£231.93	£278.32
	1000	30	80603310	2389	8151	£253.56	£304.27
	1100	33	80603311	2628	8967	£276.39	£331.67
	1200	36	80603312	2867	9782	£301.72	£362.06
	1400	42	80603314	3345	11413	£324.42	£389.30

$\Delta t 50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t 40$ or $\Delta t 30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


SOFTLINE COMPACT K3

Softline Series


WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.


REAR ELEVATION

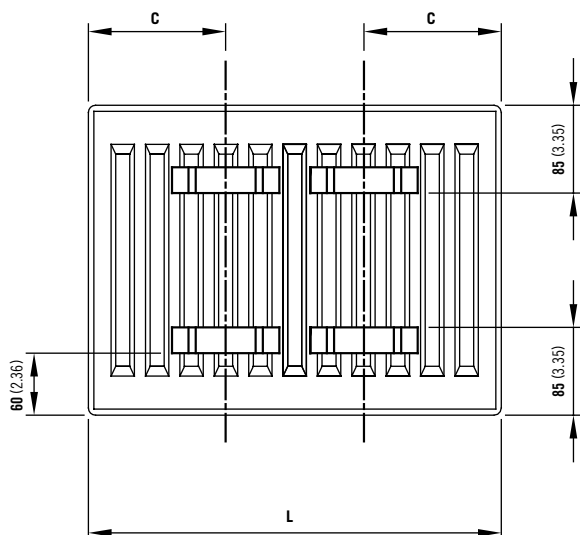

SIDE ELEVATION

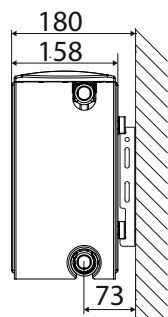

TOP ELEVATION



L	C
400 - 1100	133
1200 - 2400	133

SOFTLINE COMPACT K3



Softline Series

FLOORSTANDING BRACKETS

All dimensions in mm. Inches in brackets.



Floor brackets

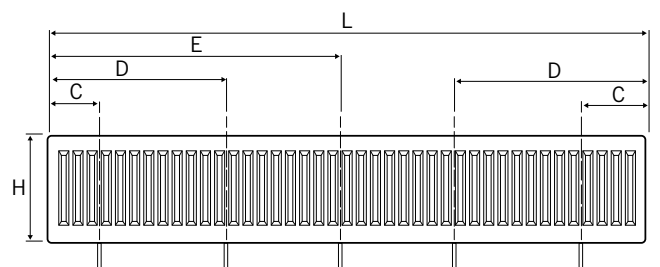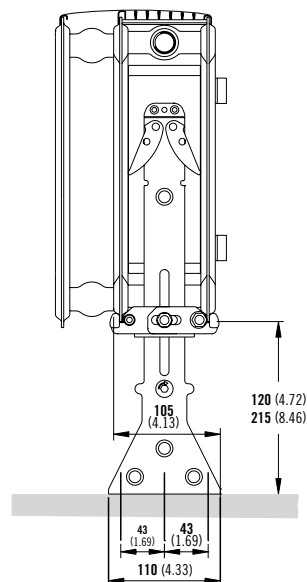

	L	400	500 - 1100	1200	1400 - 1800	2000 - 3000
H	Number	2pc				3pc
300	C	117	150	250	250	250
500	E	-	-	-	-	L/2+17

	L	400	500 - 1100	1200	1400 - 1800	2000	2200	2400	2600	2800	3000
H	Number	2pc		3pc	4pc			5pc			
600	C	117	150	250	250	250			250		
700	D	-	-	-	-	750	817	850	750	817	850
	E	-	-	-	817	-	-	-	L/2+17		

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K3
Height	600
W/m at 75/65/20	2389
n-coefficients	1.32
Heated surface area (m2/m)	11.61
Weight (kg/m)	52.50
Water contents (l/m)	9.80
Wall to tap centre (mm)	73

SOFTLINE COMPACT K3

Softline Series

PRESSURE DROPS

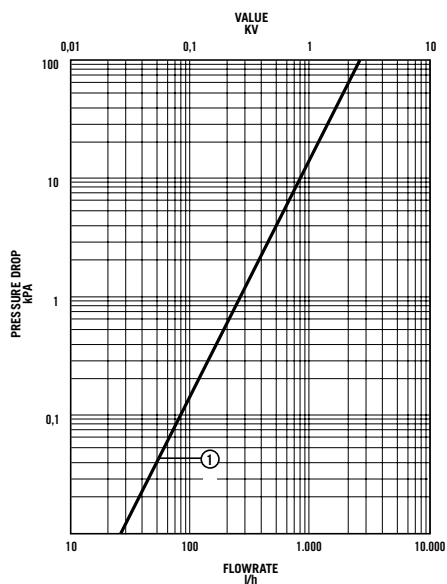

① Type 33 (K3)