

SOFTLINE PLAN CONCEPT

Softline Series

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
			Watts	Btu/hr				Watts	Btu/hr		
600	400	25601104	364	1242	£110.55	£132.66	25602204	654	2231	£142.15	£170.58
	600	25601106	547	1866	£115.83	£139.00	25602206	980	3344	£163.21	£195.85
	800	25601108	729	2487	£142.15	£170.58	25602208	1307	4459	£179.00	£214.80
	1000	25601110	911	3108	£157.93	£189.52	25602210	1634	5575	£194.79	£233.75
	1200	25601112	1093	3729	£179.01	£214.81	25602212	1961	6691	£226.38	£271.66
	1400	25601114	1275	4350	£200.06	£240.07	25602214	2288	7807	£273.77	£328.52

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


SOFTLINE PLAN CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.

SOFTLINE PLAN CONCEPT

Softline Series


WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

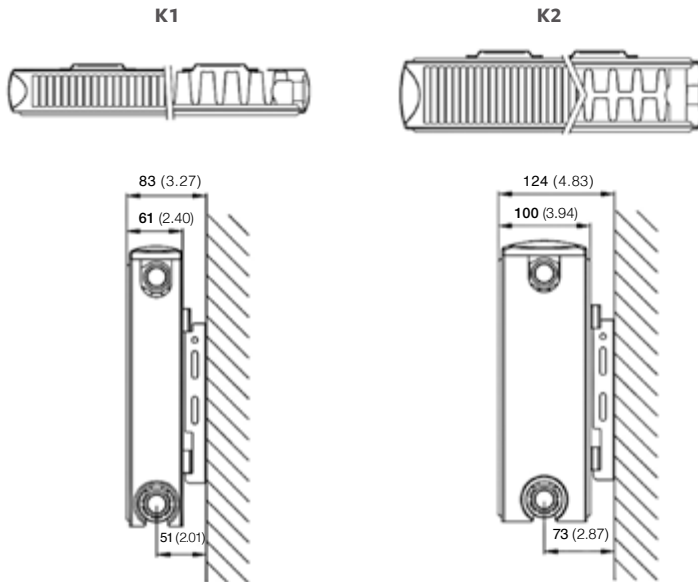

MOUNTING BRACKETS

All dimensions in mm. Inches in brackets.

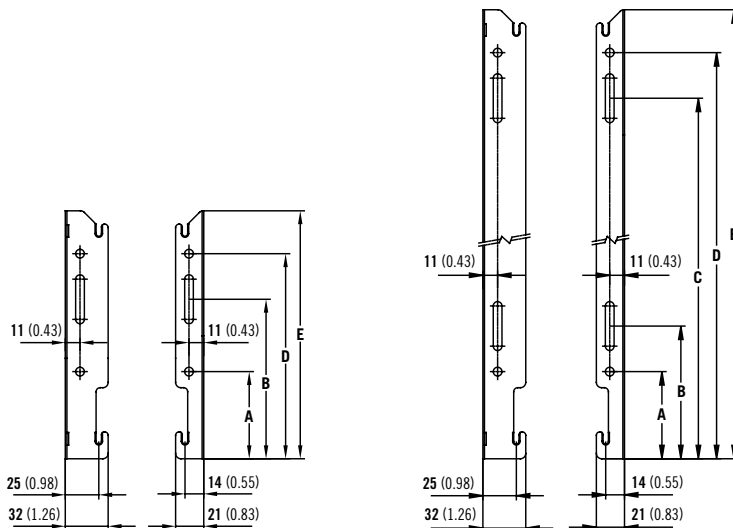


Dimensions	mm	inches
Height	600	23.62
A	65	2.56
B	99	3.90
C	419	16.50
D	453	17.83
E	485	19.09

SOFTLINE PLAN CONCEPT

Softline Series

K1 & K2 LUG POSITIONS (New as of June 2016).
All dimensions in mm. Inches in brackets.

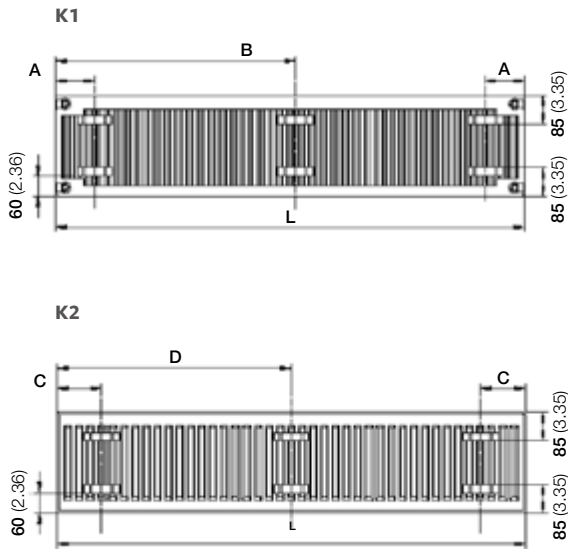


L	K1				K2			
	A		B		C		D	
	mm	in	mm	in	mm	in	mm	in
400	117	4.60	-	-	133	5.24	-	-
500 - 1100	150	5.90	-	-	133	5.24	-	-
1200 - 1600	150	5.90	-	-	133	5.24	-	-
1800 - 2000	150	5.90	(L/2) + 17		133	5.24	L/2	

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

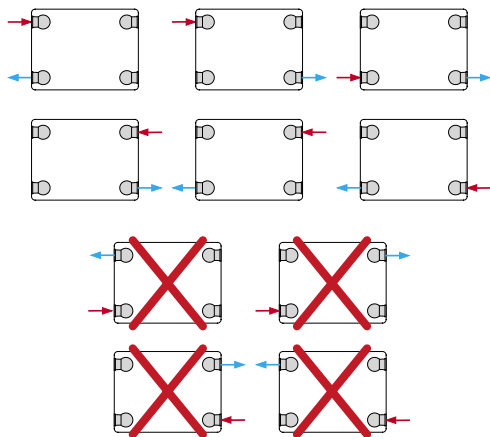

SOFTLINE PLAN CONCEPT

Softline Series

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1	K2
Height	600	600
W/m at 75/65/20	911	1634
n-coefficients	1.27	1.32
Heated surface area (m ² /m)	4.66	7.74
Weight (kg/m)	24.65	40.00
Water contents (l/m)	3.25	6.60
Wall to tap centre (mm)	51	73

PRESSURE DROPS

