

### 50 $\Delta t$

(75/65/20°C)

**K1**



**K2**



Height mm	Length mm	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
			Watts	Btu/h				Watts	Btu/h		
<b>300</b>	500	92301105	235	802	£25.40	£30.48	92302205	449	1532	£42.00	£50.40
	1000	92301110	470	1604	£41.44	£49.73	92302210	898	3064	£65.86	£79.03
	1500	92301115	705	2405	£58.94	£70.73	92302215	1347	4596	£101.18	£121.42
<b>450</b>	400	92451104	272	928	£26.50	£31.80	92452204	509	1737	£41.19	£49.43
	600	92451106	409	1396	£32.00	£38.40	92452206	764	2607	£52.96	£63.55
	800	92451108	545	1860	£40.32	£48.38	92452208	1018	3473	£61.19	£73.43
	1000	92451110	681	2324	£50.40	£60.48	92452210	1273	4343	£70.59	£84.71
	1200	92451112	817	2788	£60.47	£72.56	92452212	1528	5214	£84.73	£101.68
	1400	92451114	953	3252	£70.57	£84.68	92452214	1782	6080	£109.15	£130.98
	1600	92451116	1090	3719	£80.65	£96.78	92452216	2037	6950	£124.74	£149.69
	1800	92451118	1226	4183	£98.50	£118.20	92452218	2291	7817	£140.34	£168.41
<b>600</b>	400	92601104	348	1187	£30.00	£36.00	92602204	640	2184	£44.94	£53.93
	600	92601106	522	1781	£35.53	£42.64	92602206	961	3279	£57.77	£69.32
	800	92601108	696	2375	£43.99	£52.79	92602208	1281	4371	£66.76	£80.11
	1000	92601110	870	2968	£54.99	£65.99	92602210	1601	5463	£77.03	£92.44
	1200	92601112	1044	3562	£65.98	£79.18	92602212	1921	6554	£92.43	£110.92
	1400	92601114	1218	4156	£76.97	£92.36	92602214	2241	7646	£119.07	£142.88
	1600	92601116	1392	4750	£87.97	£105.56	92602216	2562	8742	£136.09	£163.31
	1800	92601118	1566	5343	£107.45	£128.94	92602218	2882	9833	£153.08	£183.70
	2000	92601120	1740	5937	£110.22	£132.26	92602220	3202	10925	£234.30	£281.16

$\Delta t$ 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t$ 40 or  $\Delta t$ 30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.


See how a Stelrad Vita Silhouette is manufactured at [www.stelrad.com](http://www.stelrad.com)

# VITA SILHOUETTE

Vita Series


## WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

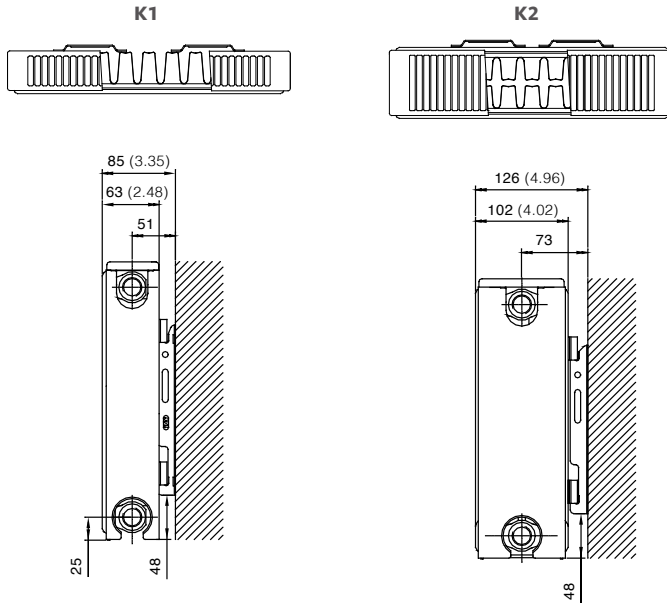

## MOUNTING BRACKETS

All dimensions in mm. Inches in brackets. Floor mounting brackets available.

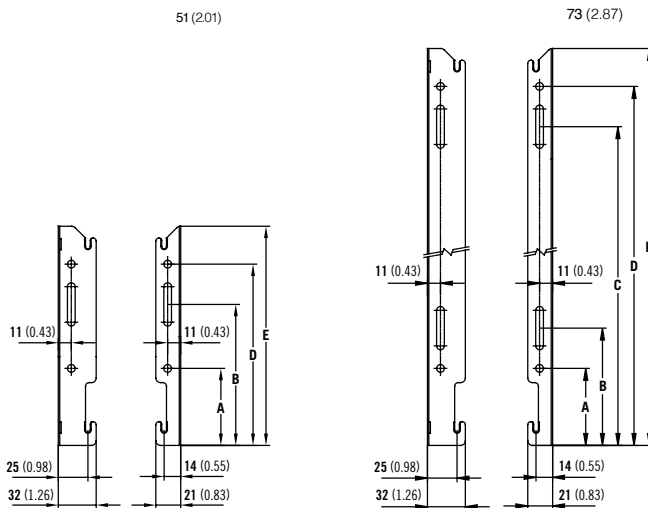


Dimensions	mm	inches	mm	inches	mm	inches
Height	300	11.81	450	17.72	600	23.62
A	65	2.56	65	2.56	65	2.56
B	119	4.69	99	3.90	99	3.90
C	-	-	269	10.59	419	16.50
D	153	6.02	303	11.93	453	17.83
E	185	7.28	335	13.19	485	19.09

# VITA SILHOUETTE

Vita Series

## K1 & K2 LUG POSITIONS (New as of June 2016).

All dimensions in mm. Inches in brackets.

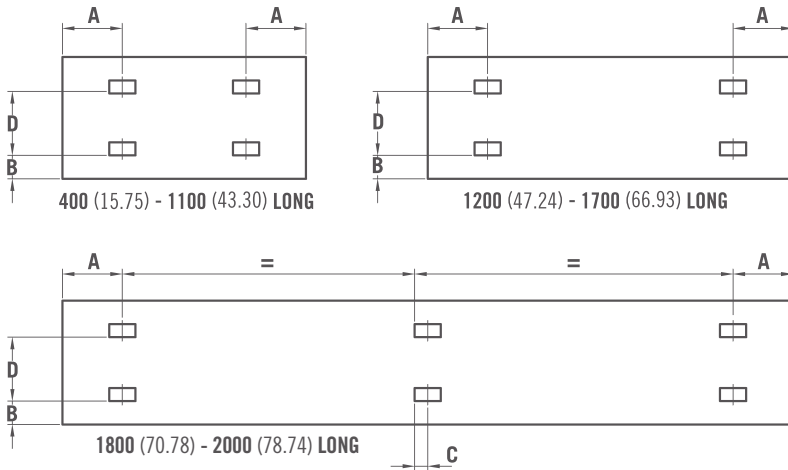


PANEL HEIGHT				K1		K2		
mm	in	mm	in	mm	in	mm	in	
300	11.81	155	6.10	A 400mm	117	4.61	133	5.24
450	17.72	305	12.01	A 500 - 2000mm	150	5.91	133	5.24
600	23.62	455	17.91	B 400 - 2000mm	60	2.36	60	2.36
700	27.56	555	21.95	C 1800 - 2000mm	17	0.67	L/2	L/2

L/2 is the length divided by two.


## CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

## PIPING OPTIONS

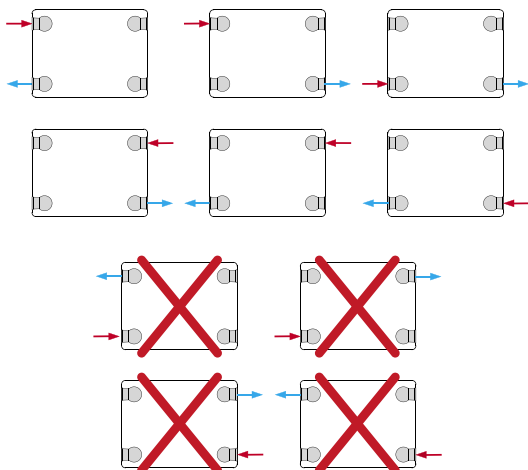

### PRESSURE DROP

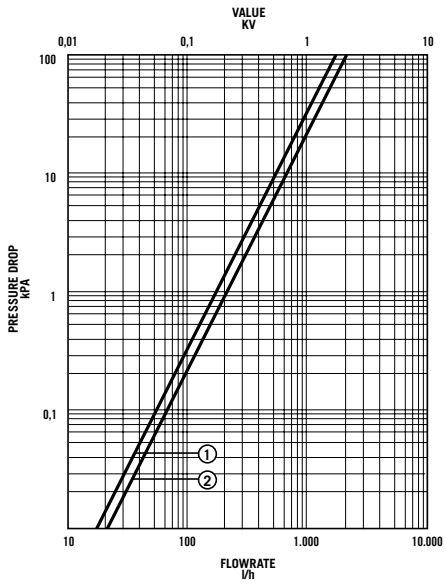

- ① Type 11 (K1)
- ② Type 22 (K2)