



50 Δt

(75/65/20°C)

K1**K2**

Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/h	Stelrad UIN	Heat output Watts	Heat output Btu/h
300	500	82301105	235	802	82302205	465	1587
	1000	82301110	469	1601	82302210	929	3171
	1500	82301115	704	2401	82302215	1394	4756
450	400	82451104	268	915	82452204	500	1705
	600	82451106	403	1376	82452206	750	2559
	800	82451108	537	1834	82452208	999	3410
	1000	82451110	672	2292	82452210	1249	4262
	1200	82451112	806	2751	82452212	1499	5114
	1400	82451114	941	3209	82452214	1749	5967
	1600	82451116	1075	3668	82452216	1999	6819
	1800	82451118	1209	4126	82452218	2248	7672
600	400	82601104	348	1188	82602204	640	2184
	600	82601106	522	1782	82602206	961	3280
	800	82601108	696	2375	82602208	1281	4372
	1000	82601110	870	2969	82602210	1601	5464
	1200	82601112	1044	3563	82602212	1921	6556
	1400	82601114	1218	4157	82602214	2242	7649
	1600	82601116	1392	4751	82602216	2563	8744
	1800	82601118	1566	5345	82602218	2883	9836
	2000	82601120	1740	5939	82602220	3203	10928


$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

See how a Stelrad Vita Deco is manufactured at www.stelrad.com


WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

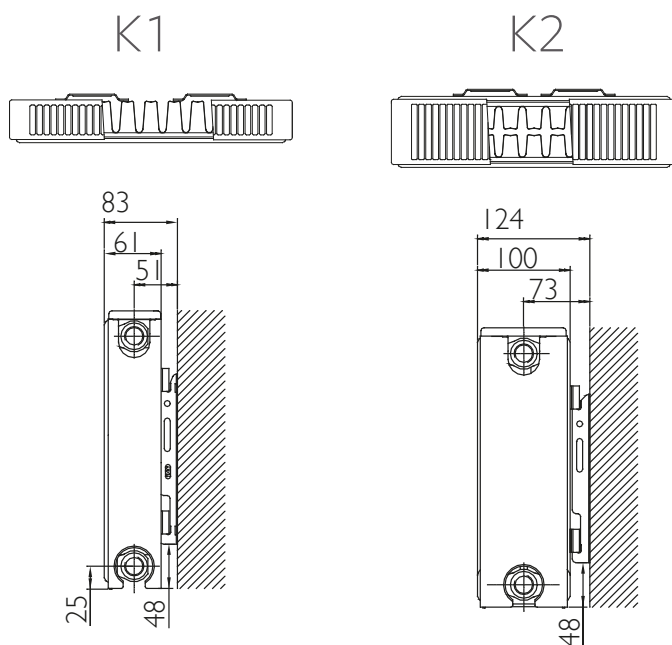

MOUNTING BRACKETS


All dimensions in mm. Inches in brackets. Floor mounting brackets available.

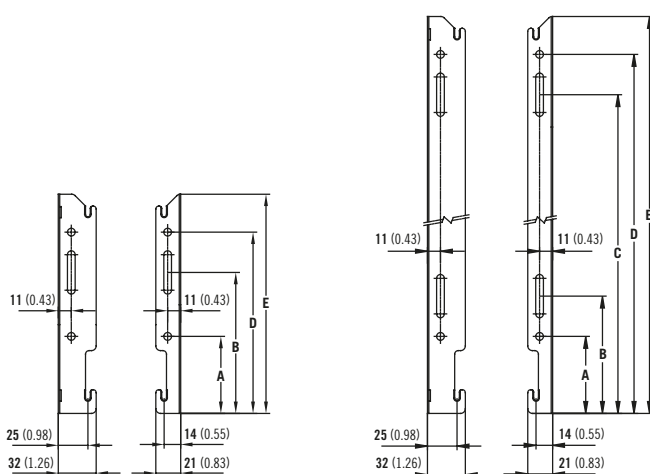

Dimensions	mm	inches	mm	inches	mm	inches
Height	300	11.81	450	17.72	600	23.62
A	65	2.56	65	2.56	65	2.56
B	119	4.69	99	3.90	99	3.90
C	-	-	269	10.59	419	16.50
D	153	6.02	303	11.93	453	17.83
E	185	7.28	335	13.19	485	19.09

K1 & K2 LUG POSITIONS (New as of June 2016).

All dimensions in mm. Inches in brackets.

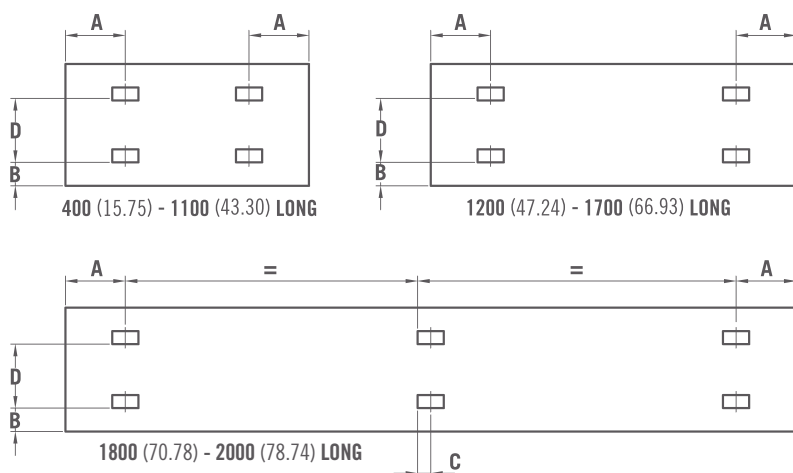


PANEL HEIGHT				D	K1			K2	
mm	in	mm	in		Dimensions	mm	in	mm	in
300	11.81	155	6.10		A 400mm	117	4.61	133	5.24
450	17.72	305	12.01		A 500 - 2000mm	150	5.91	133	5.24
600	23.62	455	17.91		B 400 - 2000mm	60	2.36	60	2.36
700	27.56	555	21.95		C 1800 - 2000mm	17	0.67	L/2	L/2

L/2 is the length divided by two.

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

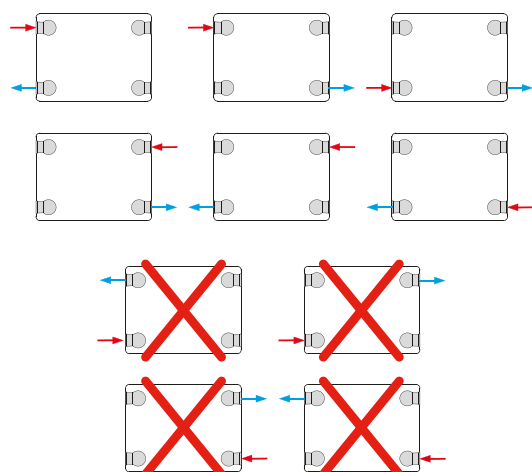

PRESSURE DROP

