



50 Δt
(75/65/20°C)

P+



K2



Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Heat output Watts	Btu/h	Stelrad UIN	Heat output Watts	Btu/h
545	500	470	400	-	-	-	83512204	410	1398
		670	600	-	-	-	83512206	614	2096
		870	800	-	-	-	83512208	819	2795
		1070	1000	-	-	-	83512210	1024	3494
		1270	1200	-	-	-	83512212	1229	4193
		1470	1400	-	-	-	83512214	1434	4892
		1670	1600	-	-	-	83512216	1638	5590
		1870	1800	-	-	-	83512218	1843	6289
645	600	2070	2000	-	-	-	83512220	2048	6988
		470	400	83612104	474	1616	83612204	640	2184
		670	600	83612106	710	2424	83612206	961	3280
		870	800	83612108	947	3232	83612208	1281	4372
		1070	1000	83612110	1184	4040	83612210	1601	5464
		1270	1200	83612112	1421	4848	83612212	1921	6556
		1470	1400	83612114	1658	5656	83612214	2242	7649
		1670	1600	83612116	1894	6464	83612216	2563	8744
		1870	1800	83612118	2131	7272	83612218	2883	9836
		2070	2000	83612120	2368	8080	83612220	3203	10928

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

VITA ULTRA TOWEL RAIL BAR



Fits emitter length	Stelrad UIN
400mm wide	83100004
600mm wide	83100006
800mm wide	83100008
1000mm wide	83100010

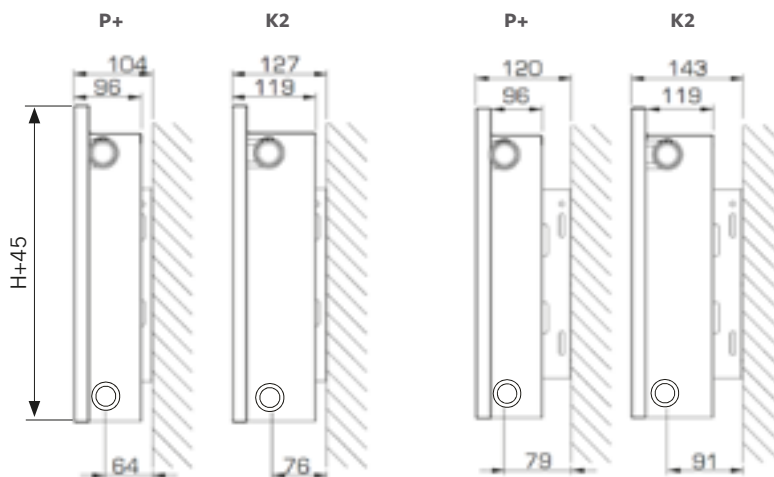
Towel rail bar is 120mm wider than actual radiator.
Maximum two towel rail bars per radiator.
For more information visit www.stelrad.com



Comes with a 2 year warranty.

WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.



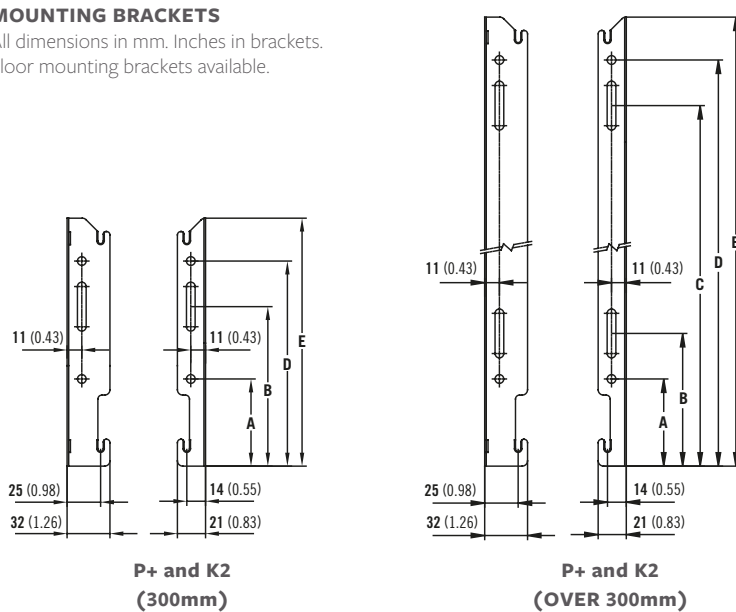
Mounting on short side of L-bracket

Mounting on long side of L-bracket

MOUNTING BRACKETS

All dimensions in mm. Inches in brackets.

Floor mounting brackets available.



**P+ and K2
(300mm)**

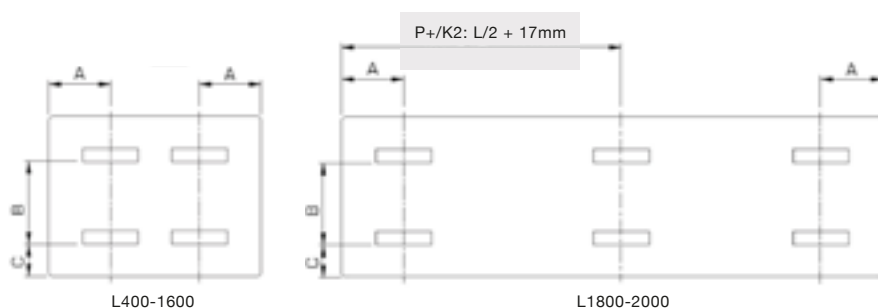
**P+ and K2
(OVER 300mm)**

P+ AND K2 (300mm)

Dimensions	mm	inches	mm	inches	mm	inches	mm	inches
Height	300	11.81	450	17.72	600	23.62	700	27.56
A	65	2.56	65	2.56	65	2.56	65	2.56
B	119	4.69	99	3.90	99	3.90	99	3.90
C	-	-	269	10.59	419	16.50	519	20.43
D	153	6.02	303	11.93	453	17.83	553	21.77
E	185	7.28	335	13.19	485	19.09	585	23.03

P+ AND K2 LUGS POSITIONS

All dimensions in mm. Inches in brackets.



Length	A	H	B	C
	P+/K2			
1200 - 1600	133	-	-	-
500 - 1100mm	133	500	305	60
1200 - 1600	133	600	455	60
1800 - 2000	133	-	-	-

Above positions are with respect to the edge of the emitter, not the front panel.

CONNECTIONS




Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442





Type	P+	K2
Height	600	500 600
W/m at 75/65/20	1184	1304 1498
n-coefficients	1.31	1.29 1.30
Heated surface area (m²/m)	5.24	6.33 7.74
Weight (kg/m)	34.80	32.73 38.80
Water contents (l/m)	6.80	5.83 6.90

COLOUR GUIDE





NATURAL COLOURS

						
NT110 Papyrus white	NT120 Pearl white	NT130 Champagne	NT140 Beige	NT150 Beige grey	NT160 Pebble grey	NT170 Quartz grey
						
SN110 Cream white	SN120 Cream	SN130 Mocca	SN140 Bordeaux	SN150 Sepia	SN160 Pale blue	SN170 Black

METALLIC COLOURS

						
ML110 Dove grey	ML120 Titanium grey	ML130 Blue grey	ML140 Granite	ML150 Cappuccino	ML160 Terra brown	ML170 Graphite black

RAL COLOURS

						
A1004 Golden yellow	A2003 Pastel orange	A3002 Carmine red	A3003 Robin red	A5002 Ultramarine blue	A6018 Yellow green	A7001 Silver grey
						
A7011 Iron grey	A7016 Anthracite grey	A7030 Stone grey	A7035 Light grey	A8017 Chocolate brown	A9003 Signal white	A9005 Jet black



RAL 9016**
Traffic white

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM

*Please note: when choosing a colour only the front fascia panel can be coloured, the emitter, top grille and panels are black.



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com