



50 Δt
(75/65/20°C)




| Height mm | Length mm | Stelrad UIN | Heat output | | Stelrad UIN | Heat output | |
|------------|-----------|-------------|-------------|----------|-------------|-------------|--------|
| | | | Watts | Btu/hr | | Watts | Btu/hr |
| 300 | 500 | 84301105 | 235 | 802 | 84302205 | 449 | 1532 |
| | 1000 | 84301110 | 470 | 1604 | 84302210 | 898 | 3064 |
| | 1500 | 84301115 | 705 | 2405 | 84302215 | 1347 | 4596 |
| 450 | 400 | 84451104 | 272 | 928 | 84452204 | 509 | 1737 |
| | 600 | 84451106 | 409 | 1396 | 84452206 | 764 | 2607 |
| | 700 | 84451107 | 477 | 1628 | 84452207 | 891 | 3040 |
| | 800 | 84451108 | 545 | 1860 | 84452208 | 1018 | 3473 |
| | 900 | 84451109 | 613 | 2092 | 84452209 | 1146 | 3910 |
| | 1000 | 84451110 | 681 | 2324 | 84452210 | 1273 | 4343 |
| | 1100 | 84451111 | 749 | 2556 | 84452211 | 1400 | 4777 |
| | 1200 | 84451112 | 817 | 2788 | 84452212 | 1528 | 5214 |
| | 1400 | 84451114 | 953 | 3252 | 84452214 | 1782 | 6080 |
| | 1600 | 84451116 | 1090 | 3719 | 84452216 | 2037 | 6950 |
| 1800 | 84451118 | 1226 | 4183 | 84452218 | 2291 | 7817 | |
| 600 | 400 | 84601104 | 348 | 1187 | 84602204 | 640 | 2184 |
| | 600 | 84601106 | 522 | 1781 | 84602206 | 961 | 3279 |
| | 700 | 84601107 | 609 | 2078 | 84602207 | 1121 | 3825 |
| | 800 | 84601108 | 696 | 2375 | 84602208 | 1281 | 4371 |
| | 900 | 84601109 | 783 | 2672 | 84602209 | 1441 | 4917 |
| | 1000 | 84601110 | 870 | 2968 | 84602210 | 1601 | 5463 |
| | 1100 | 84601111 | 957 | 3265 | 84602211 | 1761 | 6009 |
| | 1200 | 84601112 | 1044 | 3562 | 84602212 | 1921 | 6554 |
| | 1400 | 84601114 | 1218 | 4156 | 84602214 | 2241 | 7646 |
| | 1600 | 84601116 | 1392 | 4750 | 84602216 | 2562 | 8742 |
| | 1800 | 84601118 | 1566 | 5343 | 84602218 | 2882 | 9833 |
| | 2000 | 84601120 | 1740 | 5937 | 84602220 | 3202 | 10925 |

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

SOFTLINE DECO

Softline Series

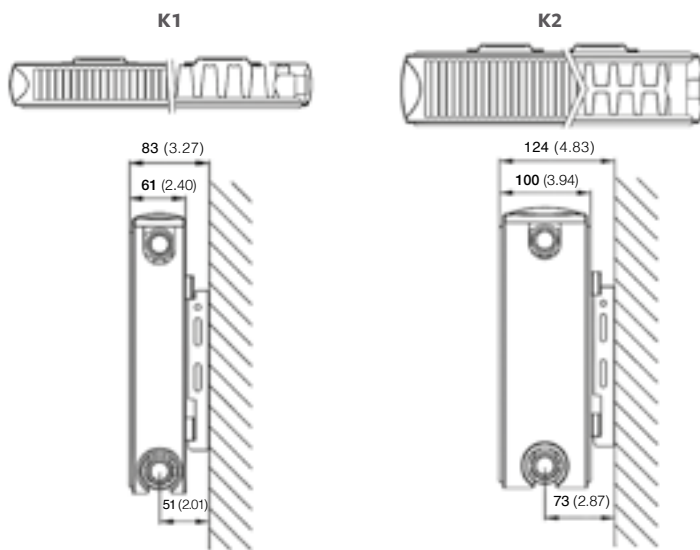

K1 & K2 LUG POSITIONS (New as of June 2016).
All dimensions in mm. Inches in brackets.

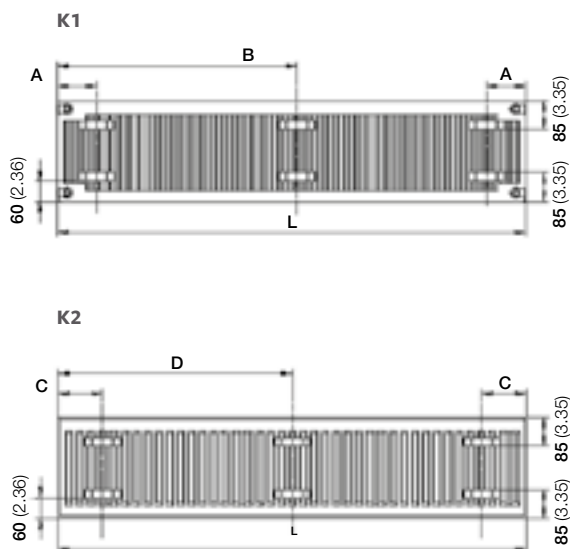

| L | K1 | | | | K2 | | | |
|-------------|-----|------|------------|----|-----|------|-----|----|
| | A | | B | | C | | D | |
| | mm | in | mm | in | mm | in | mm | in |
| 400 | 117 | 4.60 | - | - | 133 | 5.24 | - | - |
| 500 - 1100 | 150 | 5.90 | - | - | 133 | 5.24 | - | - |
| 1200 - 1600 | 150 | 5.90 | - | - | 133 | 5.24 | - | - |
| 1800 - 2000 | 150 | 5.90 | (L/2) + 17 | | 133 | 5.24 | L/2 | |


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

SOFTLINE DECO

Softline Series

PIPING OPTIONS

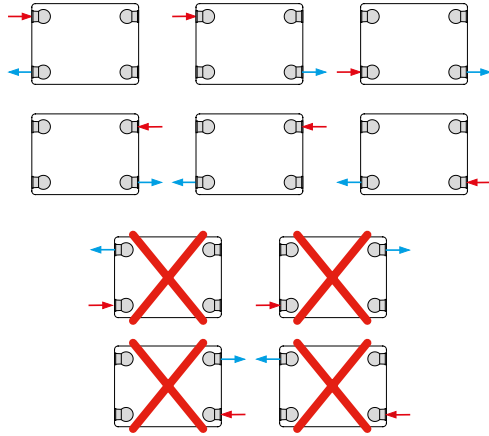

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

| Type | K1 | | | K2 | | |
|---|-------|-------|-------|-------|-------|-------|
| | 300 | 450 | 600 | 300 | 450 | 600 |
| Height | 300 | 450 | 600 | 300 | 450 | 600 |
| W/m at 75/65/20 | 470 | 681 | 870 | 898 | 1273 | 1601 |
| n-coefficients | 1.26 | 1.27 | 1.28 | 1.30 | 1.30 | 1.31 |
| Heated surface area (m ² /m) | 2.09 | 3.37 | 4.66 | 3.51 | 5.62 | 7.74 |
| Weight (kg/m) | 14.13 | 18.22 | 24.27 | 19.30 | 28.85 | 38.40 |
| Water contents (l/m) | 1.81 | 2.53 | 3.23 | 3.10 | 4.65 | 6.20 |
| Wall to tap Centre (mm) | 51 | 51 | 51 | 73 | 73 | 73 |

PRESSURE DROPS

