



COMPACT WITH STYLE

VERTICAL

Designer Series

50 Δt

(75/65/20°C)

P2



K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1600	300	9	148140	693	2365	-	-	-
	500	15	148148	1155	3942	-	-	-
	600	18	148152	1386	4730	-	-	-
1800	300	9	148141	760	2594	-	-	-
	400	12	148145	1013	3459	32182204	1476	5036
	500	15	148149	1266	4321	32182205	1845	6295
	600	18	148153	1519	5184	32182206	2214	7554
	700	21	-	-	-	32182207	2583	8813
2000	300	9	148142	824	2812	-	-	-
	400	12	148146	1099	3750	32202204	1588	5405
	500	15	148150	1374	4689	32202205	1980	6756
	600	18	148154	1649	5628	32202206	2376	8107
	700	21	-	-	-	32202207	2772	9458
2200	300	9	148143	887	3027	32222203	1269	4330
	400	12	148147	1183	4036	32222204	1692	5773
	500	15	148151	1479	5048	32222205	2115	7216
	600	18	148155	1775	6058	32222206	2538	8660

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00




COMPACT WITH STYLE

VERTICAL

Designer Series


WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

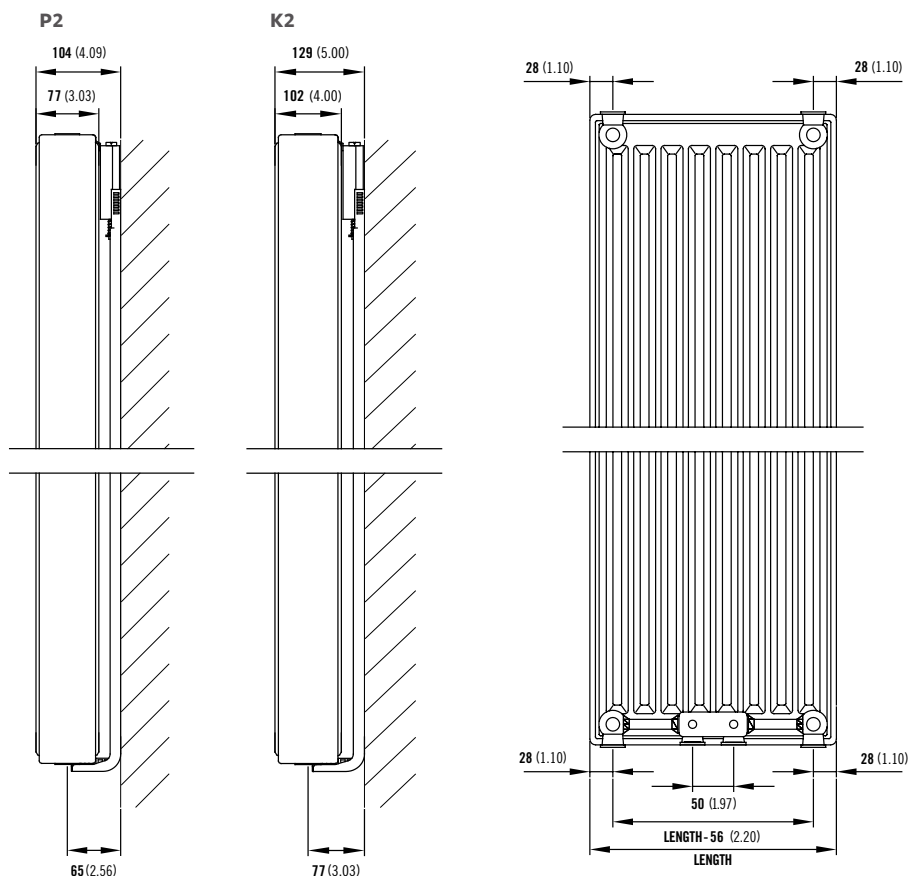

MOUNTED BRACKETS

Height	H2		H3		H4	
	mm	inches	mm	inches	mm	inches
1600	63	2.48	730	28.74	1390	54.72
1800	70.90	2.79	830	32.68	1590	62.60
2000	78.70	3.10	930	36.61	1790	70.48
2200	86.60	3.41	1030	40.55	1990	78.35




COMPACT WITH STYLE

VERTICAL

Designer Series


PIPING OPTIONS

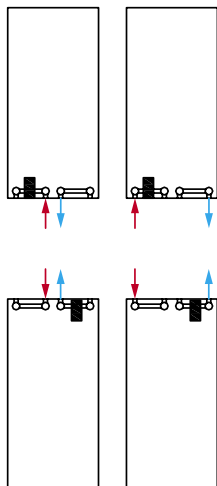

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	P2				K2			
Height	1600	1800	2000	2200	1600	1800	2000	2200
W/m at 75/65/20	2310	2532	2748	2958	3420	3690	3960	4230
n-coefficients	1.27	1.27	1.27	1.27	1.32	1.32	1.33	1.33
Heated surface area (m ² /m)	7.33	8.25	9.17	10.09	28.99	29.90	37.74	38.66
Weight (kg/m)	77.70	86.70	95.40	105.60	94.20	105.30	116.40	126.60
Water contents (l/m)	14.10	16.20	18.30	20.10	14.10	15.90	17.70	20.10
Wall to tap centre (mm)	65	65	65	65	77	77	77	77

PRESSURE DROPS

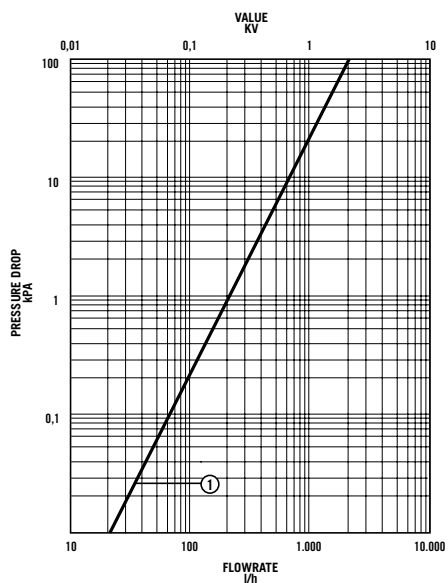

① Type P2 & K2


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


COLOUR GUIDE

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

Natural Colours



NT110
Papyrus white



NT120
Pearl white



NT130
Champagne



NT140
Beige



NT150
Beige grey



NT160
Pebble grey



NT170
Quartz grey



SN110
Cream white



SN120
Cream



SN130
Mocca



SN140
Bordeaux



SN150
Sepia



SN160
Pale blue



SN170
Black

Metallic Colours



ML110
Dove grey



ML120
Titanium grey



ML130
Blue grey



ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL Colours



A1004
Golden yellow



A2003
Pastel orange



A3002
Carmine red



A3003
Robin red



A5002
Ultramarine blue



A6018
Yellow green



A7001
Silver grey




A7011
Iron grey



A7016
Anthracite grey




A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white




A9005
Jet black



RAL 9016*
Traffic white

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM



RAL 9016*
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com