



50 Δt

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
755	450	407501450	389	1327	£280.86	£337.03
	500	407501500	431	1471	£287.08	£344.50
	600	407501600	517	1764	£299.50	£359.40
	750	407501750	645	2201	£322.81	£387.37
1199	450	401101450	615	2098	£324.56	£389.47
	500	401101500	675	2303	£333.61	£400.33
	600	401101600	794	2709	£351.48	£421.78
	750	401101750	972	3316	£383.74	£460.49
1791	450	401701450	900	3071	£382.38	£458.86
	500	401701500	986	3364	£395.44	£474.53
	600	401701600	1158	3951	£429.19	£515.03
	750	401701750	1416	4831	£474.96	£569.95
2013	450	402001450	1002	3419	£405.14	£486.17
	500	402001500	1099	3750	£427.61	£513.13
	600	402001600	1294	4415	£457.28	£548.74
	750	402001750	1586	5411	£508.63	£610.36


STRAIGHT DOUBLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
755	450	407502450	552	1883	£356.09	£427.31
	500	407502500	616	2102	£366.89	£440.27
	600	407502600	748	2552	£388.81	£466.57
	750	407502750	947	3231	£426.75	£512.10
1199	450	401102450	868	2962	£429.97	£515.96
	500	401102500	963	3286	£456.34	£547.61
	600	401102600	1154	3937	£489.43	£587.32
	750	401102750	1441	4917	£544.90	£653.88
1791	450	401702450	1268	4326	£536.94	£644.33
	500	401702500	1402	4784	£562.64	£675.17
	600	401702600	1670	5698	£610.50	£732.60
	750	401702750	2073	7073	£716.18	£859.42
2013	450	402002450	1427	4869	£577.94	£693.53
	500	402002500	1576	5377	£606.67	£728.00
	600	402002600	1874	6394	£687.34	£824.81
	750	402002750	2321	7919	£775.54	£930.65

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


CENTRE TAP TRV



UIN	Elements	Price excl VAT	Price incl VAT
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM	£52.65	£63.18
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN	£52.65	£63.18
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM	£52.65	£63.18
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM	£52.65	£63.18
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN	£52.65	£63.18
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM	£52.65	£63.18
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM	£52.65	£63.18
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN	£52.65	£63.18
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM	£52.65	£63.18
14531610	CENTRE TAP TRV ANGLED L CHROME -10MM	£52.65	£63.18
14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN	£52.65	£63.18
14531615	CENTRE TAP TRV ANGLED L CHROME -15MM	£52.65	£63.18
14531710	CENTRE TAP TRV ANGLED R WHITE -10MM	£52.65	£63.18
14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN	£52.65	£63.18
14531715	CENTRE TAP TRV ANGLED R WHITE -15MM	£52.65	£63.18
14531810	CENTRE TAP TRV ANGLED R CHROME -10MM	£52.65	£63.18
14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN	£52.65	£63.18
14531815	CENTRE TAP TRV ANGLED R CHROME -15MM	£52.65	£63.18


SINGLE WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

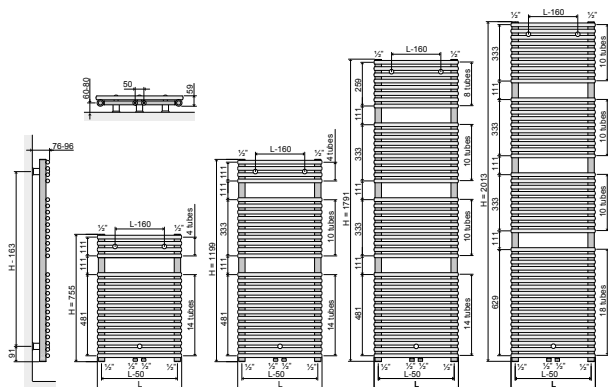

DOUBLE WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

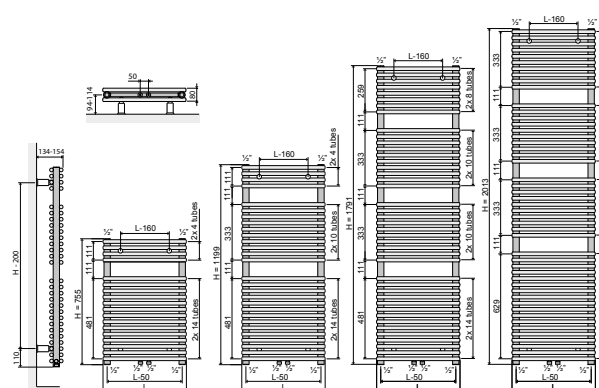


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING OPTIONS

Single and Double.

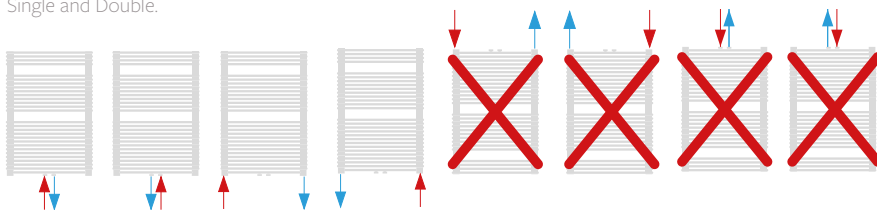

Piping options: BBOE (Bottom, Bottom, Opposite, End)

TAPPING CENTRES



EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

SINGLE


Type																
Tube Quantity	18	18	18	18	28	28	28	28	42	42	42	42	48	48	48	48
Height	755	755	755	755	1199	1199	1199	1199	1791	1791	1791	1791	2013	2013	2013	2013
Length	450	500	600	750	450	500	600	750	450	500	600	750	450	500	600	750
W/m at 75/65/20	389	431	517	645	615	675	794	972	900	986	1158	1416	1002	1099	1294	1586
n-coefficients	1.18	1.17	1.15	1.13	1.21	1.20	1.19	1.17	1.24	1.23	1.21	1.17	1.26	1.24	1.21	1.17
Heated surface area (m²/m)	0.75	0.82	0.94	1.13	1.18	1.28	1.47	1.76	1.77	1.91	2.20	2.64	2.01	2.18	2.51	3.01
Weight (kg/m)	6.80	7.40	8.50	10.20	10.90	11.80	13.50	16.10	17.30	18.60	21.30	25.20	18.90	20.40	23.40	27.80
Water contents (l/m)	3.70	4.00	4.50	5.30	5.90	6.30	7.10	8.30	9.10	9.70	11.00	12.90	10.00	10.70	12.00	14.10

DOUBLE

Type																
Tube Quantity	2x17	2x17	2x17	2x17	2x27	2x27	2x27	2x27	2x41	2x41	2x41	2x41	2x47	2x47	2x47	2x47
Height	755	755	755	755	1199	1199	1199	1199	1791	1791	1791	1791	2013	2013	2013	2013
Length	450	500	600	750	450	500	600	750	450	500	600	750	450	500	600	750
W/m at 75/65/20	565	626	749	934	868	963	1154	1441	1269	1402	1670	2073	1427	1576	1874	2321
n-coefficients	1.21	1.21	1.20	1.19	1.23	1.23	1.22	1.21	1.25	1.24	1.23	1.20	1.25	1.24	1.23	1.21
Heated surface area (m²/m)	1.33	1.45	1.70	2.07	2.07	2.26	2.65	3.23	3.10	3.39	3.97	4.85	3.54	3.87	4.53	5.53
Weight (kg/m)	12.47	13.59	15.82	19.17	19.40	21.14	24.61	29.82	29.15	31.75	36.94	44.72	33.20	36.14	42.01	50.82
Water contents (l/m)	6.62	7.19	8.32	10.02	10.30	11.18	12.95	15.59	15.32	16.62	19.23	23.13	17.60	19.11	22.13	26.65
Km	4.91	5.54	6.86	9.00	6.97	7.87	9.77	12.84	9.54	10.84	13.64	18.38	10.66	12.10	15.21	20.48

COLOUR GUIDE

NATURAL COLOURS

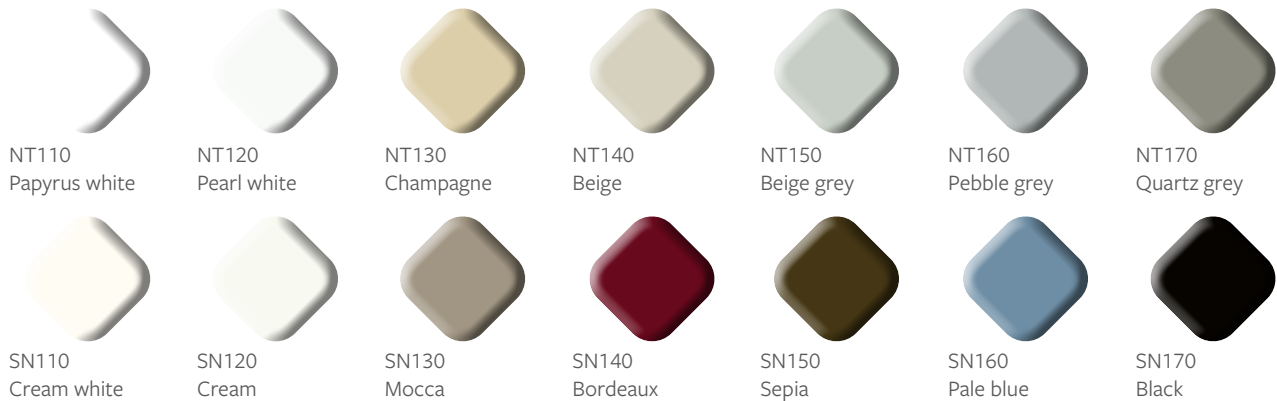

METALLIC COLOURS



RAL COLOURS



FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM

*Please note: when choosing a colour only the front fascia panel can be coloured, the emitter, top grille and panels are black.



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com