



CONCORD SLIMLINE

Designer Series

50 Δt

(75/65/20°C)

| Height mm | Length mm | Elements | Stelrad UIN | Watts | Heat output Btu/hr |
|--------------|--------------|----------|----------------|-------|-----------------------|
| 1800 | 320 | 8 | 148300 | 872 | 2975 |
| | 440 | 11 | 148301 | 1199 | 4091 |
| | 520 | 13 | 148302 | 1417 | 4835 |
| | 640 | 16 | 148303 | 1744 | 5951 |
| 2000 | 320 | 8 | 148304 | 978 | 3337 |
| | 440 | 11 | 148305 | 1344 | 4586 |
| | 520 | 13 | 148306 | 1589 | 5422 |
| | 640 | 16 | 148307 | 1956 | 6674 |

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


CONCORD SLIMLINE

Designer Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

| Type | Back face to finished wall D | | Connection centres from finished wall D1 | | Front face from finished wall D2 | |
|----------|---------------------------------|--------|---|--------|-------------------------------------|--------|
| | mm | inches | mm | inches | mm | inches |
| Slimline | 35 | 1.38 | 50 | 1.97 | 130 | 5.12 |

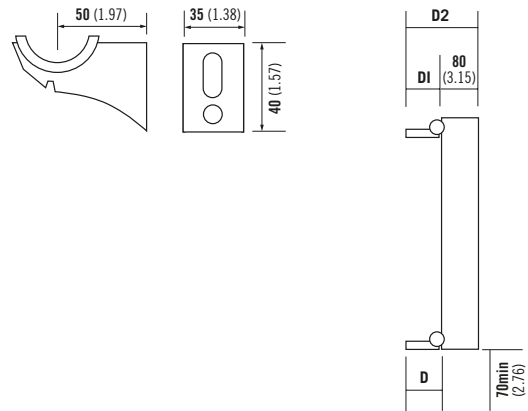


FIXING POSITIONS

All dimensions in mm. Inches in brackets.



PIPING INSTRUCTIONS



CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

| Type | Slimline | |
|---|----------|-------|
| | Height | 1800 |
| W/m at 75/65/20 | 2725 | 3056 |
| n-coefficients | 1.30 | 1.31 |
| Heated surface area (m ² /m) | 6.90 | 7.65 |
| Weight (kg/m) | 77.81 | 78.50 |
| Water contents (l/m) | 17.50 | 19.25 |
| Wall to tap centre (mm) | 50 | 50 |

STEEL THICKNESS 1.5mm

COLOUR GUIDE

RAL COLOURS

| | | | | | | |
|---|---|---|---|---|--|--|
|  |  |  |  |  |  |  |
| RAL 7035 Pale grey | RAL 7038 Agate grey | RAL 7036 Platinum grey | RAL 7030 Stone grey | RAL 7037 Dusty grey | RAL 7015 Slate grey | RAL 9005* Jet black |
|  |  |  |  |  |  |  |
| RAL 8017 Chocolate brown | RAL 1016 Sulphur yellow | RAL 1021 Cadmium yellow | RAL 1004 Dark Golden yellow | RAL 2008 Light red orange | RAL 3000 Flame red | RAL 3003 Ruby red |
|  |  |  |  |  |  |  |
| RAL 3005 Wine red | RAL 6027 Light green | RAL 6034 Pastel turquoise | RAL 6019 Pastel green | RAL 6033 Turquoise blue | RAL 6020 Chrome green | RAL 6005 Light moss green |
|  |  |  |  |  |  |  |
| RAL 5014 Pigeon blue | RAL 5002 Ultramarine blue | RAL 5024 Pastel blue | RAL 5022 Night blue | RAL 5010 Gentian blue | RAL 9016** Traffic white | RAL 9010 Pure white |
|  |  |  |  | | | |
| RAL 9001 Cream | RAL 1013 Pearl white | RAL 1015 Light ivory | RAL 9002 Grey white | | | |

Metallic Colours

| | | |
|---|---|---|
|  |  |  |
| BR002 Metallic silver | BR 0004 Gilded aluminium | BR 0007 Satin metal grey |

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM

*Please note: when choosing a colour only the front fascia panel can be coloured, the emitter, top grille and panels are black.



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com