


50 Δt

(75/65/20°C)






Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	459	65	147635	858	2928	£368.10	£441.72
	689	65	147670	1287	4393	£477.89	£573.47
2000	459	65	147705	954	3256	£382.21	£458.65
	689	65	147740	1431	4884	£496.10	£595.32
	765	65	147775	1590	5427	£533.90	£640.68



Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	459	65	147810	858	2928	£415.00	£498.00
	689	65	147845	1287	4393	£524.36	£629.23
2000	459	65	147880	954	3256	£429.50	£515.40
	689	65	147915	1431	4884	£543.38	£652.06
	765	65	147950	1590	5427	£580.43	£696.52


Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

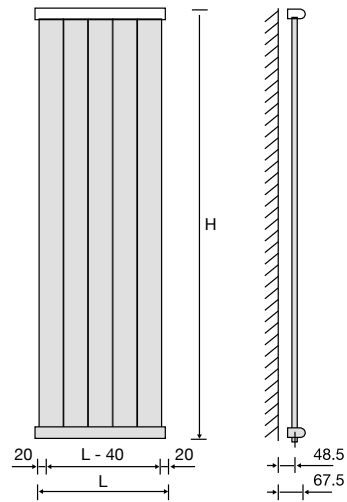

All dimensions in mm.


BRACKETS POSITION



TAPPING CENTRE FOR THE ELLIPSE


L - 40mm perpendicular to the manifold

H - 22mm (± 2 mm) In line with the manifold
* coupling protrudes 10mm



STANDARD FITTING

EG $\phi 1/2"$



CONNECTIONS

Each radiator comes with $1/2"$ inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	ELLIPSE EH INWARD					ELLIPSE EOH ALTERNATE				
	EH					EOH				
Height	1800	1800	2000	2000	2000	1800	1800	2000	2000	2000
Length	459	689	459	689	765	459	689	459	689	765
Btu/hr	2928	4392	3256	4884	5426	2928	4392	3256	4884	5426
Watts	858	1287	954	1431	1590	858	1287	954	1431	1590
Tapping centres (mm)	419	649	419	649	725	419	649	419	649	725
Centres from wall (mm)	46	46	46	46	46	46	46	46	46	46
Max. projection (mm)	65	65	65	65	65	65	65	65	65	65
Weight (kg/m)	17	22	26	19	29	17	22	26	19	29
Water contents (l/m)	4.60	6.90	5.07	7.61	8.45	4.60	6.90	5.07	7.61	8.45

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

RAL COLOURS

						
RAL 7035 Pale grey	RAL 7038 Agate grey	RAL 7036 Platinum grey	RAL 7030 Stone grey	RAL 7037 Dusty grey	RAL 7015 Slate grey	RAL 9005* Jet black
						
RAL 8017 Chocolate brown	RAL 1016 Sulphur yellow	RAL 1021 Cadmium yellow	RAL 1004 Dark Golden yellow	RAL 2008 Light red orange	RAL 3000 Flame red	RAL 3003 Ruby red
						
RAL 3005 Wine red	RAL 6027 Light green	RAL 6034 Pastel turquoise	RAL 6019 Pastel green	RAL 6033 Turquoise blue	RAL 6020 Chrome green	RAL 6005 Light moss green
						
RAL 5014 Pigeon blue	RAL 5002 Ultramarine blue	RAL 5024 Pastel blue	RAL 5022 Night blue	RAL 5010 Gentian blue	RAL 9016** Traffic white	RAL 9010† Pure white
						
RAL 9001 Cream	RAL 1013 Pearl white	RAL 1015 Light ivory	RAL 9002 Grey white			

Metallic Colours

		
2765G Metallic silver	BR 0004 Gilded aluminium	BR 0007*** Satin metal grey

Where indicated products are only available in this colour: *Excel **Standard white ***Arc, Wave, Optia.
Where indicated products come as standard in RAL 9010 Pure White: †Esprit, Vistaline & Ellipse.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM



RAL 9016*
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com