

50 Δt


(75/65/20°C)

WALL MOUNTED


Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	380	60	147040	727	2481	£700.28	£840.34
	500	60	147075	957	3266	£806.33	£967.60
2000	500	60	147110	1048	3577	£876.49	£1,051.79

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

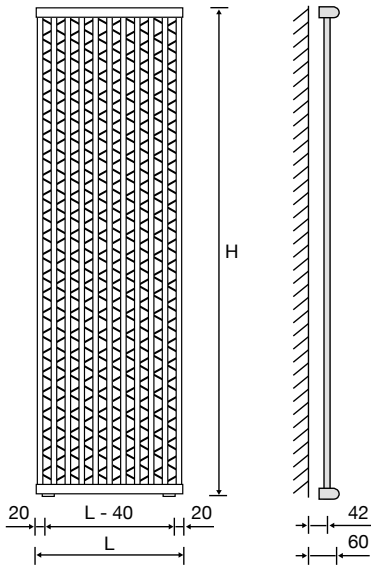

All dimensions in mm.

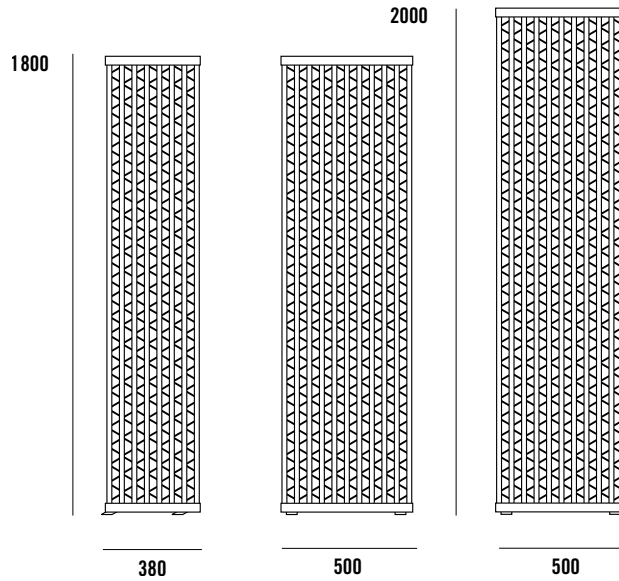

BRACKETS POSITION

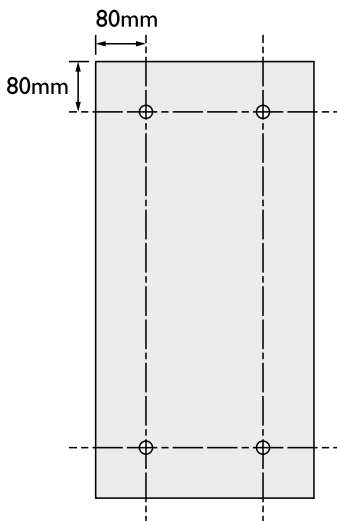

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Wall Mounted		
	1800	1800	2000
Height	1800	1800	2000
Length	380	500	500
Btu/hr	2481	3167	3577
Watts	727	957	1048
Tapping centres (mm)	340	460	460
Centres from wall (mm)	42	42	42
Max. projection (mm)	60	60	60
Weight (kg/m)	10	13	14
Water contents (l/m)	1.83	2.41	2.68

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.