



SOFTLINE SILHOUETTE

Softline Series

50 Δt

(75/65/20°C)

K1



K2




Height mm	Length mm	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
			Watts	Btu/hr				Watts	Btu/hr		
300	500	88301105	235	802	£30.79	£36.95	88302205	449	1532	£45.91	£55.09
	1000	88301110	470	1604	£50.25	£60.30	88302210	898	3064	£79.88	£95.86
	1500	88301115	705	2405	£71.48	£85.78	88302215	1347	4596	£122.72	£147.26
450	400	88451104	272	928	£33.28	£39.94	88452204	509	1737	£49.96	£59.95
	600	88451106	409	1396	£38.48	£46.18	88452206	764	2607	£64.23	£77.08
	800	88451108	545	1860	£48.90	£58.68	88452208	1018	3473	£74.20	£89.04
	1000	88451110	681	2324	£61.12	£73.34	88452210	1273	4343	£85.63	£102.76
	1200	88451112	817	2788	£73.35	£88.02	88452212	1528	5214	£102.76	£123.31
	1400	88451114	953	3252	£85.59	£102.71	88452214	1782	6080	£132.37	£158.84
	1600	88451116	1090	3719	£97.81	£117.37	88452216	2037	6950	£151.28	£181.54
600	1800	88451118	1226	4183	£119.46	£143.35	88452218	2291	7817	£170.21	£204.25
	400	88601104	348	1187	£35.36	£42.43	88602204	640	2184	£54.50	£65.40
	600	88601106	522	1781	£42.64	£51.17	88602206	961	3279	£70.05	£84.06
	800	88601108	696	2375	£53.34	£64.01	88602208	1281	4371	£80.97	£97.16
	1000	88601110	870	2968	£66.68	£80.02	88602210	1601	5463	£93.43	£112.12
	1200	88601112	1044	3562	£80.02	£96.02	88602212	1921	6554	£112.09	£134.51
	1400	88601114	1218	4156	£93.36	£112.03	88602214	2241	7646	£144.42	£173.30
	1600	88601116	1392	4750	£106.70	£128.04	88602216	2562	8742	£165.04	£198.05
	1800	88601118	1566	5343	£130.31	£156.37	88602218	2882	9833	£185.66	£222.79
2000	88601120	1740	5937	£133.67	£160.40	88602220	3202	10925	£284.16	£340.99	

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


SOFTLINE SILHOUETTE

Softline Series

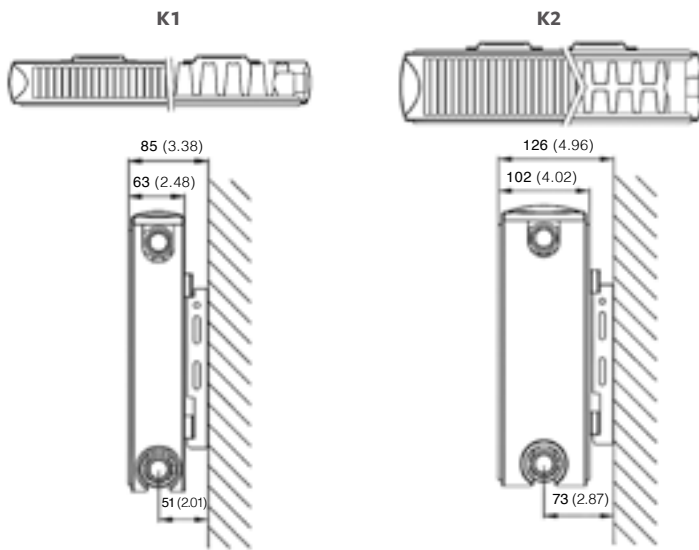

K1 & K2 LUG POSITIONS

All dimensions in mm. Inches in brackets.

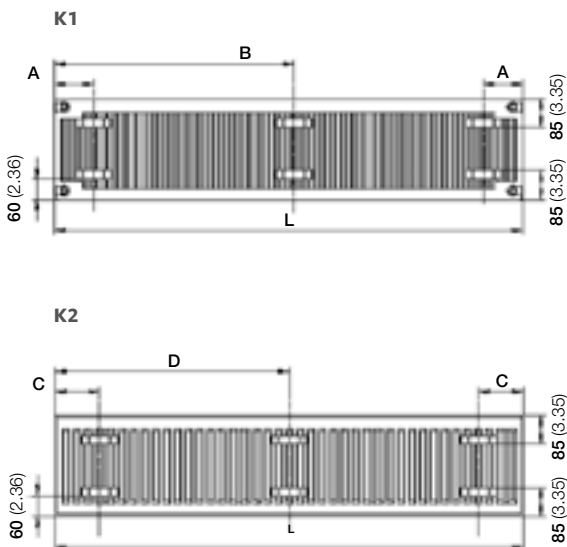

L	K1				K2			
	A		B		C		D	
	mm	in	mm	in	mm	in	mm	in
400	117	4.60	-	-	133	5.24	-	-
500 - 1100	150	5.90	-	-	133	5.24	-	-
1200 - 1600	150	5.90	-	-	133	5.24	-	-
1800 - 2000	150	5.90	(L/2) + 17		133	5.24	L/2	


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

SOFTLINE SILHOUETTE

Softline Series

PIPING OPTIONS

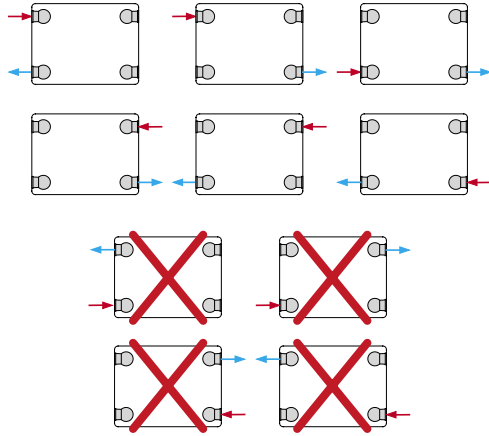

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1			K2		
	300	450	600	300	450	600
Height	300	450	600	300	450	600
W/m at 75/65/20	470	681	870	898	1273	1601
n-coefficients	1.26	1.27	1.28	1.30	1.30	1.31
Heated surface area (m ² /m)	2.09	3.37	4.66	3.51	5.62	7.74
Weight (kg/m)	14.13	18.22	24.27	19.30	28.85	38.40
Water contents (l/m)	1.81	2.53	3.23	3.10	4.65	6.20
Wall to tap Centre (mm)	51	51	51	73	73	73

PRESSURE DROPS

