



50 Δt

(75/65/20°C)

P+

K2

Height mm	Emitter Length mm	Casing Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Emitter Length mm	Casing Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1820	400	504	38418210	1224	4176	400	527	38418220	1476	5036
	500	604	38518210	1530	5220	500	627	38518220	1845	6295
	600	704	38618210	1836	6264	600	727	38618220	2214	7554
2020	400	504	38420210	1308	4463	400	527	38420220	1584	5405
	500	604	38520210	1635	5579	500	627	38520220	1980	6756
	600	704	38620210	1962	6694	600	727	38620220	2376	8107

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE


Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00





L - P+ mm	L - K2 mm	L _H mm
504	527	344
604	627	444
704	727	70


MOUNTING BRACKETS

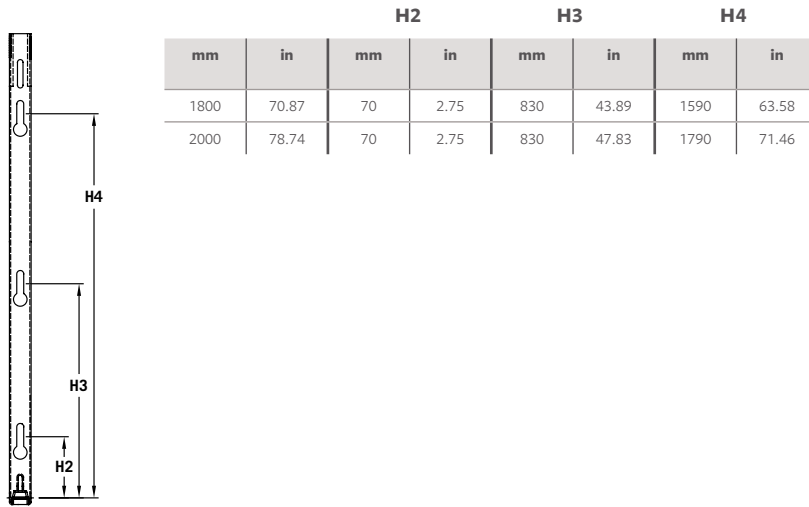

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.


PIPING OPTIONS

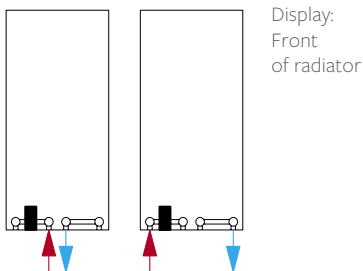

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	P+		K2	
Height	1820	2020	1820	2020
W/m at 75/65/20	3060	3270	3690	3960
n-coefficients	1.30	1.30	1.33	1.33
Heated surface area (m²/m)	13.58	16.20	29.90	37.74
Weight (kg/m)	96.00	106.20	105.30	116.40
Water contents (l/m)	15.90	17.70	15.90	17.70
Wall to tap centre (mm)	65	65	77	77


PRESSURE DROPS

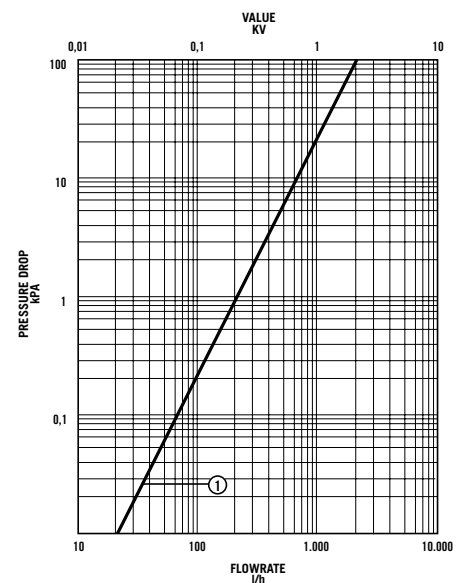


COLOUR GUIDE

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

Natural Colours



NT110
Papyrus white



NT120
Pearl white



NT130
Champagne



NT140
Beige



NT150
Beige grey



NT160
Pebble grey



NT170
Quartz grey



SN110
Cream white



SN120
Cream



SN130
Mocca



SN140
Bordeaux



SN150
Sepia



SN160
Pale blue



SN170
Black

Metallic Colours



ML110
Dove grey



ML120
Titanium grey



ML130
Blue grey



ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL Colours



A1004
Golden yellow



A2003
Pastel orange



A3002
Carmine red



A3003
Robin red



A5002
Ultramarine blue



A6018
Yellow green



A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey




A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white




A9005
Jet black



RAL 9016*
Traffic white

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM



RAL 9016*
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com