



VITA COLUMN HORIZONTAL

Vita Series

50 Δt

(75/65/20°C)

2 COLUMN

Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
500	628	463012	499	1,703	£132.22	£158.66
	858	463013	691	2,358	£165.28	£198.34
	1042	463014	845	2,884	£209.38	£251.26
	1272	463015	1,037	3,539	£252.65	£303.19
600	628	463028	589	2,010	£145.44	£174.53
	858	463029	815	2,782	£165.28	£198.34
	1042	463030	997	3,403	£211.55	£253.86
	1272	463031	1,223	4,174	£271.03	£325.24

3 COLUMN

4 COLUMN

Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
300	444	463000	288	983	£116.87	£140.24
	628	463001	416	1,420	£150.33	£180.40
	858	463002	576	1,966	£198.32	£237.98
	1042	463003	704	2,403	£231.38	£277.66
	1272	463004	864	2,949	£276.20	£331.44
	1456	463005	992	3,386	£323.12	£387.74
	1870	463006	1,280	4,369	£420.46	£504.55
500	444	463016	464	1,584	£125.00	£150.00
	628	463017	671	2,290	£145.44	£174.53
	858	463018	929	3,171	£178.48	£214.18
	1042	463019	1,135	3,874	£244.60	£293.52
	1272	463020	1,393	4,754	£323.93	£388.72
	1456	463021	1,600	5,461	£341.06	£409.27
	1870	463022	2,064	7,044	£417.06	£500.47
600	444	463032	548	1,870	£148.93	£178.72
	628	463033	792	2,703	£158.65	£190.38
	858	463034	1,096	3,741	£185.10	£222.12
	1042	463035	1,340	4,573	£211.55	£253.86
	1272	463036	1,644	5,611	£284.26	£341.11
	1456	463037	1,888	6,444	£333.13	£399.76
	1870	463038	2,436	8,314	£433.83	£520.60
750	858	463044	1,337	4,563	£236.96	£284.35
	1042	463045	1,635	5,580	£295.97	£355.16
	1272	463046	2,006	6,846	£354.00	£424.80
	1456	463047	2,303	7,860	£413.00	£495.60
	1870	463048	2,972	10,143	£531.00	£637.20
4 COLUMN	444	463007	377	1,287	£150.59	£180.71
	628	463008	545	1,860	£169.11	£202.93
	858	463009	754	2,573	£211.84	£254.21
	1042	463010	922	3,147	£268.40	£322.08
	1272	463011	1,131	3,860	£321.02	£385.22
	-	-	-	-	-	-
	-	-	-	-	-	-
4 COLUMN	444	463023	608	2,075	£155.01	£186.01
	628	463024	879	3,000	£162.98	£195.58
	858	463025	1,217	4,154	£205.17	£246.20
	1042	463026	1,487	5,075	£261.45	£313.74
	1272	463027	1,825	6,229	£323.93	£388.72
	-	-	-	-	-	-
	-	-	-	-	-	-
4 COLUMN	444	463039	718	2,451	£155.26	£186.31
	628	463040	1,037	3,539	£165.28	£198.34
	858	463041	1,436	4,901	£211.55	£253.86
	1042	463042	1,756	5,993	£271.03	£325.24
	1272	463043	2,155	7,355	£323.93	£388.72
	-	-	-	-	-	-
	-	-	-	-	-	-
4 COLUMN	444	463049	877	2,993	£183.32	£219.98
	628	463050	1,266	4,321	£258.35	£310.02
	858	463051	1,753	5,983	£270.83	£325.00
	1042	463052	2,143	7,314	£318.81	£382.57
	1272	463053	2,630	8,976	£399.08	£478.90

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

VITA COLUMN HORIZONTAL

Vita Series

VITA COLUMN HORIZONTAL FLOOR MOUNTING BRACKETS




UIN 148137 White
(sold in pairs)

FLOOR MOUNTING BRACKET INFORMATION

400 - 1500mm	2 feet
--------------	--------


OPTIONAL FLOOR MOUNTING BRACKETS

All dimensions in mm. Inches in brackets.

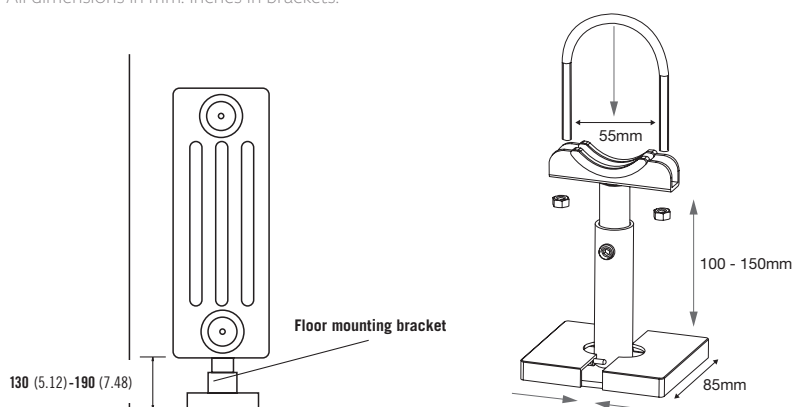

BRACKET INSTALLATION

All dimensions in mm. Inches in brackets.

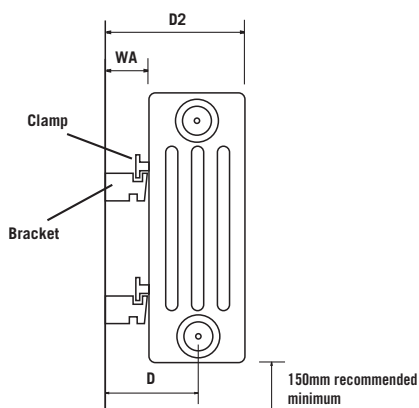

MEASUREMENTS USING 10mm CVD BRACKETS SLOT

Add 5mm if using 15mm slot

	WA	D	D2
2 Col	23	54	85
3 Col	23	73	123
4 Col	23	91	159

BRACKETS AND CLAMPS REQUIRED

	No of Sections
4	0 - 23
6	24 - 41

Number of columns	Wall to centre of connections		Wall to front face of radiator
	Using 10mm bracket slot	Using 15mm bracket slot	
2	54	59	85 or 90
3	73	78	123 or 128
4	91	96	159 or 164

All sizes (approximate) in mm

CONNECTIONS


Each radiator comes with ½" inlet connections as standard.

VITA COLUMN HORIZONTAL

Vita Series

VALVE INSTALLATION

All dimensions in mm. Inches in brackets.

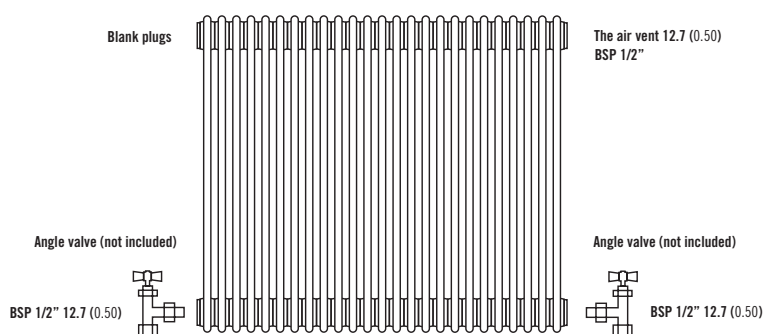


Note: Factory fitted bushes are welded in place and not removable.
If installing TBOE (Top Bottom Opposite End) please note that the radiator MUST be inverted.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	2 Columns		3 Columns			4 Columns
Height	500	600	300	500	600	600
W/m at 75/65/20	835	985	696	1122	1324	1734
n-coefficients	1.25	1.25	1.25	1.25	1.26	1.27
Heated surface area (m ² /m)	1.52	1.96	1.52	2.39	3.04	4.13
Weight (kg/m)	17.39	21.74	15.22	26.09	30.43	43.48
Water contents (l/m)	10.87	13.04	13.04	17.39	19.57	26.09
Wall to tap centre (mm)	54 / 59	54 / 59	73 / 78	73 / 78	73 / 78	91 / 96

PRESSURE DROPS

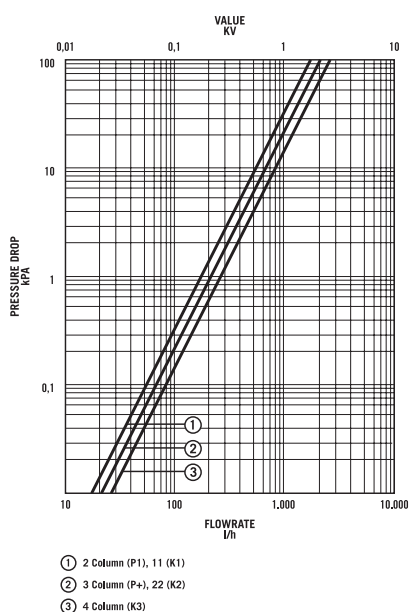

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.