

# VITA CONCORD SLIMLINE

Vita Series

## 50 $\Delta t$

(75/65/20°C)

Height mm	Length mm	Elements	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
<b>1800</b>	320	8	448300	872	2975	£196.65	£235.98
	440	11	448301	1199	4091	£263.80	£316.56
	520	13	448302	1417	4835	£293.78	£352.54
	640	16	448303	1744	5951	£359.74	£431.69
<b>2000</b>	320	8	448304	978	3337	£202.65	£243.18
	440	11	448305	1344	4586	£269.80	£323.76
	520	13	448306	1589	5422	£302.17	£362.60
	640	16	448307	1956	6674	£372.94	£447.53

$\Delta t50$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t40$  or  $\Delta t30$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.


# VITA CONCORD SLIMLINE

Vita Series

## WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

Type	Back face to finished wall D		Connection centres from finished wall D1		Front face from finished wall D2	
	mm	mm	mm	mm	mm	mm
Slimline	35	1.38	50	1.97	130	5.12

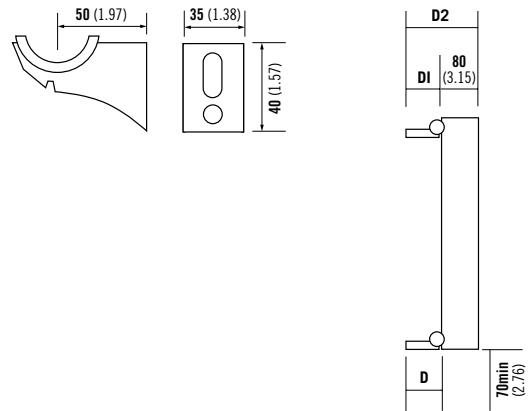


## FIXING POSITIONS

All dimensions in mm. Inches in brackets.



## PIPING INSTRUCTIONS

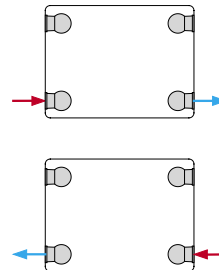

## CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Slimline	
	Height	1800
W/m at 75/65/20	2725	3056
n-coefficients	1.30	1.31
Heated surface area (m <sup>2</sup> /m)	6.90	7.65
Weight (kg/m)	77.81	78.50
Water contents (l/m)	17.50	19.25
Wall to tap centre (mm)	50	50

**STEEL THICKNESS 1.5mm**