


Como provides a strikingly modern, flattened rectangular tube design radiator that is equally at ease in the bathroom as the kitchen. Available in **brushed stainless steel** only, it creates an ambience of its own within a wider design space, creating a conversation piece for any room in which it finds a home.

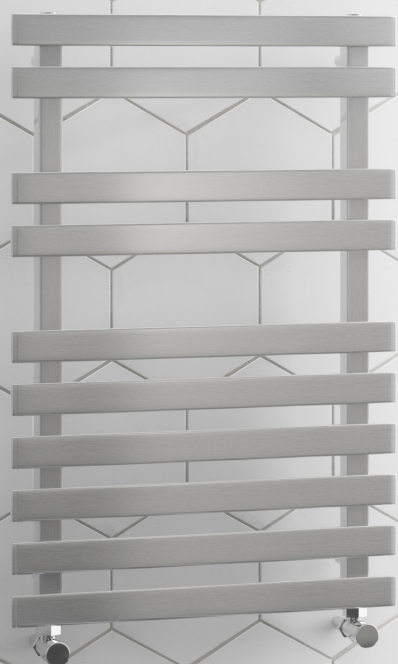

COMO

Stainless Steel radiator

Boutique Series

50 Δt


(75/65/20°C)

STRAIGHT

Height mm	Length mm	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
750	500	720001	247	843	£348.65	£418.38
1000	500	720002	306	1044	£475.39	£570.47
1200	500	720003	341	1164	£570.47	£684.56
1500	500	720004	421	1437	£697.24	£836.69

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

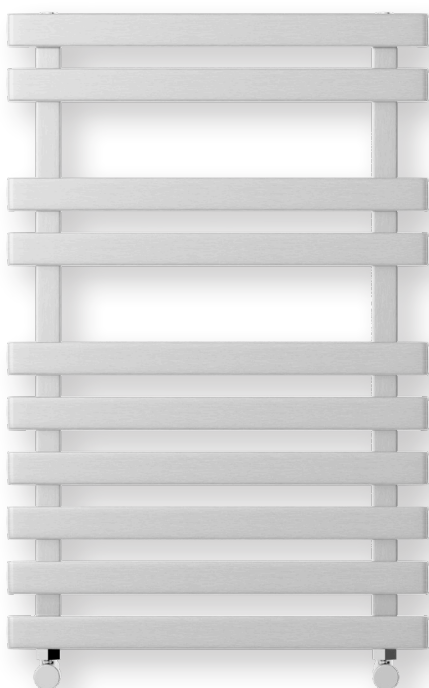

COMO


Stainless Steel radiator

Boutique Series

WALL MOUNTING INFORMATION



All dimensions in mm.

TOOLS REQUIRED FOR INSTALLATION

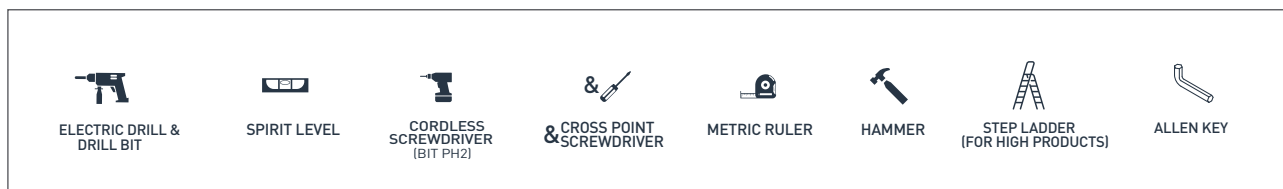

INSTALLATION INSTRUCTIONS

Place your radiator at least 12,5 cm above the floor.
Provide insulation by wrapping PTFE tape on the treads before installing the valves.
Apply silicone seal fluid to all treaded parts containing o-rings.
Connect your radiator to the utilities after following all the installation steps in the manual.
After connecting to the utilities, do not forget to discharge the trapped air inside the radiator.

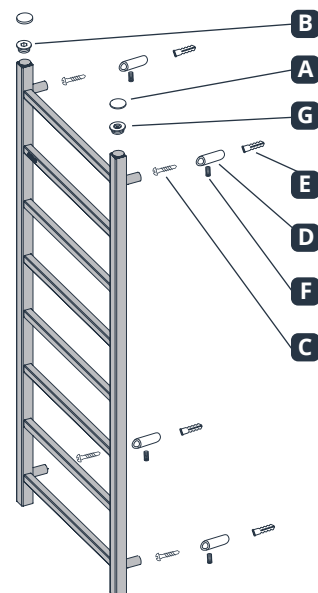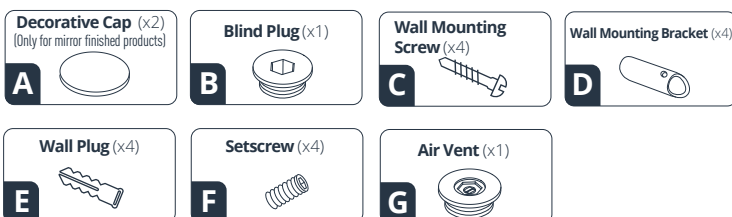

INSTALLATION INSTRUCTIONS FOR THE STAINLESS STEEL TOWEL RAIL

