

**Lecco, exclusive to Stelrad**, offers a tantalising new modern radiator profile, featuring a combination of traditional ladder rail and contemporary window style radiator in a stunning amalgam of **stainless steel** - with two tone metal finish bars, providing a unique blend of ancient and modern in one striking radiator for the kitchen or bathroom.



**NEW & EXCLUSIVE TO STELRAD**

# LECCO

Stainless Steel radiator

Boutique Series

**50  $\Delta t$**

(75/65/20°C)

## STRAIGHT

Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
<b>1200</b>	500	730001	200	682	£600.00	£720.00

$\Delta t$ 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t$ 40 or  $\Delta t$ 30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.



**NEW & EXCLUSIVE TO STELRAD**

# LECCO

## Stainless Steel radiator

## Boutique Series

### WALL MOUNTING INFORMATION



All dimensions in mm.

### TOOLS REQUIRED FOR INSTALLATION



### INSTALLATION INSTRUCTIONS

Place your radiator at least 12,5 cm above the floor.  
Provide insulation by wrapping PTFE tape on the treads before installing the valves.  
Apply silicone seal fluid to all treaded parts containing o-rings.  
Connect your radiator to the utilities after following all the installation steps in the manual.  
After connecting to the utilities, do not forget to discharge the trapped air inside the radiator.

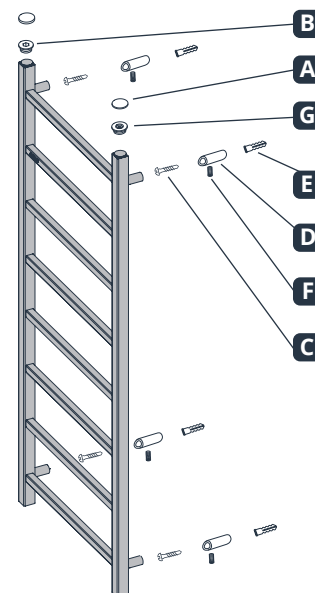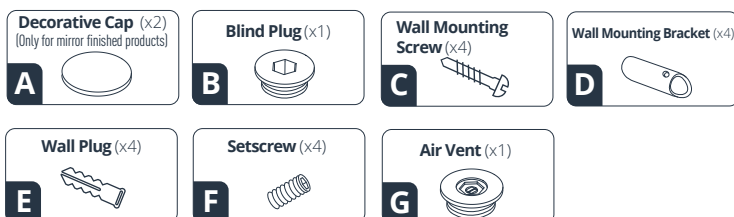

### INSTALLATION INSTRUCTIONS FOR THE STAINLESS STEEL TOWEL RAIL

