




SOFTLINE DECO VERTICAL CONCEPT

Softline Series

50 Δt

(75/65/20°C)

K2




Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	400	12	24182204	1476	5036	£389.26	£467.11
	500	15	24182205	1845	6295	£418.28	£501.94
	600	18	24182206	2214	7554	£448.94	£538.73


$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV



UIN	Elements	Price excl VAT	Price incl VAT
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM	£52.65	£63.18
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN	£52.65	£63.18
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM	£52.65	£63.18
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM	£52.65	£63.18
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN	£52.65	£63.18
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM	£52.65	£63.18
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM	£52.65	£63.18
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN	£52.65	£63.18
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM	£52.65	£63.18
14531610	CENTRE TAP TRV ANGLED L CHROME -10MM	£52.65	£63.18
14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN	£52.65	£63.18
14531615	CENTRE TAP TRV ANGLED L CHROME -15MM	£52.65	£63.18
14531710	CENTRE TAP TRV ANGLED R WHITE -10MM	£52.65	£63.18
14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN	£52.65	£63.18
14531715	CENTRE TAP TRV ANGLED R WHITE -15MM	£52.65	£63.18
14531810	CENTRE TAP TRV ANGLED R CHROME -10MM	£52.65	£63.18
14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN	£52.65	£63.18
14531815	CENTRE TAP TRV ANGLED R CHROME -15MM	£52.65	£63.18

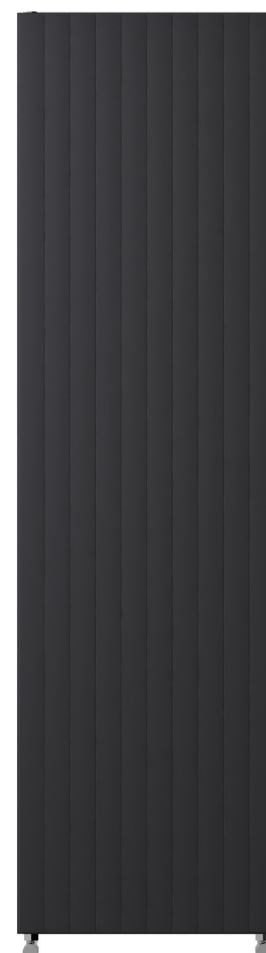


SOFTLINE DECO VERTICAL CONCEPT

Softline Series


WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

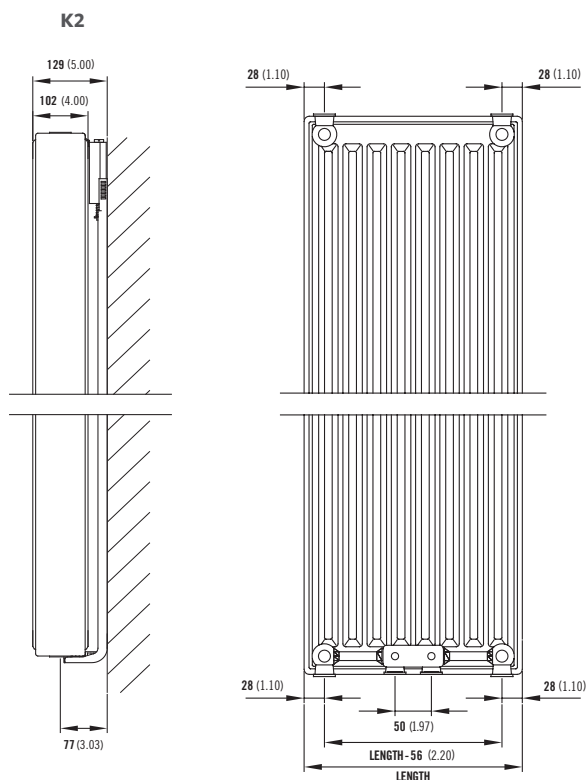

Comes complete with Stelrad's class leading safety bracket.

MOUNTING BRACKETS



Height		H2		H3		H4	
mm	inches	mm	inches	mm	inches	mm	inches
1800	70.90	70	2.75	830	43.89	1590	63.58


SOFTLINE DECO VERTICAL

Softline Series

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

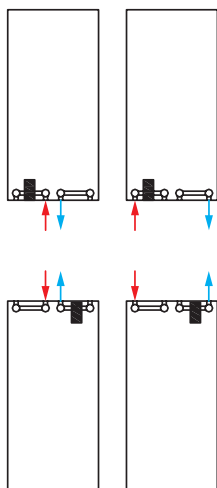

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K2
Height	1800
W/m at 75/65/20	3690
n-coefficients	1.32
Heated surface area (m²/m)	29.90
Weight (kg/m)	105.30
Water contents (l/m)	15.90
Wall to tap centre (mm)	77
K _M	20.69

PRESSURE DROPS

