

The Stelrad Column Horizontal is perfectly designed for all interiors whether it's contemporary or traditional.

COLUMN HORIZONTAL



COLUMN HORIZONTAL

Boutique Series

50 Δt

(75/65/20°C)

2 COLUMN

Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
500	628	463012	499	1703	£132.22	£158.66
	858	463013	691	2358	£165.28	£198.34
	1042	463014	845	2884	£209.38	£251.26
	1272	463015	1037	3539	£252.65	£303.19
600	628	463028	589	2010	£145.44	£174.53
	858	463029	815	2782	£165.28	£198.34
	1042	463030	997	3403	£211.55	£253.86
	1272	463031	1223	4174	£271.03	£325.24

3 COLUMN

4 COLUMN

Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
300	444	463000	288	983	£116.87	£140.24
	628	463001	416	1420	£150.33	£180.40
	858	463002	576	1966	£198.32	£237.98
	1042	463003	704	2403	£231.38	£277.66
	1272	463004	864	2949	£276.20	£331.44
	1456	463005	992	3386	£323.12	£387.74
	1870	463006	1280	4369	£420.46	£504.55
500	444	463016	464	1584	£125.00	£150.00
	628	463017	671	2290	£145.44	£174.53
	858	463018	929	3171	£178.48	£214.18
	1042	463019	1,13	3874	£244.60	£293.52
	1272	463020	1393	4754	£323.93	£388.72
	1456	463021	1600	5461	£341.06	£409.27
	1870	463022	2064	7044	£417.06	£500.47
600	444	463032	548	1870	£148.93	£178.72
	628	463033	792	2703	£158.65	£190.38
	858	463034	1096	3741	£185.10	£222.12
	1042	463035	1340	4573	£211.55	£253.86
	1272	463036	1644	5611	£284.26	£341.11
	1456	463037	1888	6444	£333.13	£399.76
	1870	463038	2436	8314	£433.83	£520.60
750	858	463044	1337	4563	£236.96	£284.35
	1042	463045	1635	5580	£295.97	£355.16
	1272	463046	2006	6846	£354.00	£424.80
	1456	463047	2303	7860	£413.00	£495.60
	1870	463048	2972	10143	£531.00	£637.20
4 COLUMN	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
	444	463007	377	1287	£150.59	£180.71
	628	463008	545	1860	£169.11	£202.93
	858	463009	754	2573	£211.84	£254.21
	1042	463010	922	3147	£268.40	£322.08
	1272	463011	1131	3860	£321.02	£385.22
	-	-	-	-	-	-
4 COLUMN	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
	444	463023	608	2075	£155.01	£186.01
	628	463024	879	3000	£162.98	£195.58
	858	463025	1217	4154	£205.17	£246.20
	1042	463026	1487	5075	£261.45	£313.74
	1272	463027	1825	6229	£323.93	£388.72
	-	-	-	-	-	-
4 COLUMN	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
	444	463039	718	2,451	£155.26	£186.31
	628	463040	1037	3,539	£165.28	£198.34
	858	463041	1436	4,901	£211.55	£253.86
	1042	463042	1756	5,993	£271.03	£325.24
	1272	463043	2155	7,355	£323.93	£388.72
	-	-	-	-	-	-
4 COLUMN	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
	444	463049	877	2993	£183.32	£219.98
	628	463050	1266	4321	£258.35	£310.02
	858	463051	1753	5983	£270.83	£325.00
	1042	463052	2143	7314	£318.81	£382.57
	1272	463053	2630	8976	£399.08	£478.90

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLUMN HORIZONTAL

Boutique Series

COLUMN HORIZONTAL FLOOR MOUNTING BRACKETS





UIN 148137 White
(sold in pairs)

FLOOR MOUNTING BRACKET INFORMATION

400 - 1500mm	2 feet
--------------	--------


OPTIONAL FLOOR MOUNTING BRACKETS

All dimensions in mm. Inches in brackets.

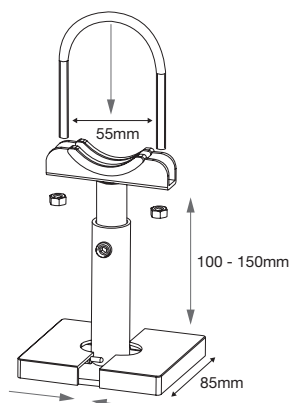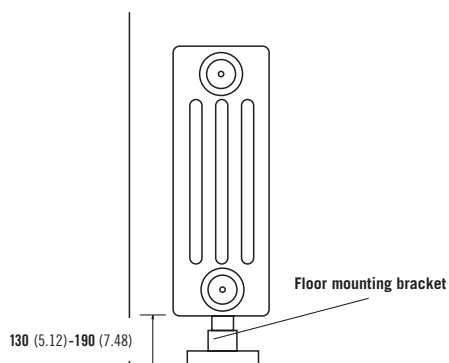

BRACKET INSTALLATION

All dimensions in mm. Inches in brackets.

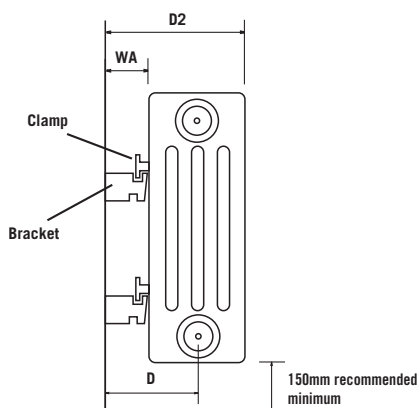

MEASUREMENTS USING 10mm CVD BRACKETS SLOT

Add 5mm if using 15mm slot

	WA	D	D2
2 Col	23	54	85
3 Col	23	73	123
4 Col	23	91	159

BRACKETS AND CLAMPS REQUIRED

	No of Sections
4	0 - 23
6	24 - 41

Number of columns	Wall to centre of connections		Wall to front face of radiator
	Using 10mm bracket slot	Using 15mm bracket slot	
2	54	59	85 or 90
3	73	78	123 or 128
4	91	96	159 or 164

All sizes (approximate) in mm

CONNECTIONS


Each radiator comes with ½" inlet connections as standard.

COLUMN HORIZONTAL

Boutique Series

VALVE INSTALLATION

All dimensions in mm. Inches in brackets.

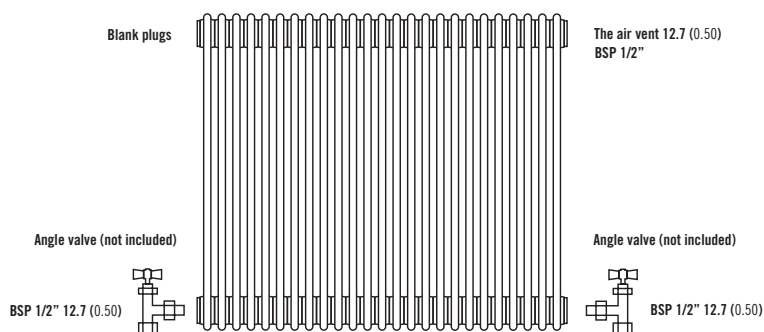


Note: Factory fitted bushes are welded in place and not removable.
If installing TBOE (Top Bottom Opposite End) please note that the radiator MUST be inverted.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	2 Columns		3 Columns			4 Columns
Height	500	600	300	500	600	600
W/m at 75/65/20	835	985	696	1122	1324	1734
n-coefficients	1.25	1.25	1.25	1.25	1.26	1.27
Heated surface area (m ² /m)	1.52	1.96	1.52	2.39	3.04	4.13
Weight (kg/m)	17.39	21.74	15.22	26.09	30.43	43.48
Water contents (l/m)	10.87	13.04	13.04	17.39	19.57	26.09
Wall to tap centre (mm)	54 / 59	54 / 59	73 / 78	73 / 78	73 / 78	91 / 96

PRESSURE DROPS

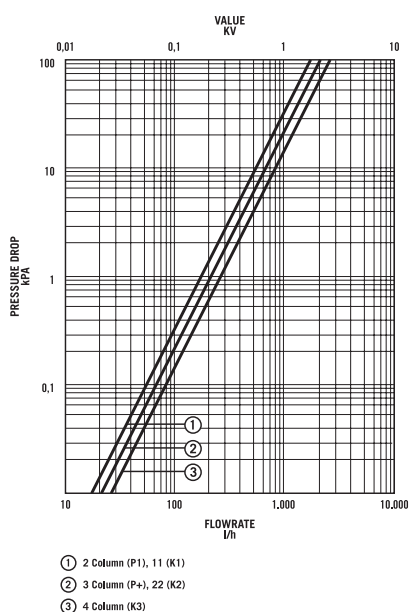

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.