



The Stelrad Concord Slimline radiator is fashionable with slim vertical flat panel tubing to maximise the space in your room.

CONCORD SLIMLINE

Boutique Series

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
1800	320	8	448300	872	2975	£204.52	£245.42
	440	11	448301	1199	4091	£274.35	£329.22
	520	13	448302	1417	4835	£305.53	£366.64
	640	16	448303	1744	5951	£374.13	£448.96
2000	320	8	448304	978	3337	£210.76	£252.91
	440	11	448305	1344	4586	£280.59	£336.71
	520	13	448306	1589	5422	£314.26	£377.11
	640	16	448307	1956	6674	£387.86	£465.43

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


CONCORD SLIMLINE

Boutique Series

WALL MOUNTING INFORMATION


All dimensions in mm. Inches in brackets.

Type	Back face to finished wall D		Connection centres from finished wall D1		Front face from finished wall D2	
	mm	mm	mm	mm	mm	mm
Slimline	35	1.38	50	1.97	130	5.12

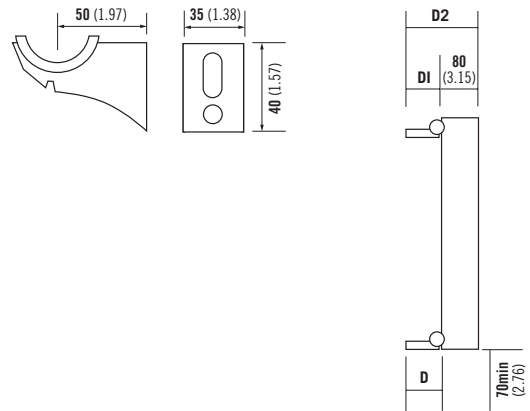


FIXING POSITIONS

All dimensions in mm. Inches in brackets.

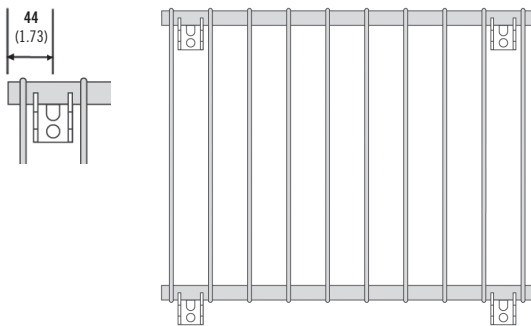

PIPING INSTRUCTIONS

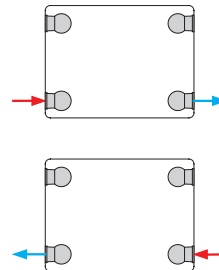

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Slimline	
	Height	1800
W/m at 75/65/20	2725	3056
n-coefficients	1.30	1.31
Heated surface area (m ² /m)	6.90	7.65
Weight (kg/m)	77.81	78.50
Water contents (l/m)	17.50	19.25
Wall to tap centre (mm)	50	50

STEEL THICKNESS 1.5mm