



The Stelrad Deco Vertical, is an attractive slim vertical radiator featuring an elegant vertical lined front face adding style and panache to any modern home.


# DECO VERTICAL

Boutique Series

**50  $\Delta t$**

(75/65/20°C)

**K2**




Height mm	Length mm	Sections	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
				Watts	Btu/h		
<b>1800</b>	400	12	89222418	1476	5036	£264.07	£316.88
	500	15	89222518	1845	6295	£290.17	£348.20
	600	18	89222618	2214	7554	£317.77	£381.32

$\Delta t$ 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t$ 40 or  $\Delta t$ 30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

### CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00




# DECO VERTICAL

Boutique Series


## WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

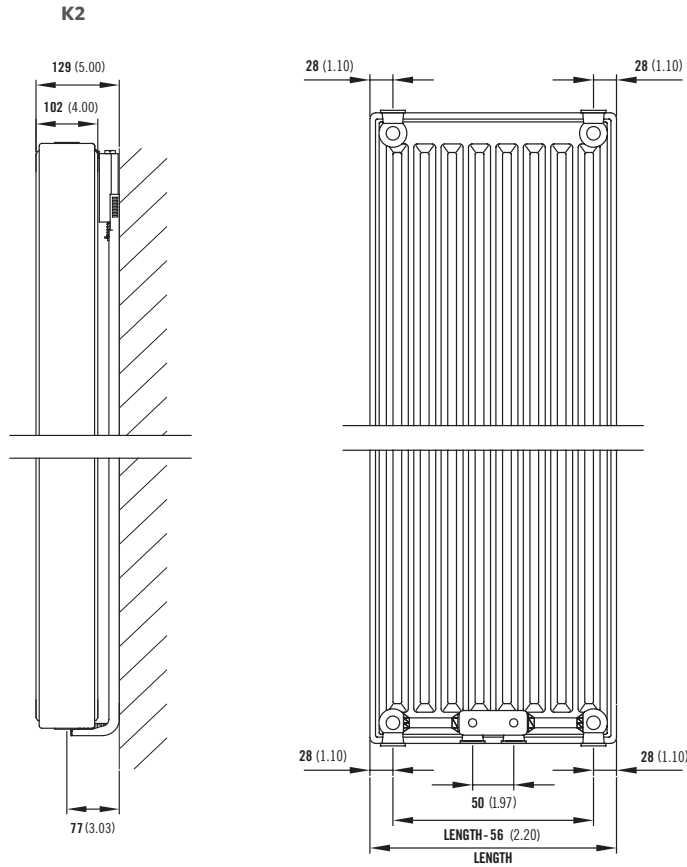

Comes complete with Stelrad's class leading safety bracket.

## MOUNTING BRACKETS



Height		H2		H3		H4	
mm	inches	mm	inches	mm	inches	mm	inches
1800	70.90	70	2.75	830	43.89	1590	63.58


# DECO VERTICAL

Boutique Series

## CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


## PIPING OPTIONS

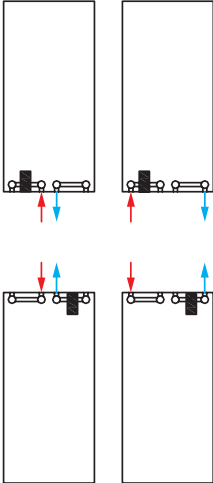

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K2
Height	1800
W/m at 75/65/20	3690
n-coefficients	1.32
Heated surface area (m <sup>2</sup> /m)	29.90
Weight (kg/m)	105.30
Water contents (l/m)	15.90
Wall to tap centre (mm)	77
K <sub>M</sub>	20.70

## PRESSURE DROPS

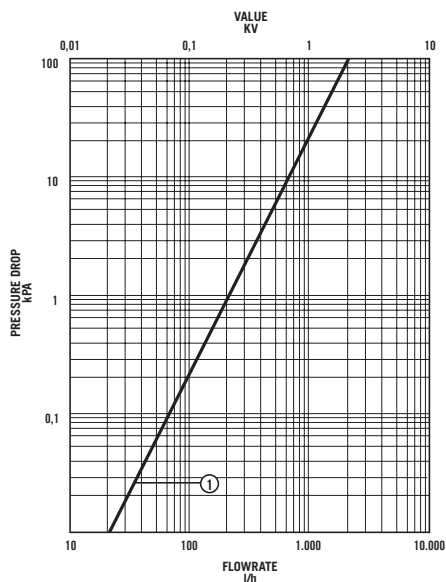

① Type 21 (P+), 22 (K2)