

The Stelrad Deco Concept in Anthracite grey adds cool and contemporary colour to sleek and elegant lines to make a smart fashion statement that'll complement any choice of décor.



# DECO CONCEPT

## Boutique Series

**50  $\Delta t$**

(75/65/20°C)

**K1**



**K2**



| Height<br>mm | Length<br>mm | Stelrad<br>UIN | Heat output<br>Watts | Heat output<br>Btu/h | Price<br>excl VAT | Price<br>incl VAT | Stelrad<br>UIN | Heat output<br>Watts | Heat output<br>Btu/h | Price<br>excl VAT | Price<br>incl VAT |
|--------------|--------------|----------------|----------------------|----------------------|-------------------|-------------------|----------------|----------------------|----------------------|-------------------|-------------------|
| <b>600</b>   | 400          | 22601104       | 348                  | 1187                 | £118.28           | £141.94           | 22602204       | 640                  | 2184                 | £142.83           | £171.40           |
|              | 600          | 22601106       | 522                  | 1781                 | £125.25           | £150.30           | 22602206       | 961                  | 3279                 | £161.73           | £194.08           |
|              | 800          | 22601108       | 696                  | 2375                 | £141.43           | £169.72           | 22602208       | 1281                 | 4371                 | £174.98           | £209.98           |
|              | 1000         | 22601110       | 870                  | 2968                 | £157.63           | £189.16           | 22602210       | 1601                 | 5463                 | £190.10           | £228.12           |
|              | 1200         | 22601112       | 1044                 | 3562                 | £173.82           | £208.58           | 22602212       | 1921                 | 6554                 | £212.77           | £255.32           |
|              | 1400         | 22601114       | 1218                 | 4156                 | £190.02           | £228.02           | 22602214       | 2241                 | 7646                 | £252.01           | £302.41           |

$\Delta t50$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t40$  or  $\Delta t30$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.


**DECO CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.**

# DECO CONCEPT

## Boutique Series


### WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

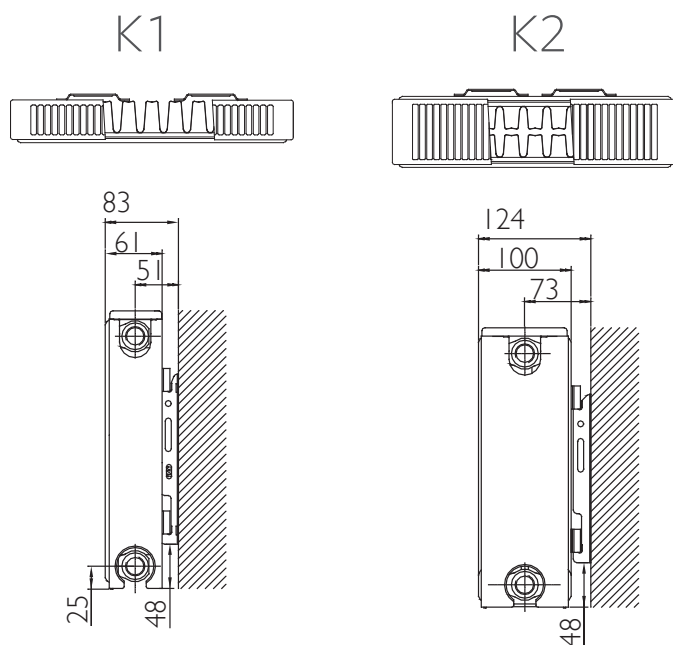

### MOUNTING BRACKETS

All dimensions in mm. Inches in brackets. Floor mounting brackets available.

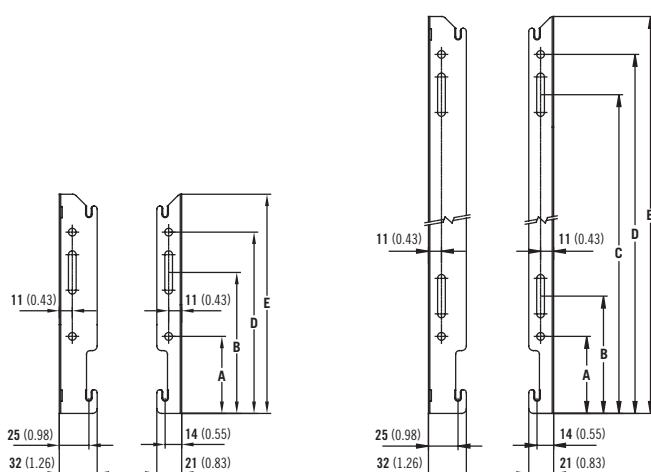


| Dimensions | mm  | inches |
|------------|-----|--------|
| Height     | 600 | 23.62  |
| A          | 65  | 2.56   |
| B          | 99  | 3.90   |
| C          | 419 | 16.50  |
| D          | 453 | 17.83  |
| E          | 485 | 19.09  |

# DECO CONCEPT

## Boutique Series

### K1 & K2 LUG POSITIONS (New as of June 2016).

All dimensions in mm. Inches in brackets.

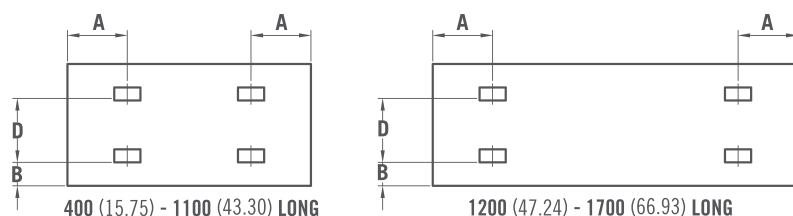

### CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

### PANEL HEIGHT

### D


### K1

### K2

| mm  | in    | mm  | in    |
|-----|-------|-----|-------|
| 600 | 23.62 | 455 | 17.91 |

| Dimensions     | mm  | in   | mm  | in   |
|----------------|-----|------|-----|------|
| A 400mm        | 117 | 4.61 | 133 | 5.24 |
| A 500 - 2000mm | 150 | 5.91 | 133 | 5.24 |
| B 400 - 2000mm | 60  | 2.36 | 60  | 2.36 |

### PIPING OPTIONS

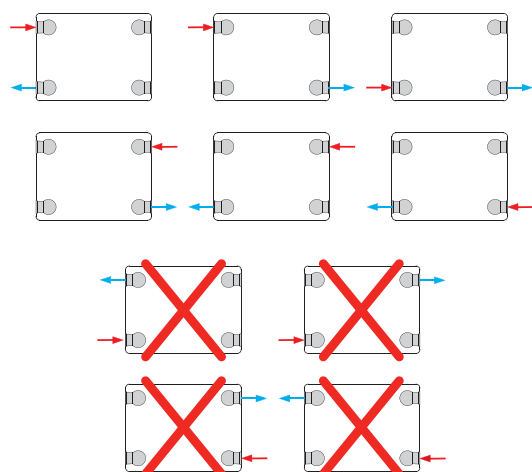

### EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

| Type                                    | K1    | K2    |
|-----------------------------------------|-------|-------|
| Height                                  | 600   | 600   |
| W/m at 75/65/20                         | 911   | 1634  |
| n-coefficients                          | 1.28  | 1.32  |
| Heated surface area (m <sup>2</sup> /m) | 4.66  | 7.74  |
| Weight (kg/m)                           | 24.65 | 40.00 |
| Water contents (l/m)                    | 3.25  | 6.60  |
| Wall to tap centre (mm)                 | 51    | 73    |

### PRESSURE DROP

