



The Stelrad Slimline Towel Rail will fit perfectly into those smaller bathrooms and ensuites, giving you a classy chrome radiator option for smaller spaces.

SLIMLINE TOWEL RAIL

Boutique Series

50 Δt

(75/65/20°C)

STRAIGHT CHROME

Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
650	400	100	148700	174	594	£63.40	£76.08
803	500	100	148701	236	806	£71.66	£85.99
	600	100	148702	268	915	£77.11	£114.77
1188	500	100	148703	345	1178	£86.42	£103.70
	600	100	148704	402	1372	£103.70	£124.44
1600	500	100	148705	467	1594	£127.71	£153.25
	600	100	148706	548	1870	£153.26	£183.92
1785	500	100	148707	524	1788	£159.29	£191.15
	600	100	148708	614	2095	£191.13	£229.36

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

SLIMLINE TOWEL RAIL

Boutique Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

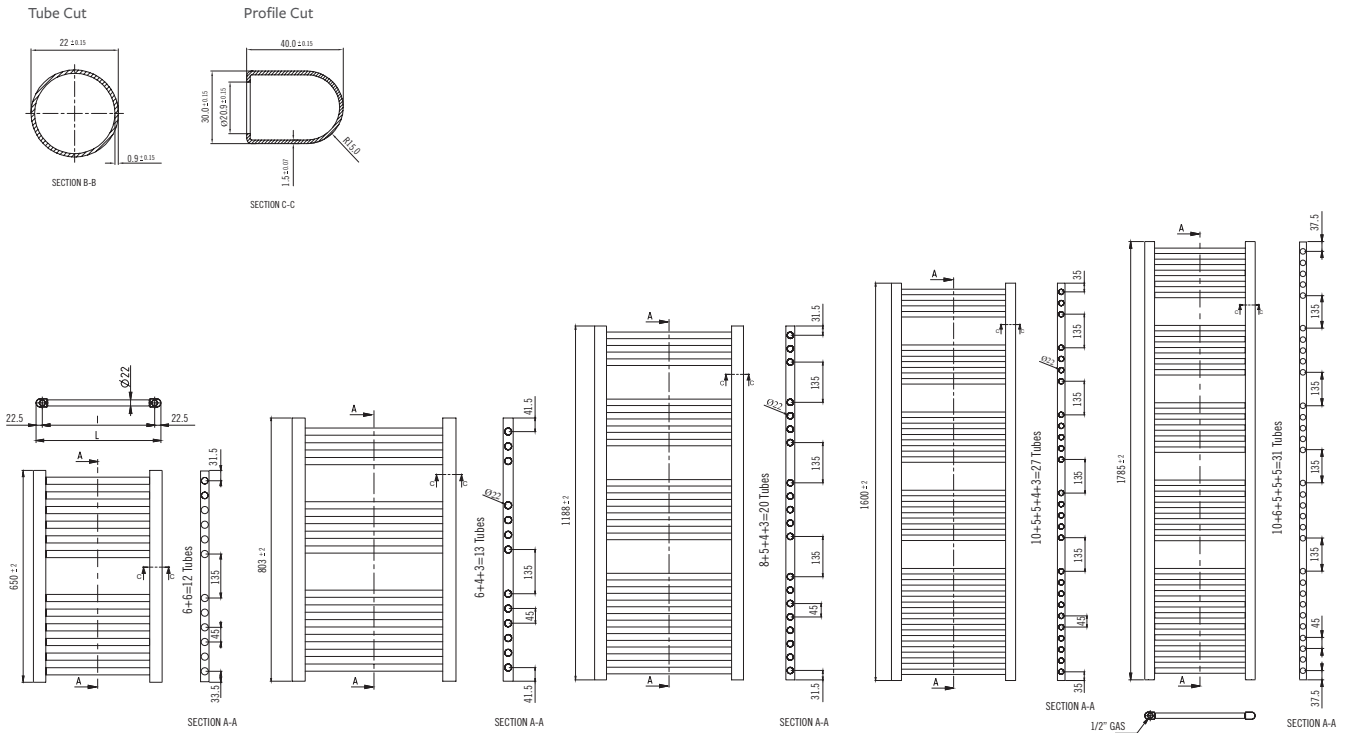

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	STRAIGHT CHROME								
	12 Tubes	13 Tubes	13 Tubes	20 Tubes	20 Tubes	27 Tubes	27 Tubes	31 Tubes	31 Tubes
No of tubes	12	13	13	20	20	27	27	31	31
Height	650	803	803	1188	1188	1600	1600	1785	1785
Length	400	500	600	500	600	500	600	500	600
Watts at 75/65/20	174	236	268	345	402	467	548	524	614
n-coefficients	1.21	1.18	1.19	1.20	1.21	1.23	1.23	1.24	1.24
Weight (kg)	4.10	5.40	6.30	8.20	9.60	10.50	11.90	12.80	14.80
Water contents (l/m)	2.50	3.30	3.90	4.80	5.60	5.90	7.20	7.30	8.30