

The Stelrad Compact Xtra Protection radiator is perfect for bathrooms, showers or wet rooms with its rust resistant coating.



COMPACT XTRA PROTECTION

Boutique Series

50 Δt

(75/65/20°C)

K1



Height mm	Length mm	Stelrad UIN	Watts	Heat output	Btu/hr
450	400	144850	302		1031
	600	144851	454		1550
	800	144852	605		2065
	1000	144853	756		2580
600	400	144854	392		1338
	600	144855	588		2007
	800	144856	784		2676
	1000	144857	980		3345

K2



Height mm	Length mm	Stelrad UIN	Watts	Heat output	Btu/hr
450	400	144858	548		1870
	600	144859	823		2809
	800	144860	1097		3744
	1000	144861	1371		4679
	1200	144867	1645		5614
	1400	144868	1919		6550
	1600	144869	2194		7488
	1800	144870	2468		8423
600	400	144862	693		2365
	600	144863	1039		3546
	800	144864	1386		4730
	1000	144865	1732		5911
	1200	144871	2078		7092
	1400	144872	2425		8277
	1600	144873	2771		9457
	1800	144874	3118		10642

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


COMPACT XTRA PROTECTION

Boutique Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

Floor mounting brackets available.

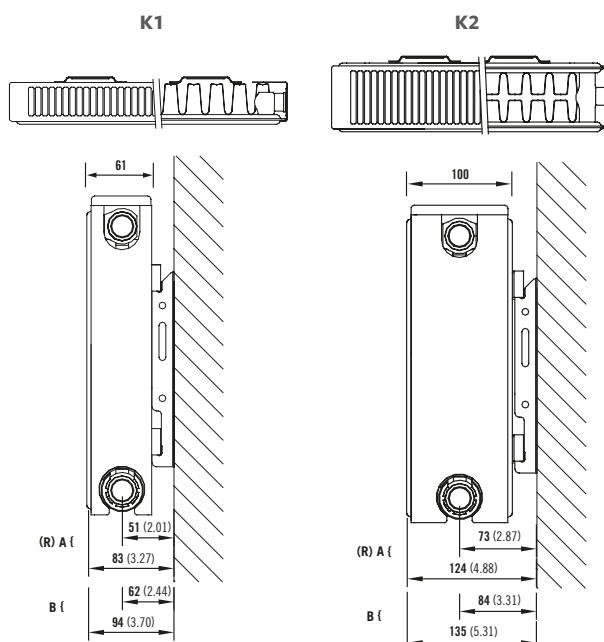


BRACKET POSITION

A = Closest to wall B = Furthest from wall (R) = Recommended mounting position.

COMPACT MOUNTING BRACKETS

All dimensions in mm. Inches in brackets. Floor mounting brackets available.

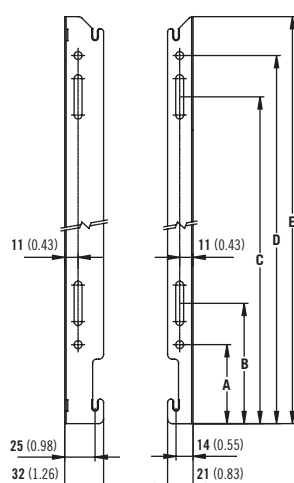

K1 and K2

Dimensions	mm	inches	mm	inches
Height	450	17.72	600	23.62
A	65	2.56	65	2.56
B	99	3.90	99	3.90
C	269	10.59	419	16.50
D	303	11.93	453	17.83
E	335	13.19	485	19.09


Additional Zinc coating to the emitter provides extra protection and helps prevent corrosion and rust, without compromising the heat output.

COMPACT XTRA PROTECTION

Boutique Series

K1 AND K2 LUG POSITIONS

All dimensions in mm. Inches in brackets.

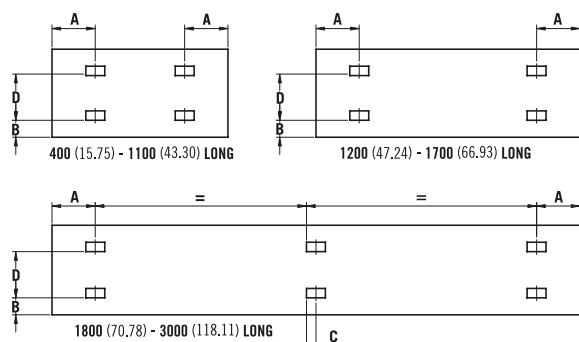

P1, P+ & K2

Dimensions	mm	in
A	133	5.24
B	60	2.36

K1

Dimensions	mm	in
A 400mm	117	4.61
A 500 - 3000mm	150	5.91
B 400 - 3000mm	60	2.36
C 1800 - 3000mm	17	0.67


PANEL HEIGHT D

mm	in	mm	in
300	11.81	155	6.10
450	17.72	305	12.01
600	23.62	455	17.91
700	27.56	555	21.95

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

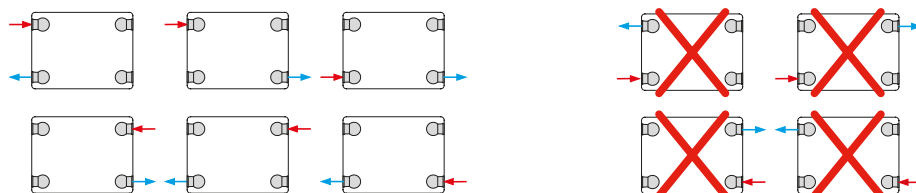


EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1		K2	
Height	450	600	450	600
W/m at 75/65/20	756	980	1371	1732
n-coefficients	1.31	1.29	1.33	1.33
Heated surface area (m ² /m)	3.37	4.66	5.62	7.74
Weight (kg/m)	14.51	19.70	25.90	35.00
Water contents (l/m)	2.57	3.25	5.15	6.60
Wall to tap centre (mm)	51	51	73	73

COMPACT XTRA PROTECTION

Boutique Series

PRESSURE DROPS

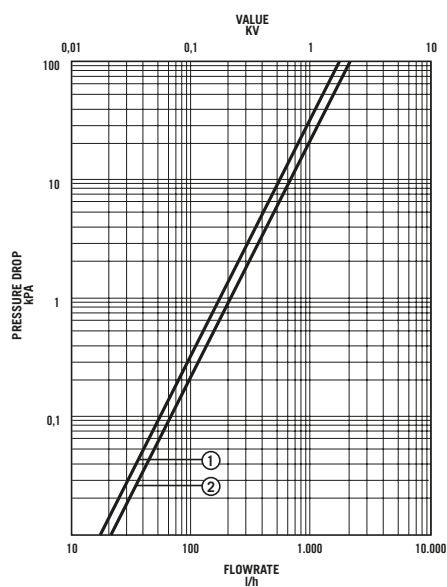

- ① Type 10 (P1), 11 (K1)
- ② Type 21 (P+), 22 (K2)