



### 50 $\Delta t$

(75/65/20°C)

**K3**



Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/hr
<b>300</b>	1000	30	3533310	1418	4838
	2000	60	3533320	2836	9677
<b>500</b>	600	18	3553306	1301	4439
	700	21	3553307	1518	5180
	800	24	3553308	1735	5920
	900	27	3553309	1952	6661
	1000	30	3553310	2169	7401
	1100	33	3553311	2386	8141
	1200	36	3553312	2603	8882
	1400	42	3553314	3037	10363
	1600	48	3553316	3470	11840
	1800	54	3553318	3904	13321
	2000	60	3553320	4338	14802
2400	72	3553324	5206	17764	
<b>600</b>	400	12	3563304	1006	3433
	500	15	3563305	1257	4289
	600	18	3563306	1508	5146
	700	21	3563307	1760	6005
	800	24	3563308	2011	6862
	900	27	3563309	2263	7722
	1000	30	3563310	2514	8578
	1100	33	3563311	2765	9435
	1200	36	3563312	3017	10294
	1400	42	3563314	3520	12011
	1600	48	3563316	4022	13724
1800	54	3563318	4525	15440	
2000	60	3563320	5028	17156	
2400	72	3563324	6034	20589	
<b>700</b>	500	15	3573305	1421	4849
	600	18	3573306	1705	5818
	700	21	3573307	1989	6787
	800	24	3573308	2273	7756
	900	27	3573309	2557	8725
	1000	30	3573310	2841	9694
	1100	33	3573311	3125	10663
	1200	36	3573312	3409	11632
	1400	42	3573314	3977	13570
	1600	48	3573316	4546	15512
	1800	54	3573318	5114	17450
2000	60	3573320	5682	19388	

$\Delta t_{50}$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t_{40}$  or  $\Delta t_{30}$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.


# ELITE K3

## Special Application Series

### WALL MOUNTING AND LUG INFORMATION


All dimensions in mm. Inches in brackets.

**REAR ELEVATION**

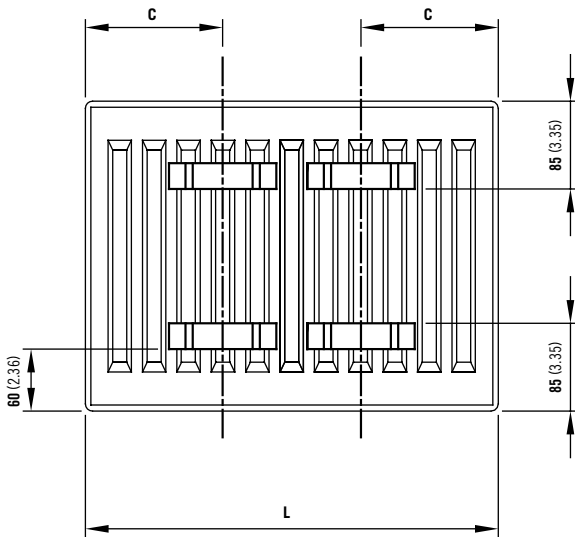


L	C
400 - 1100	133
1200 - 2400	133

**SIDE ELEVATION**

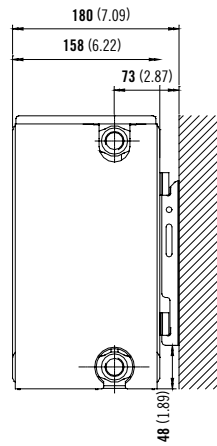

**TOP ELEVATION**

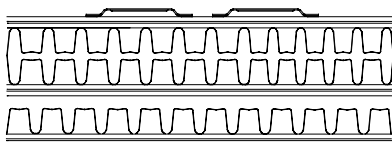

# ELITE K3



## Special Application Series

### FLOORSTANDING BRACKETS

All dimensions in mm. Inches in brackets.



Floor brackets

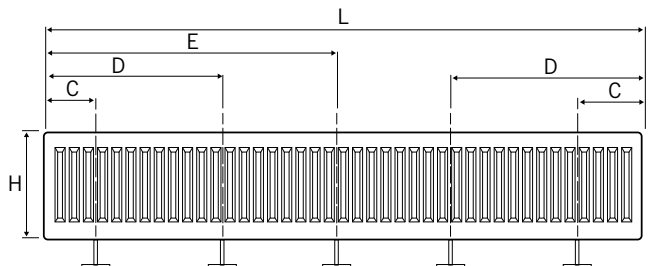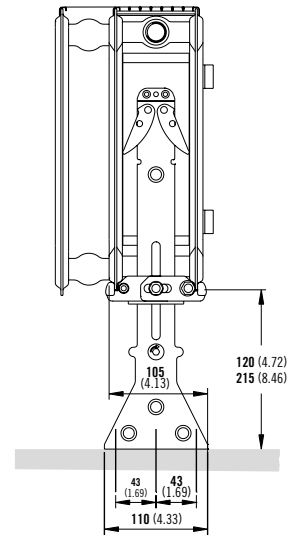

	L	400	500 - 1100	1200	1400 - 1800	2000 - 3000
<b>H</b>	Number	2pc				3pc
300	<b>C</b>	117	150	250	250	250
500	<b>E</b>	-	-	-	-	L/2+17

	L	400	500 - 1100	1200	1400 - 1800	2000	2200	2400	2600	2800	3000
<b>H</b>	Number	2pc			3pc	4pc			5pc		
600	<b>C</b>	117	150	250	250	250			250		
700	<b>D</b>	-	-	-	-	750	817	850	750	817	850
	<b>E</b>	-	-	-	817	-	-	-	L/2+17		


### CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

### EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K3			
Height	300	500	600	700
W/m at 75/65/20	1349	2056	2389	2712
n-coefficients	1.31	1.32	1.32	1.34
Heated surface area (m2/m)	5.26	9.49	11.61	13.72
Weight (kg/m)	25.20	43.40	52.50	60.77
Water contents (l/m)	5.40	8.33	9.80	11.37
Wall to tap centre (mm)	73	73	73	73

### PRESSURE DROPS

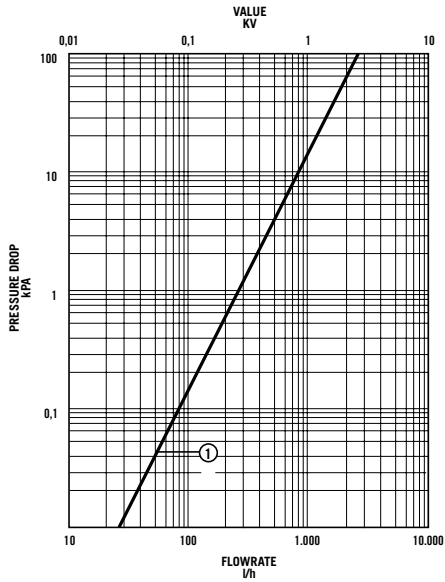

① Type 33 (K3)