

The Stelrad Concord Side Concept radiator in a matt finish Anthracite grey is a straight tubular design with piping at one side giving a sleek, stylish look to any room.

# CONCORD SIDE CONCEPT

Boutique Series

## 50 $\Delta t$

(75/65/20°C)

### STRAIGHT

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
<b>830</b>	500	711001	343	1170
<b>1130</b>	500	711002	468	1597
<b>1430</b>	500	711003	584	1993

$\Delta t50$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t40$  or  $\Delta t30$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

### CENTRE TAP TRV

The Stelrad Centre Thermostatic Radiator Valve (TRV) has several options:

- Chrome or white finish
- 10mm , 15mm or 1/2" system pipe connection
- Left or right side TRV head direction option



UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM
14531610	CENTRE TAP TRV ANGLED L CHROME -10MM
14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME -15MM
14531710	CENTRE TAP TRV ANGLED R WHITE -10MM
14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN
14531715	CENTRE TAP TRV ANGLED R WHITE -15MM
14531810	CENTRE TAP TRV ANGLED R CHROME -10MM
14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN
14531815	CENTRE TAP TRV ANGLED R CHROME -15MM


# CONCORD SIDE CONCEPT

Boutique Series

## WALL MOUNTING INFORMATION

All dimensions in mm.

### STRAIGHT

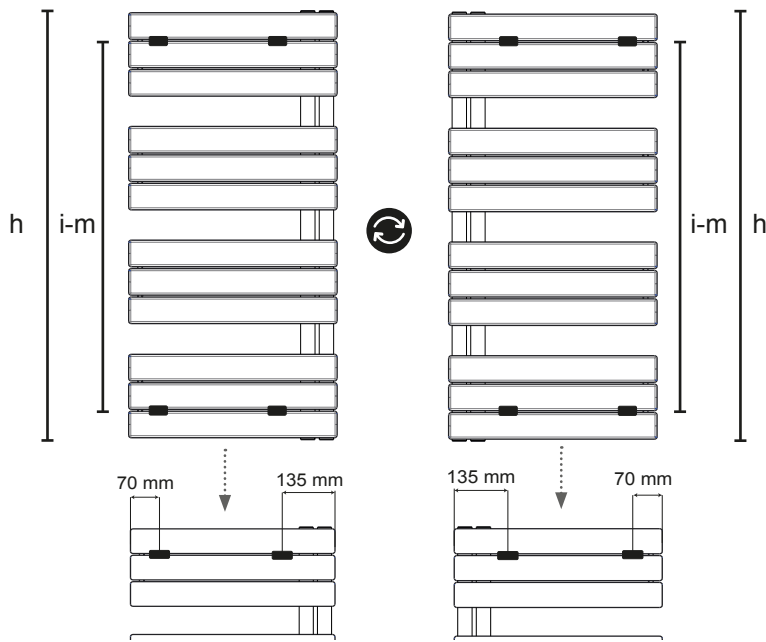

HEIGHT (mm)	I-M (mm)
830	675
1130	975
1430	1275
1730	1575

VALID FOR ALL SIZES

