

The Stelrad Caliente Horizontal is stylish in design, using tubular features to create a sleek and contemporary radiator.



CALIENTE HORIZONTAL

Boutique Series

50 Δt

(75/65/20°C)

SINGLE TUBE

Height mm	Length mm	Stelrad UIN	Watts	Heat output	Btu/hr
594	800	405911800	607		2071
	1000	405911100	740		2525
	1200	405911120	873		2979
	1400	405911140	1004		3426

DOUBLE TUBE

Height mm	Length mm	Stelrad UIN	Watts	Heat output	Btu/hr
594	800	405922800	941		3211
	1000	405922100	1148		3917

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).



For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CALIENTE HORIZONTAL

Boutique Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

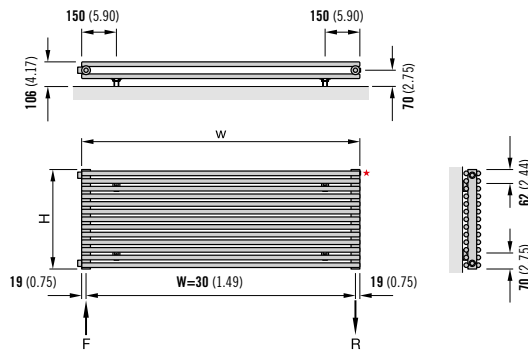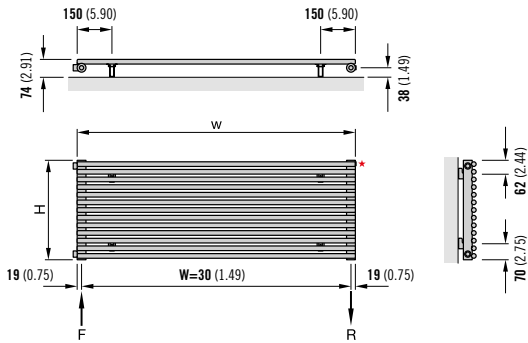

PRODUCT SPECIFICATION

Tube diameter = Ø20mm and Ø38mm
 Steel thickness = 1.25mm for Ø20 ; 1.4mm for Ø38
 Working pressure = 6 bar
 Operating temp = 110° max

★ Air vents

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single	Double
Height	594	594
W/m at 75/65/20	782	1210
n-coefficients	1.25	1.26
Heated surface area (m ² /m)	1.13	2.26
Weight (kg/m)	12.2	22.6
Water contents (l/m)	5.49	12.47
Wall to tap centre (mm)	38	70