Stelrad
Radiator Group

The Stelrad Caliente Vertical range boasts a cleverly designed and stylish tube on tube feature, which will enhance any contemporary home setting.

CALIENTE VERTICAL

Stelrad Radiator Group

Boutique Series

50 Δt

(75/65/20°C)

SINGLE TUBE

Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1200	330	401211330	501	1709
	495	401211495	785	2679
1800	330	401811330	752	2566
	429	401811429	1015	3463
	528	401811528	1225	4180
	660	401811660	1561	5326
	726	401811726	1712	5842

DOUBLE TUBE

Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1800	495	401822495	1865	6364
	660	401822660	2385	8138

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20ºC. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CALIENTE VERTICAL

Boutique Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

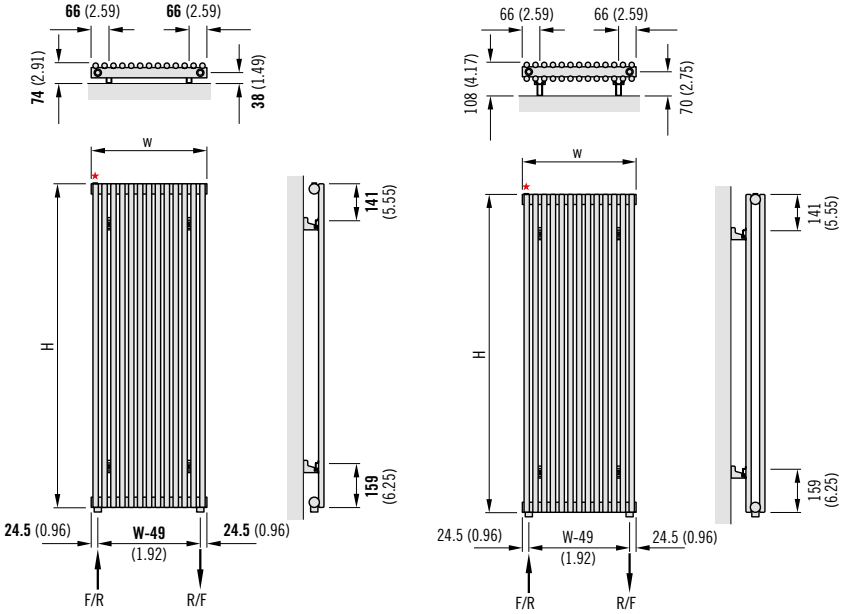

PRODUCT SPECIFICATION

- Tube diameter = Ø20mm and Ø38mm
- Steel thickness = 1.25mm for Ø20 ; 1.4mm for Ø38
- Working pressure = 6 bar
- Operating temp = 110° max

★ Air vents

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single		Double
Height	1200	1800	1800
W/m at 75/65/20	1470	2126	3212
n-coefficients	1.27	1.28	10.28
Heated surface area (m^2/m)	2.28	3.43	6.85
Weight (kg/m)	23.33	33.64	64.85
Water contents (l/m)	10.61	15.15	28.18
Wall to tap centre (mm)	38	38	70