

The Stelrad Caliente Vertical range boasts a cleverly designed and stylish tube on tube feature, which will enhance any contemporary home setting.



# CALIENTE VERTICAL

## Boutique Series

### 50 $\Delta t$

(75/65/20°C)

#### SINGLE TUBE

Height mm	Length mm	Stelrad UIN	Watts	Heat output	Btu/hr
<b>1200</b>	330	401211330	501		1709
	495	401211495	785		2679
<b>1800</b>	330	401811330	752		2566
	429	401811429	1015		3463
	528	401811528	1225		4180
	660	401811660	1561		5326
	726	401811726	1712		5842

#### DOUBLE TUBE

Height mm	Length mm	Stelrad UIN	Watts	Heat output	Btu/hr
<b>1800</b>	495	401822495	1865		6364
	660	401822660	2385		8138

$\Delta t50$  is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta t40$  or  $\Delta t30$  output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).


For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

# CALIENTE VERTICAL

Boutique Series

## WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

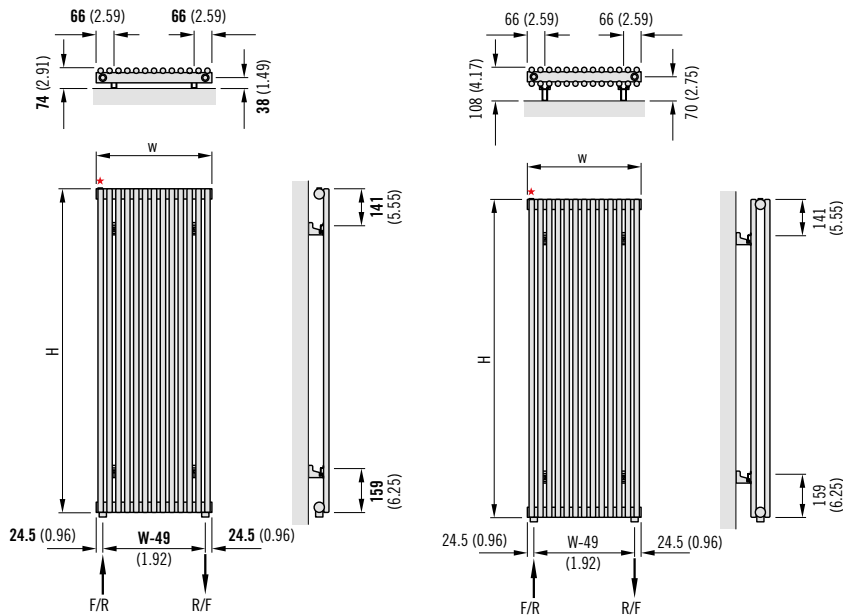

## PRODUCT SPECIFICATION

Tube diameter = Ø20mm and Ø38mm  
 Steel thickness = 1.25mm for Ø20 ; 1.4mm for Ø38  
 Working pressure = 6 bar  
 Operating temp = 110° max

★ Air vents

## CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single	Double
Height	1200 1800	1800
W/m at 75/65/20	1470 2126	3212
n-coefficients	1.27 1.28	10.28
Heated surface area (m <sup>2</sup> /m)	2.28 3.43	6.85
Weight (kg/m)	23.33 33.64	64.85
Water contents (l/m)	10.61 15.15	28.18
Wall to tap centre (mm)	38 38	70