

HOME


SERIES



Compact
K3

COMPACT K3

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr
600	400	12	76603304h	956	3,262
	500	15	76603305h	1,195	4,077
	600	18	76603306h	1,433	4,889
	700	21	76603307h	1,672	5,705
	800	24	76603308h	1,911	6,520
	900	27	76603309h	2,150	7,336
	1000	30	76603310h	2,389	8,151
	1100	33	76603311h	2,628	8,967
	1200	36	76603312h	2,867	9,782
	1400	42	76603314h	3,345	11,413

COMPACT K3

WALL MOUNTING AND LUG INFORMATION


All dimensions in mm. Inches in brackets.

REAR ELEVATION

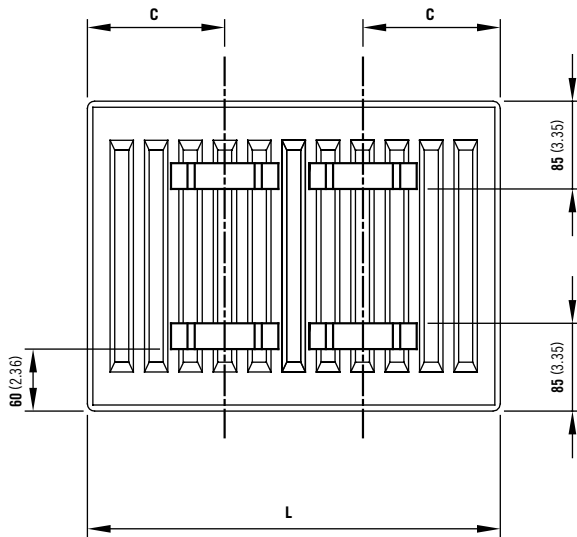


L	C
400 - 1100	133
1200 - 2400	133

SIDE ELEVATION

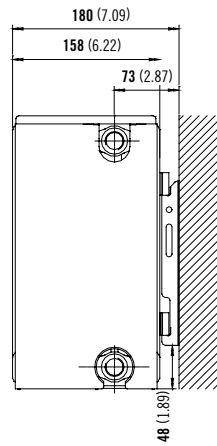

TOP ELEVATION

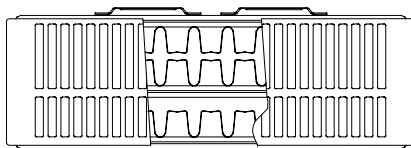



COMPACT K3

FLOORSTANDING BRACKETS

All dimensions in mm. Inches in brackets.



Floor brackets

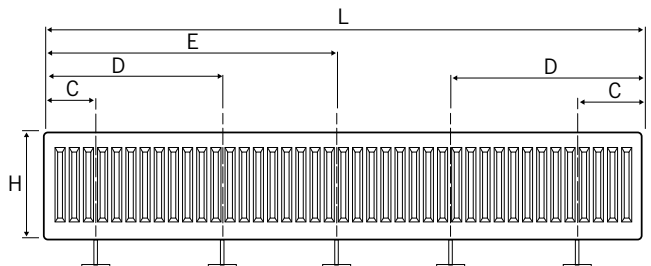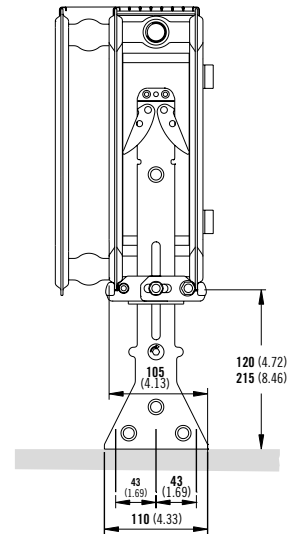

	L	400	500 - 1100	1200	1400 - 1800	2000 - 3000
H	Number	2pc				3pc
300	C	117	150	250	250	250
500	E	-	-	-	-	L/2+17

	L	400	500 - 1100	1200	1400 - 1800	2000	2200	2400	2600	2800	3000
H	Number	2pc			3pc	4pc			5pc		
600	C	117	150	250	250	250			250		
700	D	-	-	-	-	750	817	850	750	817	850
	E	-	-	-	817	-	-	-	L/2+17		

CONNECTIONS


Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K3			
Height	300	500	600	700
W/m at 75/65/20	1349	2056	2389	2712
n-coefficients	1.31	1.32	1.32	1.34
Heated surface area (m2/m)	5.26	9.49	11.61	13.72
Weight (kg/m)	25.20	43.40	52.50	60.77
Water contents (l/m)	5.40	8.33	9.80	11.37
Wall to tap centre (mm)	73	73	73	73

COMPACT K3

PRESSURE DROPS

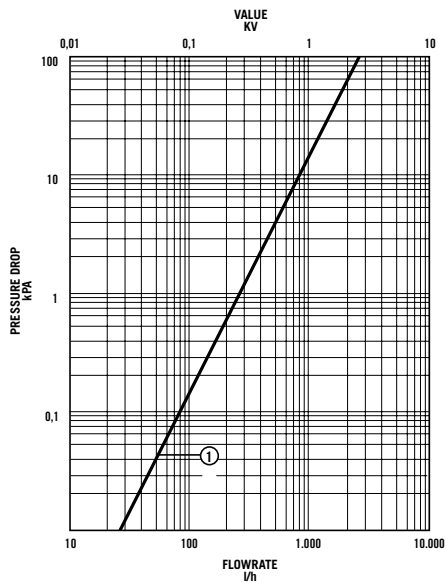

① Type 33 (K3)