

HOME


SERIES

Concord
Lo-Line
Coloured

CONCORD LO-LINE COLOURED

50 Δ t
(75/65/20°C)

DOUBLE



Height mm	Length mm	Elements	Stelrad UIN	Watts	Heat output Btu/hr
148	800	2	148456h	541	1846
	1000	2	148457h	676	2307
	1200	2	148458h	811	2767
	1400	2	148459h	946	3228
	1600	2	148460h	1082	3692
	1800	2	148461h	1217	4153
	2000	2	148462h	1352	4613
	2200	2	148463h	1487	5074
296	800	4	148464h	892	3044
	1000	4	148465h	1115	3805
	1200	4	148466h	1338	4565
	1400	4	148467h	1561	5326
	1600	4	148468h	1784	6087
	1800	4	148469h	2007	6848
	2000	4	148470h	2230	7609
	2200	4	148471h	2453	8370

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

If feet are required, they must be ordered when you purchase your product. The feet are welded on and can not be added to the product once your order has been placed.

Optional extra to have no lugs. This needs specifying at the time of ordering. For floorstanding only.

FLOOR MOUNTING BRACKET INFORMATION


400 - 1400mm	2 feet
1600 - 2200mm	3 feet

CONCORD LO-LINE COLOURED

WALL MOUNTING INFORMATION



All dimensions in mm.

Type	From back of radiator to wall		From wall to centre of connections		From front of radiator to wall	
	mm	inch	mm	inch	mm	inch
Lo-line	25	0.98	97	3.81	125	4.92



FLOOR MOUNTING POSITIONS


All dimensions in mm. Inches in brackets. Must be specified at time of ordering as they are securely welded during manufacture.

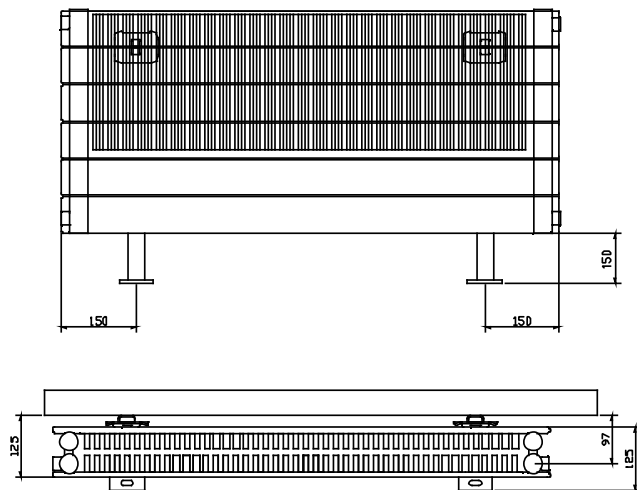


CONCORD LO-LINE COLOURED

LO-LINE FIXING POSITIONS


All dimensions in mm. Inches in brackets.




3 brackets 800 to 1400

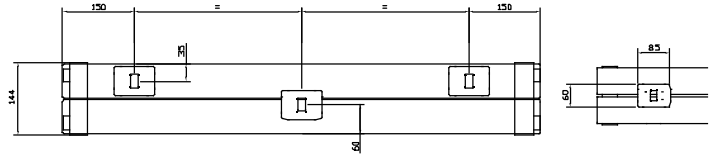

4 brackets 800 to 1400

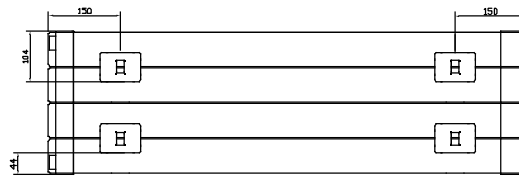



6 brackets 1600 to 2200

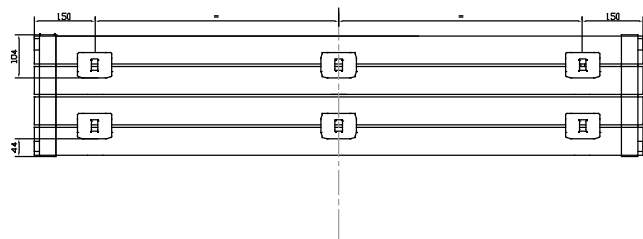

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING INSTRUCTIONS




EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Lo-Line	
Height	148	296
W/m at 75/65/20	676	1115
n-coefficients	1.25	1.28
Heated surface area (m ² /m)	2.51	5.19
Weight (kg/m)	13.30	21.20
Water contents (l/m)	3.10	5.30
Wall to tap centre (mm)	98	98

STEEL THICKNESS 1.25mm

CONCORD LO-LINE COLOURED

PRESSURE DROPS

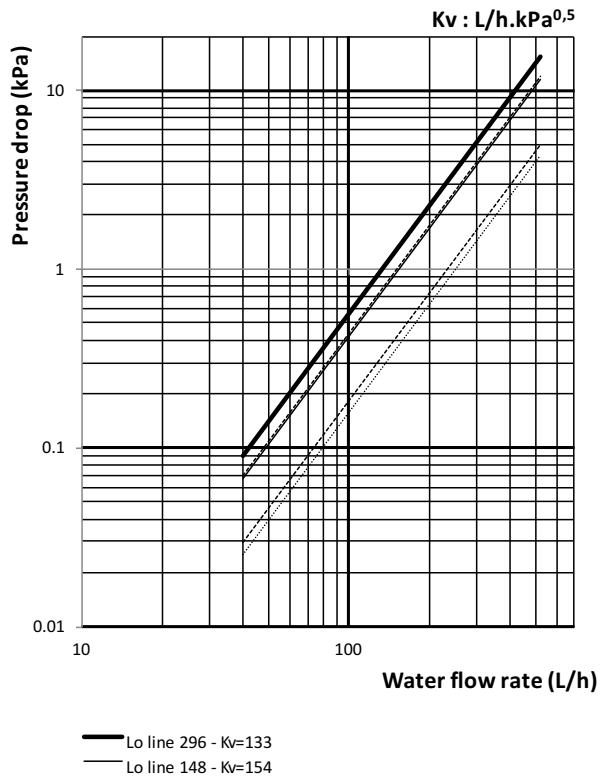


COLOUR GUIDE


RAL COLOURS




RAL 7035
Pale grey




RAL 7038
Agate grey



RAL 7036
Platinum grey




RAL 7030
Stone grey



RAL 7037
Dusty grey



RAL 7015
Slate grey




RAL 9005*
Jet black



RAL 8017
Chocolate brown



RAL 1016
Sulphur yellow



RAL 1021
Cadmium yellow



RAL 1004
Dark Golden yellow



RAL 2008
Light red orange




RAL 3000
Flame red




RAL 3003
Ruby red




RAL 3005
Wine red




RAL 6027
Light green




RAL 6034
Pastel turquoise




RAL 6019
Pastel green




RAL 6033
Turquoise blue



RAL 6020
Chrome green




RAL 6005
Light moss green




RAL 5014
Pigeon blue



RAL 5002
Ultramarine blue



RAL 5024
Pastel blue



RAL 5022
Night blue



RAL 5010
Gentian blue



RAL 9016
Traffic white



RAL 9010
Pure white



RAL 9001
Cream



RAL 1013
Pearl white



RAL 1015
Light ivory




RAL 9002
Grey white


METALLIC COLOURS



N206 BR0006
Silver metallic



N204 BR0004
Bronze metallic



N206 BR0007
Grey metallic

To request up to
5 colour samples, please
email sales@stelrad.com
with your choices and
address details.

The colours shown are reproduced
as accurately as this printing
process will allow.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM

 RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
sales@stelrad.com