

HOME

SERIES



Concord
Rail

CONCORD RAIL

50 Δ t

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Length mm	Tap centres	Stelrad UIN	Watts	Heat output Btu/hr
731	450	400	148581h	342	1167
	600	550	148582h	447	1525
1186	450	400	148583h	530	1808
	600	550	148584h	694	2368
1511	450	400	148585h	666	2272
	600	550	148586h	869	2965
1771	450	400	148587h	777	2651
	600	550	148588h	1010	3446


Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CONCORD RAIL

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

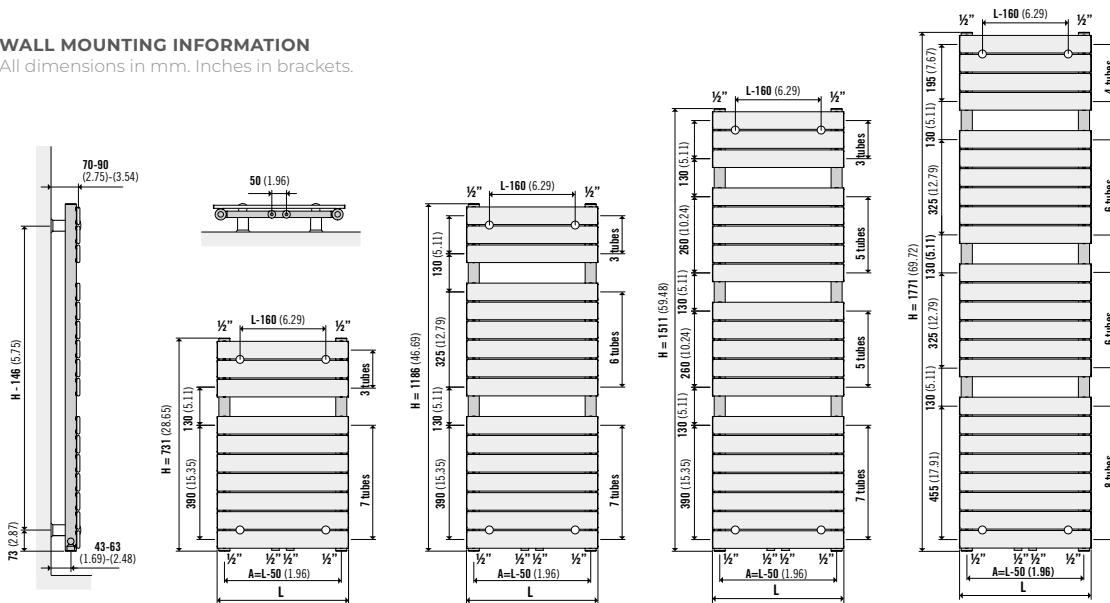


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

Single

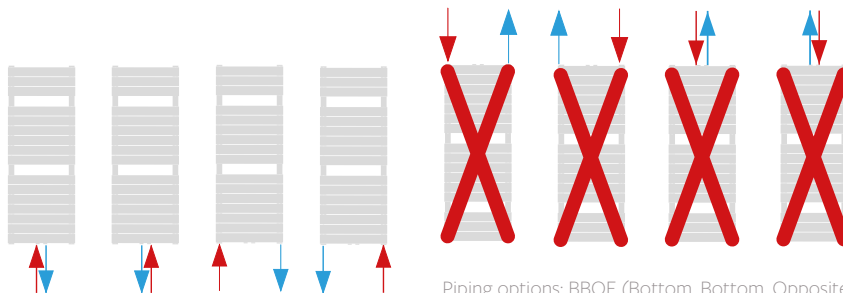

Piping options: BBOE (Bottom, Bottom, Opposite, End)

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single							
Height	731	731	1186	1186	1511	1511	1771	1771
Length	450	600	450	600	450	600	450	600
W/m at 75/65/20	342	447	530	694	666	869	777	1010
n-coefficients	1.21	1.20	1.25	1.23	1.24	1.23	1.24	1.23
Heated surface area (m ² /m)	0.82	1.03	1.32	1.66	1.65	2.08	1.97	2.48
Weight (kg/m)	8.90	11.20	14.30	17.90	17.90	22.40	21.40	26.80
Water contents (l/m)	3.20	3.80	5.20	6.20	6.60	7.80	7.80	9.30

COLOUR GUIDE


RAL COLOURS




RAL 7035
Pale grey




RAL 7038
Agate grey



RAL 7036
Platinum grey




RAL 7030
Stone grey



RAL 7037
Dusty grey



RAL 7015
Slate grey



RAL 9005*
Jet black



RAL 8017
Chocolate brown



RAL 1016
Sulphur yellow



RAL 1021
Cadmium yellow



RAL 1004
Dark Golden yellow



RAL 2008
Light red orange




RAL 3000
Flame red




RAL 3003
Ruby red




RAL 3005
Wine red




RAL 6027
Light green




RAL 6034
Pastel turquoise




RAL 6019
Pastel green




RAL 6033
Turquoise blue



RAL 6020
Chrome green




RAL 6005
Light moss green




RAL 5014
Pigeon blue



RAL 5002
Ultramarine blue



RAL 5024
Pastel blue



RAL 5022
Night blue



RAL 5010
Gentian blue



RAL 9016
Traffic white



RAL 9010
Pure white



RAL 9001
Cream



RAL 1013
Pearl white



RAL 1015
Light ivory




RAL 9002
Grey white


METALLIC COLOURS



N206 BR0006
Silver metallic



N204 BR0004
Bronze metallic



N206 BR0007
Grey metallic

To request up to
5 colour samples, please
email sales@stelrad.com
with your choices and
address details.

The colours shown are reproduced
as accurately as this printing
process will allow.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM

 RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
sales@stelrad.com