

HOME

SERIES



Concord
Rail

CONCORD RAIL

50 Δ t

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Length mm	Tap centres	Stelrad UIN	Watts	Heat output Btu/hr
731	450	400	148581h	342	1167
	600	550	148582h	447	1525
1186	450	400	148583h	530	1808
	600	550	148584h	694	2368
1511	450	400	148585h	666	2272
	600	550	148586h	869	2965
1771	450	400	148587h	777	2651
	600	550	148588h	1010	3446


Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CONCORD RAIL

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

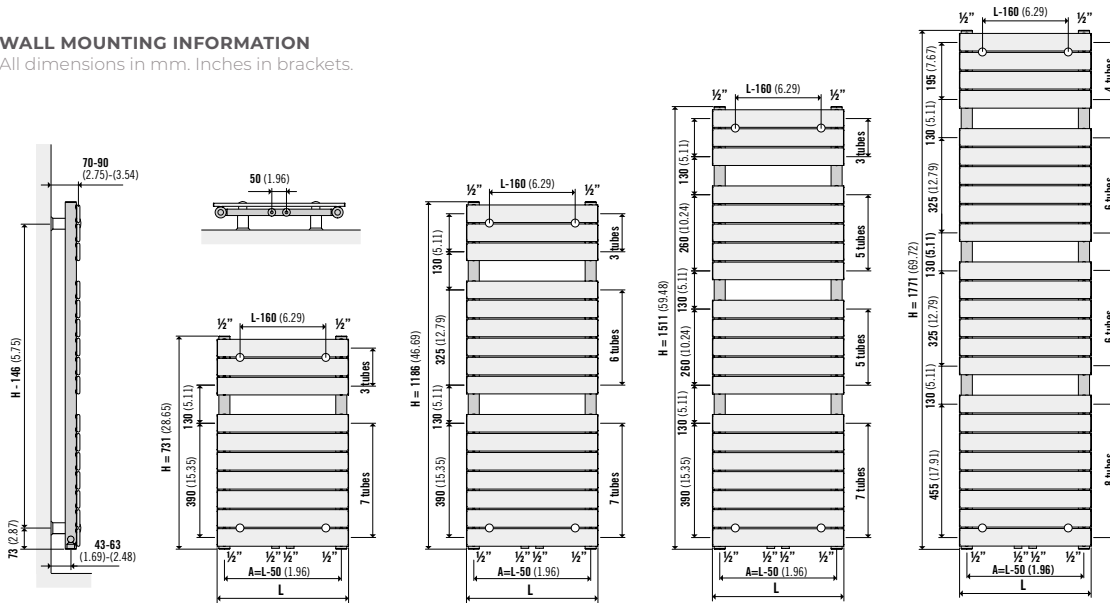


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

Single

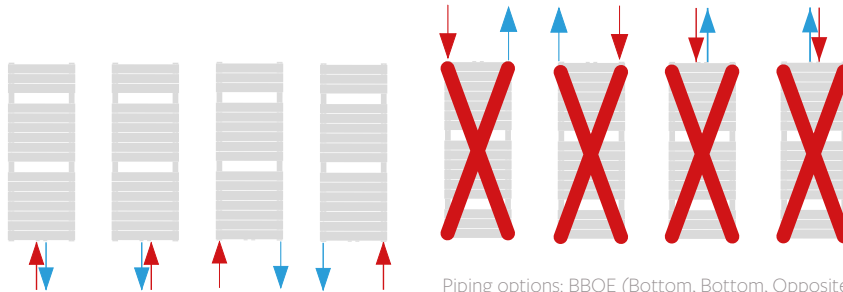

Piping options: BBOE (Bottom, Bottom, Opposite, End)

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single							
Height	731	731	1186	1186	1511	1511	1771	1771
Length	450	600	450	600	450	600	450	600
W/m at 75/65/20	342	447	530	694	666	869	777	1010
n-coefficients	1.21	1.20	1.25	1.23	1.24	1.23	1.24	1.23
Heated surface area (m ² /m)	0.82	1.03	1.32	1.66	1.65	2.08	1.97	2.48
Weight (kg/m)	8.90	11.20	14.30	17.90	17.90	22.40	21.40	26.80
Water contents (l/m)	3.20	3.80	5.20	6.20	6.60	7.80	7.80	9.30

COLOUR GUIDE

NATURAL COLOURS



NT110
Papyrus white




NT120
Pearl white



NT130
Champagne




NT140
Beige



NT150
Beige grey



NT160
Pebble grey




NT170
Quartz grey



SN110
Cream white




SN120
Cream




SN130
Mocca




SN140
Bordeaux



SN150
Sepia



SN160
Pale blue




SN170
Black


METALLIC COLOURS




ML110
Dove grey




ML120
Titanium grey




ML130
Blue grey




ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL COLOURS



A1004
Golden yellow



A2003
Pastel orange



A3002
Carmine red



A3003
Robin red




A5002
Ultramarine blue




A6018
Yellow green




A7001
Silver grey



A7011
Iron grey




A7016
Anthracite grey



A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white



A9005
Jet black

To request up to
5 colour samples, please
email sales@stelrad.com
with your choices and
address details.

The colours shown are reproduced
as accurately as this printing
process will allow.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM

 RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
sales@stelrad.com