

HOME

SERIES



Concord
Slimline
Coloured

CONCORD SLIMLINE COLOURED

50 Δ t
(75/65/20°C)

SINGLE

Height mm	Length mm	Elements	Stelrad UIN	Watts	Heat output Btu/hr
1800	320	8	148448h	872	2975
	440	11	148449h	1199	4091
	520	13	148450h	1417	4835
	640	16	148451h	1744	5951
2000	320	8	148452h	978	3337
	440	11	148453h	1344	4586
	520	13	148454h	1589	5422
	640	16	148455h	1956	6674

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CONCORD SLIMLINE COLOURED

WALL MOUNTING INFORMATION


All dimensions in mm. Inches in brackets.

Type	Back face to finished wall D		Connection centres from finished wall D1		Front face from finished wall D2	
	mm	mm	mm	mm	mm	mm
Slimline	35	138	50	197	130	512

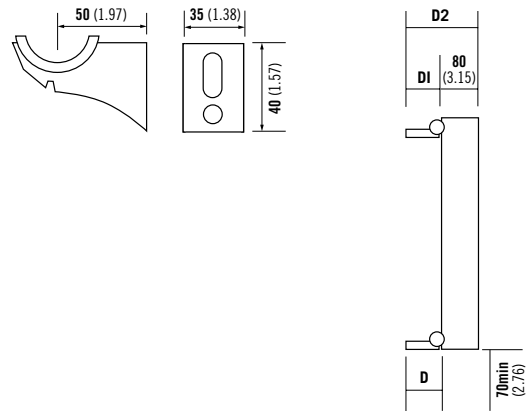


FIXING POSITIONS

All dimensions in mm. Inches in brackets.

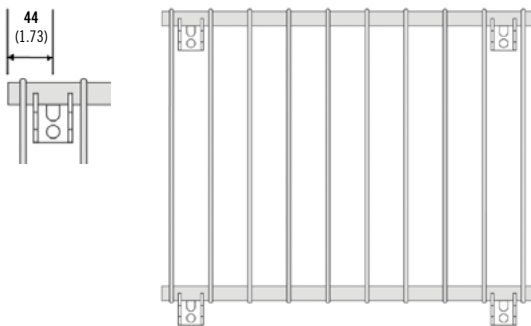

PIPING INSTRUCTIONS

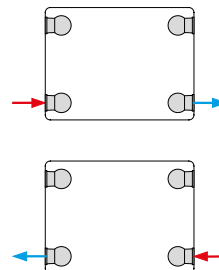

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Slimline	
Height	1800	2000
W/m at 75/65/20	2725	3056
n-coefficients	1.30	1.31
Heated surface area (m ² /m)	6.90	7.65
Weight (kg/m)	77.81	78.50
Water contents (l/m)	17.50	19.25
Wall to tap centre (mm)	50	50


STEEL THICKNESS 1.5mm

COLOUR GUIDE


RAL COLOURS




RAL 7035
Pale grey



RAL 7038
Agate grey




RAL 7036
Platinum grey




RAL 7030
Stone grey



RAL 7037
Dusty grey



RAL 7015
Slate grey



RAL 9005*
Jet black



RAL 8017
Chocolate brown



RAL 1016
Sulphur yellow



RAL 1021
Cadmium yellow



RAL 1004
Dark Golden yellow



RAL 2008
Light red orange




RAL 3000
Flame red




RAL 3003
Ruby red




RAL 3005
Wine red




RAL 6027
Light green



RAL 6034
Pastel turquoise



RAL 6019
Pastel green




RAL 6033
Turquoise blue



RAL 6020
Chrome green




RAL 6005
Light moss green



RAL 5014
Pigeon blue



RAL 5002
Ultramarine blue



RAL 5024
Pastel blue



RAL 5022
Night blue



RAL 5010
Gentian blue



RAL 9016
Traffic white



RAL 9010
Pure white



RAL 9001
Cream



RAL 1013
Pearl white



RAL 1015
Light ivory




RAL 9002
Grey white


METALLIC COLOURS



N206 BR0006
Silver metallic



N204 BR0004
Bronze metallic



N206 BR0007
Grey metallic

To request up to
5 colour samples, please
email sales@stelrad.com
with your choices and
address details.

The colours shown are reproduced
as accurately as this printing
process will allow.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM

 RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
sales@stelrad.com