

HOME

SERIES



Horizontal
Line
Concept

HORIZONTAL LINE CONCEPT

50 Δ t
(75/65/20°C)



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/h		Watts	Btu/h
600	400	22601104h	348	1,188	22602204h	640	2,184
	600	22601106h	522	1,782	22602206h	961	3,280
	800	22601108h	696	2,375	22602208h	1,281	4,372
	1000	22601110h	870	2,969	22602210h	1,601	5,464
	1200	22601112h	1,044	3,563	22602212h	1,921	6,556
	1400	22601114h	1,218	4,157	22602214h	2,242	7,649


Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

HORIZONTAL LINE CONCEPT


WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

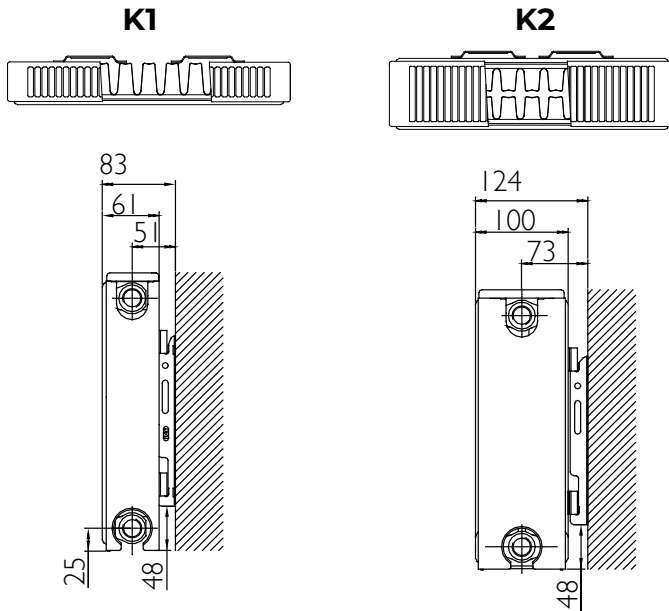

MOUNTING BRACKETS

All dimensions in mm. Inches in brackets. Floor mounting brackets available.

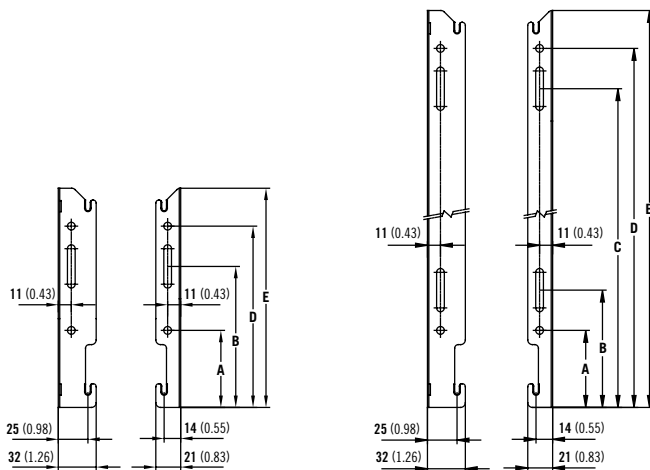


Dimensions	mm	inches
Height	600	23.62
A	65	2.56
B	99	3.90
C	419	16.50
D	453	17.83
E	485	19.09

HORIZONTAL LINE CONCEPT

K1 & K2 LUG POSITIONS (New as of June 2016).


All dimensions in mm. Inches in brackets.

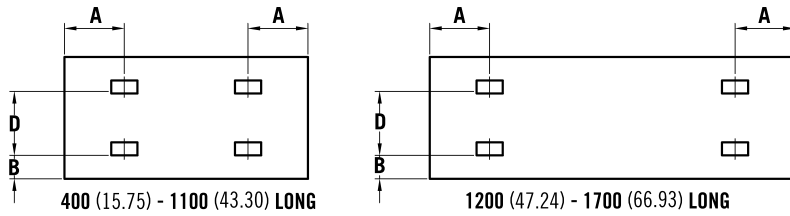

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

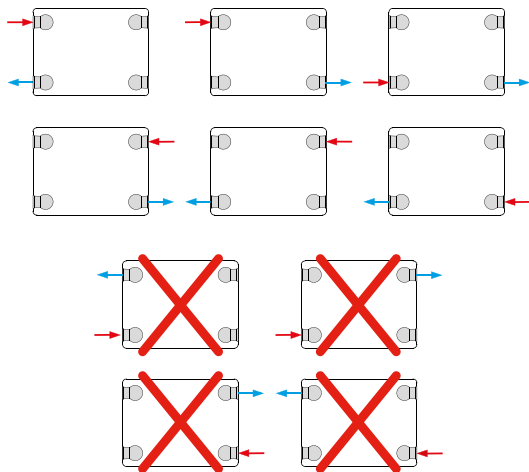

HORIZONTAL LINE CONCEPT

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1			K2		
	300	450	600	300	450	600
Height	300	450	600	300	450	600
W/m at 75/65/20	469	701	911	929	1296	1634
n-coefficients	1.30	1.29	1.28	1.30	1.31	1.32
Heated surface area (m ² /m)	2.09	3.37	4.66	3.51	5.62	7.74
Weight (kg/m)	11.88	18.26	24.65	19.60	29.80	40.00
Water contents (l/m)	1.89	2.49	3.25	3.70	5.05	6.60
Wall to tap centre (mm)	51	51	51	73	73	73

PRESSURE DROP

