

HOME

SERIES



Vertical
Ultra

VERTICAL ULTRA

50 Δ t
(75/65/20°C)

K2




Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Heat output	
					Watts	Btu/hr
1040	1000	470	400	86110224h	857	2924
		570	500	86110225h	1071	3654
		670	600	86110226h	1285	4384
1240	1200	470	400	86112224h	999	3409
		570	500	86112225h	1249	4262
		670	600	86112226h	1499	5115
1840	1800	470	400	86118224h	1476	5036
		570	500	86118225h	1845	6295
		670	600	86118226h	2214	7554
2040	2000	470	400	86120224h	1584	5405
		570	500	86120225h	1980	6756
		670	600	86120226h	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV



UIN	Elements	UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM	14531610	CENTRE TAP TRV ANGLED L CHROME -10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN	14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM	14531615	CENTRE TAP TRV ANGLED L CHROME -15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM	14531710	CENTRE TAP TRV ANGLED R WHITE -10MM*
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN	14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN*
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM	14531715	CENTRE TAP TRV ANGLED R WHITE -15MM*
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM	14531810	CENTRE TAP TRV ANGLED R CHROME -10MM*
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN	14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN*
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM	14531815	CENTRE TAP TRV ANGLED R CHROME -15MM*

Available for the Vertical Line Vertical, Flat Vertical, Caliente Rail,* Concord Rail,* Vertical Ultra, Concord Side Concept, Concord Side Chrome, Vertical Line Vertical Concept & Flat Vertical Concept.

*Angled Right Centre Tap TRV's only available for towel rails.

ULTRA TOWEL RAIL BAR

Fits emitter length		Stelrad UIN	Radiator Height	Max no. of bars
400mm wide		83200004	1000	1
500mm wide		83200005	1200	2
600mm wide		83200006	1800	3
			2000	3




Towel rail bar is 120mm wider than actual radiator.

Maximum three towel rail bars per radiator.
For more information visit www.stelrad.com

VERTICAL ULTRA

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

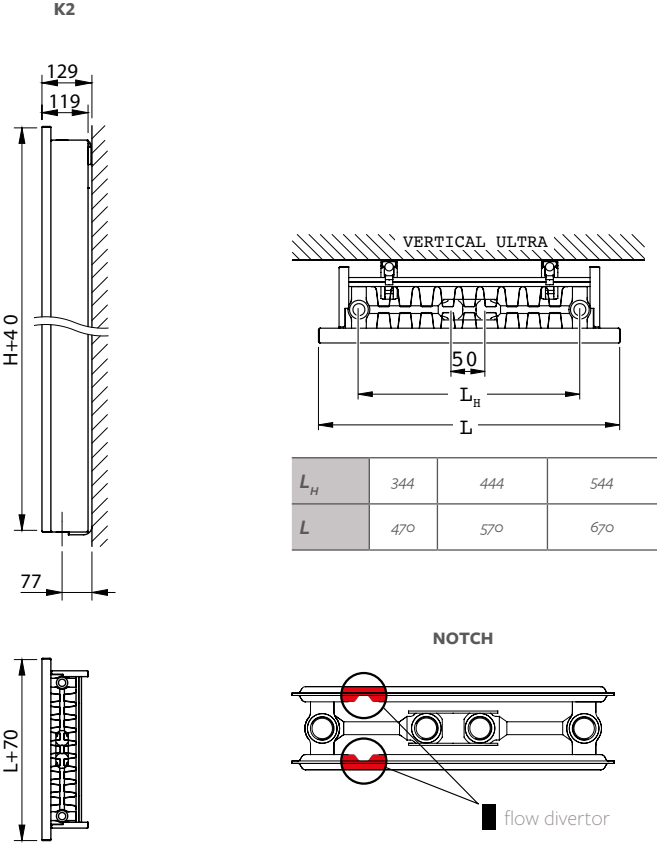

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

VERTICAL ULTRA

PIPE CONNECTIONS

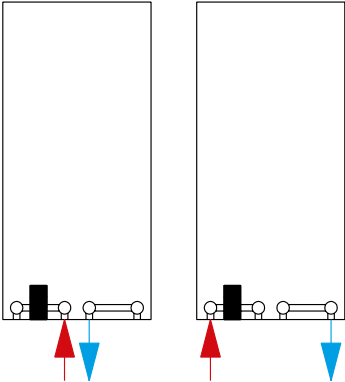


TABLE OF HEAT OUTPUTS AT:

Inlet	75°C	Watt to Btu/hr:
Outlet	65°C	3.412
Ambient	20°C	3.412
Delta T	50°C	3.412

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	T22 (K2)			
	1000	1200	1800	2000
Height (mm)	1000	1200	1800	2000
W/m at 75/65/20	2142	2498	3690	3960
n-coefficients	1.29	1.30	1.33	1.33
Heated surface area (m ² /m)	26.23	27.15	29.90	37.74
Weight (kg/m)	59.40	71.80	105.30	116.40
Water contents (l/m)	10.30	12.30	15.90	17.70
KM	13.62	15.66	20.70	21.98

COLOUR GUIDE

NATURAL COLOURS




NT110
Papyrus white



NT120
Pearl white



NT130
Champagne




NT140
Beige



NT150
Beige grey



NT160
Pebble grey




NT170
Quartz grey



SN110
Cream white




SN120
Cream




SN130
Mocca




SN140
Bordeaux



SN150
Sepia



SN160
Pale blue



SN170
Black

METALLIC COLOURS




ML110
Dove grey




ML120
Titanium grey




ML130
Blue grey




ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL COLOURS



A1004
Golden yellow



A2003
Pastel orange




A3002
Carmine red




A3003
Robin red




A5002
Ultramarine blue




A6018
Yellow green




A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey



A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white



A9005
Jet black

To request up to
5 colour samples, please
email sales@stelrad.com
with your choices and
address details.

The colours shown are reproduced
as accurately as this printing
process will allow.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
sales@stelrad.com