

# HOME

SERIES



Classic  
Compact  
Vertical

BRINGING RADIATOR STYLE INTO UK HOMES

# CLASSIC COMPACT VERTICAL




## 50 $\Delta$ t

(75/65/20°C)

P2



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/h	Stelrad UIN	Heat output Watts	Heat output Btu/h
<b>1600</b>	300	-	-	-	31162203h	1089	3716
	400	-	-	-	31162204h	1452	4954
	500	-	-	-	31162205h	1815	6193
	600	-	-	-	31162206h	2178	7432
<b>1800</b>	300	-	-	-	31182203h	1188	4054
	400	148095h	1146	3911	89121418h	1584	5405
	500	-	-	-	89122518h	1980	6756
	600	148103h	1719	5867	89122618h	2376	8107
<b>2000</b>	700	148107h	2006	6846	31182207h	2772	9458
	400	148096h	1248	4259	31202204h	1716	5855
	500	-	-	-	31202205h	2145	7319
	600	148104h	1872	6389	31202206h	2574	8782
<b>2200</b>	700	148108h	2184	7454	31202207h	3003	10246
	300	-	-	-	31222203h	1386	4729
	400	148097h	1356	4628	31222204h	1848	6305
	500	-	-	-	31222205h	2310	7882
<b>2200</b>	600	148105h	2034	6942	31222206h	2772	9458
	700	148109h	2373	8099	-	-	-

$\Delta$ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta$ t40 or  $\Delta$ t30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.


### CENTRE TAP TRV



UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE - 10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE - 1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE - 15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME - 10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME - 1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME - 15MM
14531510	CENTRE TAP TRV ANGLED L WHITE - 10MM
14531512	CENTRE TAP TRV ANGLED L WHITE - 1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE - 15MM
14531610	CENTRE TAP TRV ANGLED L CHROME - 10MM
14531612	CENTRE TAP TRV ANGLED L CHROME - 1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME - 15MM


## WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

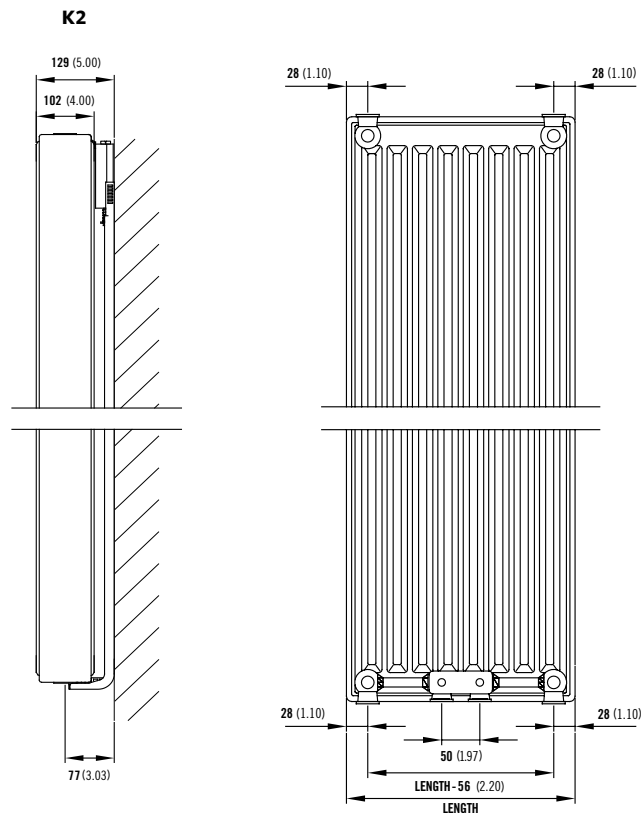

Comes complete with Stelrad's class leading safety bracket.

## MOUNTING BRACKETS




Height		H2		H3		H4	
mm	inches	mm	inches	mm	inches	mm	inches
1800	70.87	70	2.75	830	43.89	1590	63.58

## CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

## PIPING OPTIONS

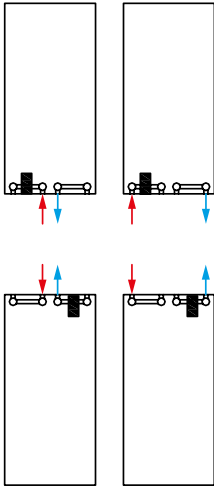

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K2
Height	1800
W/m at 75/65/20	3960
n-coefficients	1.33
Heated surface area (m <sup>2</sup> /m)	29.90
Weight (kg/m)	88.80
Water contents (l/m)	16.20
Wall to tap centre (mm)	77
K <sub>M</sub>	21.69

## PRESSURE DROPS



Type	Kv
P1 / K1	1.60
P2 / P+ / K2	1.85