

HOME


SERIES



Classic
Compact
K3

CLASSIC COMPACT K3

50 Δ t
(75/65/20°C)




Height mm	Length mm	Stelrad UIN	Watts	Heat output	Btu/hr
300	1000	76303310h	1,349		4,603
	2000	76303320h	2,698		9,206
500	600	76503306h	1,234		4,210
	700	76503307h	1,439		4,910
	800	76503308h	1,645		5,613
	900	76503309h	1,850		6,312
	1000	76503310h	2,056		7,015
	1100	76503311h	2,262		7,718
	1200	76503312h	2,467		8,417
	1400	76503314h	2,878		9,820
	1600	76503316h	3,290		11,225
	1800	76503318h	3,701		12,628
	2000	76503320h	4,112		14,030
	2400	76503324h	4,934		16,835
600	400	76603304	956		3,262
	500	76603305	1,195		4,077
	600	76603306	1,433		4,889
	700	76603307	1,672		5,705
	800	76603308	1,911		6,520
	900	76603309	2,150		7,336
	1000	76603310	2,389		8,151
	1100	76603311	2,628		8,967
	1200	76603312	2,867		9,782
	1400	76603314	3,345		11,413
	1600	76603316	3,822		13,041
	1800	76603318	4,300		14,672
2000	76603320	4,778		16,303	
2400	76603324	5,734		19,564	
700	500	76703305h	1,356		4,627
	600	76703306h	1,627		5,551
	700	76703307h	1,898		6,476
	800	76703308h	2,170		7,404
	900	76703309h	2,441		8,329
	1000	76703310h	2,712		9,253
	1100	76703311h	2,983		10,178
	1200	76703312h	3,254		11,103
	1400	76703314h	3,797		12,955
	1600	76703316h	4,339		14,805
	1800	76703318h	4,882		16,657
	2000	76703320h	5,424		18,507

CLASSIC COMPACT K3

WALL MOUNTING AND LUG INFORMATION


All dimensions in mm. Inches in brackets.

REAR ELEVATION

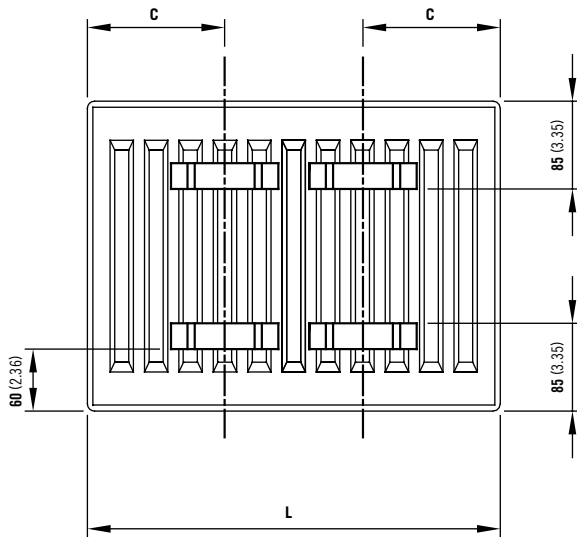


L	C
400 - 1100	133
1200 - 2400	133

SIDE ELEVATION

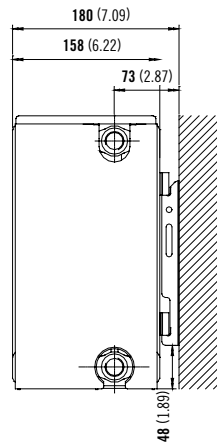

TOP ELEVATION

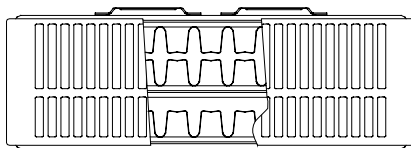



CLASSIC COMPACT K3

FLOORSTANDING BRACKETS

All dimensions in mm. Inches in brackets.



Floor brackets

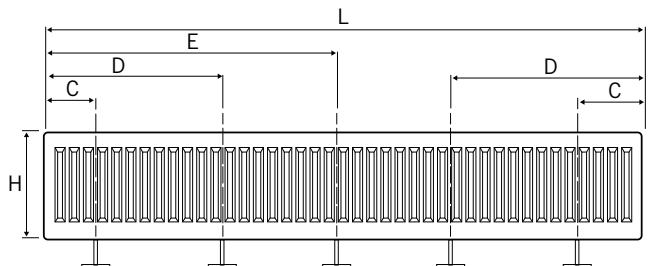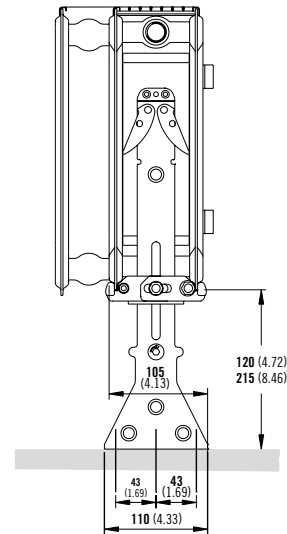

	L	400	500 - 1100	1200	1400 - 1800	2000 - 3000
H	Number	2pc				3pc
300	C	117	150	250	250	250
500	E	-	-	-	-	L/2+17

	L	400	500 - 1100	1200	1400 - 1800	2000	2200	2400	2600	2800	3000
H	Number	2pc			3pc	4pc			5pc		
600	C	117	150	250	250	250			250		
700	D	-	-	-	-	750	817	850	750	817	850
	E	-	-	-	817	-	-	-	L/2+17		

CONNECTIONS


Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K3			
Height	300	500	600	700
W/m at 75/65/20	1349	2056	2389	2712
n-coefficients	1.31	1.32	1.32	1.34
Heated surface area (m2/m)	5.26	9.49	11.61	13.72
Weight (kg/m)	25.20	43.40	52.50	60.77
Water contents (l/m)	5.40	8.33	9.80	11.37
Wall to tap centre (mm)	73	73	73	73

CLASSIC COMPACT K3

PRESSURE DROPS

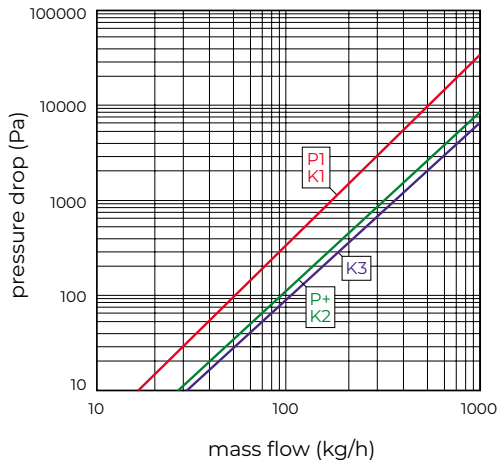

Type	Kv
P1 / K1	1.67
P+ / K2	3.32
K3	3.65