

# HOME

SERIES

*Concord  
Timeline  
Concept*

**50 $\Delta$ t**  
(75/65/20°C)

**SINGLE**



| Height<br>mm | Length<br>mm | Elements | Stelrad<br>UIN | Heat output |        |
|--------------|--------------|----------|----------------|-------------|--------|
|              |              |          |                | Watts       | Btu/hr |
| <b>1800</b>  | 320          | 8        | 448658h        | 872         | 2975   |
|              | 440          | 11       | 448659h        | 1199        | 4091   |
|              | 520          | 13       | 448660h        | 1417        | 4835   |
|              | 640          | 16       | 448661h        | 1744        | 5951   |

$\Delta$ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta$ t40 or  $\Delta$ t30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.



WARRANTY



IN STOCK




ANTHRACITE  
GREY ONLY

## WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

| Type     | Back face to finished wall D |        | Connection centres from finished wall D1 |        | Front face from finished wall D2 |        |
|----------|------------------------------|--------|--|--------|----------------------------------|--------|
|          | mm                           | inches | mm                                       | inches | mm                               | inches |
| Slimline | 35                           | 1.38   | 50                                       | 1.97   | 130                              | 5.12   |

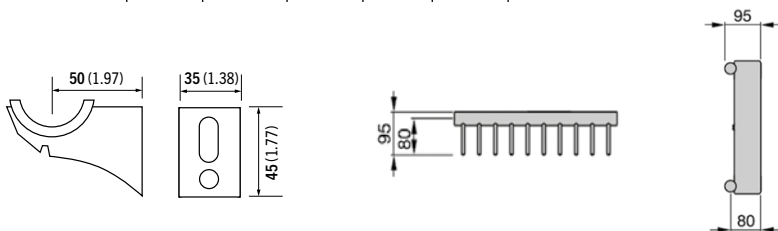

## FIXING POSITIONS

All dimensions in mm. Inches in brackets.



## CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

| Type                                    | Slimline |       |
|---|----------|-------|
| Height                                  | 1800     | 2000  |
| W/m at 75/65/20                         | 2725     | 3056  |
| n-coefficients                          | 1.30     | 1.31  |
| Heated surface area (m <sup>2</sup> /m) | 6.90     | 7.65  |
| Weight (kg/m)                           | 77.81    | 78.50 |
| Water contents (l/m)                    | 17.50    | 19.25 |
| Wall to tap centre (mm)                 | 50       | 50    |

## STEEL THICKNESS 1.5MM

## PIPING INSTRUCTIONS

